


COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS

REVIEWED BY:
Joe Young
JOE YOUNG 2/12/01
CONSULTANT DESIGN SECTION DATE


CALIFORNIA BOULEVARD

FROM ROSEMEAD BOULEVARD TO
400' WEST OF EATON WASH
TOTAL LENGTH 0.63 MILE

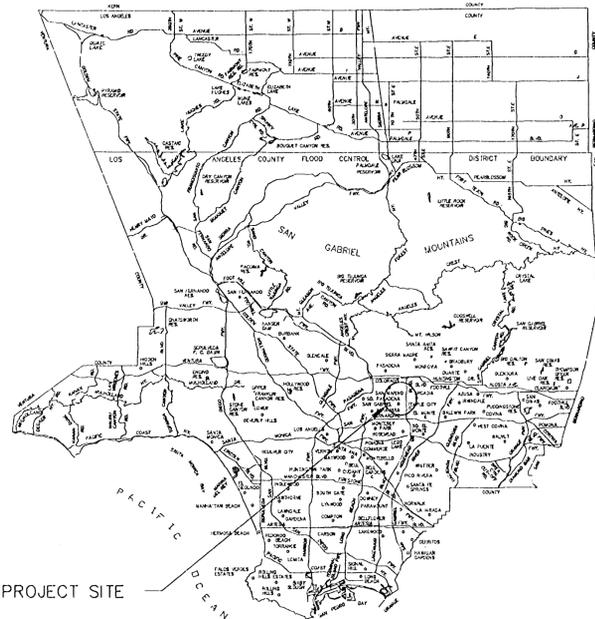

Thomas Bros. Pg. 566 - G2, H6.

LOCATION MAP

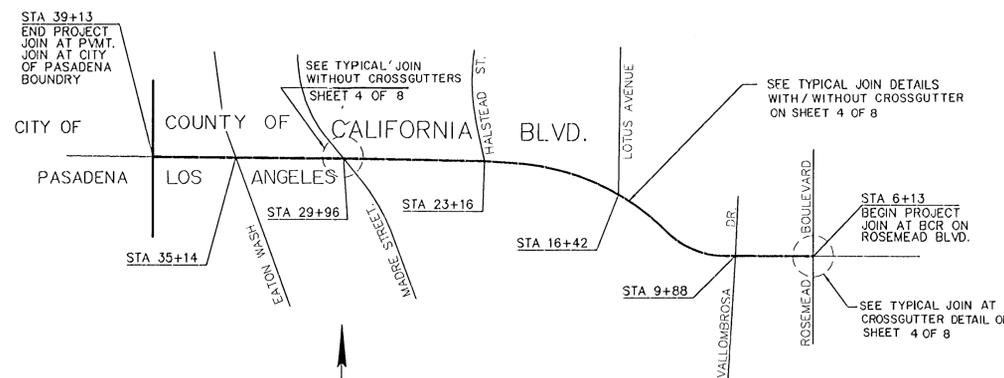

KEY MAP
NO SCALE

CONSTRUCTION LEGEND


- (13) COLD MILL ASPHALT CONCRETE PAVEMENT
(5' WIDE ADJACENT TO GUTTER)
- (22) RUBBERIZED ASPHALT CONCRETE (RBAC)

CONSTRUCTION NOTES

1. PRIME CONTRACTOR LICENSE REQUIRED: CLASS A OR C12.
2. ALL STRUCTURES SHALL BE CONSTRUCTED PER APWA STD. PLANS UNLESS OTHERWISE SHOWN.
3. THE CONTRACTOR SHALL CONTACT MR. DOUG WALTON OF COUNTY SANITATION DISTRICTS, FORTY EIGHT HOURS PRIOR TO COMMENCEMENT OF THE PROJECT AT (310) 638-1161. SEE SPECIFICATIONS FOR THE PROCEDURE TO BE TAKEN IN ADJUSTING DISTRICTS' MANHOLES TO NEW STREET SURFACE.
4. PRIOR TO PLACING RBAC PAVEMENT, FILL ALL CRACKS WIDER THAN 1/4" WITH TYPE "E" HOT MIXED ASPHALT CONCRETE. THE COST TO SEAL CRACKS SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE FOR RBAC PAVEMENT. FILL ALL POP-OUTS WITH TYPE "E" ASPHALT CONCRETE.
5. FIELD DENSITY AFTER ROLLING OF ALL RBAC PAVEMENT PLACED ON THIS PROJECT SHALL BE A MINIMUM OF 95 PERCENT RELATIVE COMPACTION, PER SUBSECTION 302-5.6.2 OF THE STANDARD SPECIFICATIONS.
6. DROPOFFS ON THE PAVEMENT OVER 1" IN HEIGHT THAT WILL REMAIN OVERNIGHT SHALL BE RAMPED WITH TEMPORARY AC PAVEMENT. THE COST SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE FOR RBAC PAVEMENT.
7. THE CONTRACTOR SHALL LOCATE AND ADJUST ALL STORM DRAIN AND SEWER MANHOLES TO NEW STREET SURFACE AT THE CONTRACT UNIT PRICE FOR DOUBLE ADJUST MANHOLE.
8. DO NOT COLD MILL OVER EXISTING MANHOLES OR CATCH BASIN LOCAL DEPRESSIONS AND DO NOT COLD MILL OVER EXISTING TRAFFIC DETECTOR LEADINS UNTIL THE SIGNAL PHASING IS SET TO PRE-TIMED BY THE SIGNAL MAINTENANCE PERSONNEL. CONTACT PAUL WOLFORD OF THE LACDPW OPERATIONAL SERVICES DIVISION AT (626) 458-1700 EXTENSION 1629 TO COORDINATE THE DETECTOR WORK.
9. EXISTING TRAFFIC DETECTOR CONDUIT "STUB-OUT" SHALL BE PROTECTED IN PLACE DURING CONSTRUCTION.
10. SEE DETAIL "A" AND DETAIL "B" ON SHEET 8 OF 8 FOR TYPICAL JOIN DETAILS.
11. NO WORK IS TO BE PERFORMED IN THE CITY OF PASADENA.

CONSTRUCTION SYMBOLOLOGY

- (No) INDICATES WORK PER CONSTRUCTION LEGEND
- 2" P4 ABOVE LINE: TYPE OF STD. PLAN OR THICKNESS OF SURFACE MATERIAL IN INCHES.
- 12" CMB BELOW LINE: THICKNESS OF BASE MATERIAL IN INCHES.

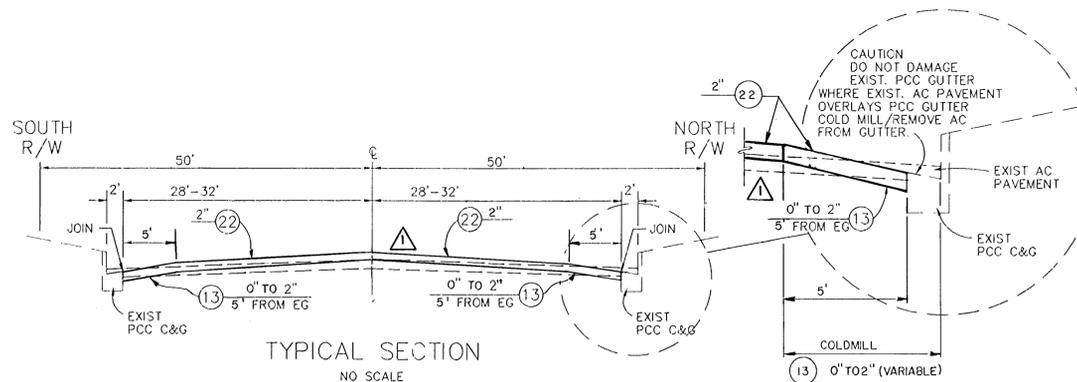

TYPICAL SECTION
NO SCALE

DATE _____
REVIEWED BY: RN _____
CAO PROJECT FILE NAME: RDC0012976_HYD_SHEET7.DGN
CHECKER: BH _____
DESIGNER: FCS _____
DRAFTER: MS _____

DATE	MK	DESCRIPTION
12-13-01	△	CHANGED PROJECT NAME
4-09-01	△	REVISED TYPICAL SECTION DRAWING
REVISIONS		

Bryant-Palmer-Soto Inc.
REGISTERED PROFESSIONAL ENGINEER
Richard O. Scrombray
No. 27292
Exp. 3/31/01

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS
CALIFORNIA BOULEVARD, ET. AL.
CALIFORNIA BLVD. FROM ROSEMEAD BLVD TO
400 FEET WEST OF EATON WASH

