COUNTY OF LOS ANGELES
DEPARTMENT OF PUBLIC WORKS

SIERRA MADRE BLVD., ET AL.

NEW YORK DRIVE 225' W/O ALTADENA DRIVE TO 850' E/O ALTADENA DRIVE

TOTAL LENGTH = 0.2 MILES

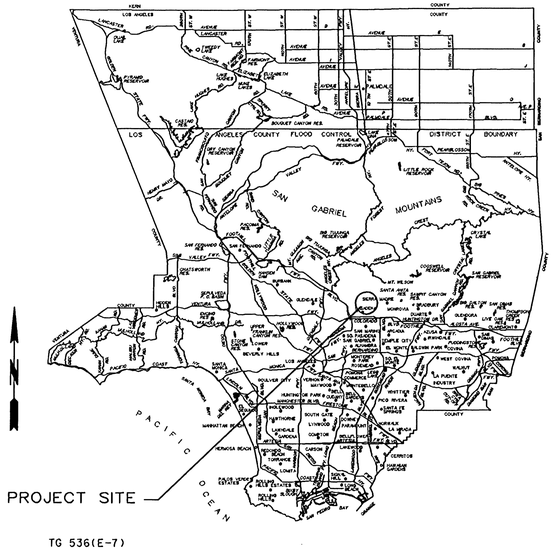

TG 536(E-7)

LOCATION MAP

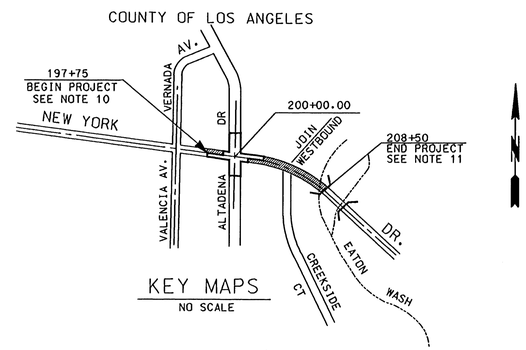

KEY MAPS
NO SCALE

INDEX

SHEET 9	TITLE SHEET AND TYPICAL SECTIONS, AND TABLES
PLAN S	STRIPING PLAN

CONSTRUCTION LEGEND

- (1) PORTLAND CEMENT CONCRETE CURB AND GUTTER.
- (5) PORTLAND CEMENT CONCRETE SIDEWALK, 4" THICK.
- (8) ASPHALT CONCRETE PAVEMENT.
- (13) COLD MILL ASPHALT CONCRETE PAVEMENT.
- (22) RUBBERIZED ASPHALT CONCRETE
- (24) FURNISH AND PLANT TREE (SEE CONSTRUCTION NOTE 16)
- (25) ROOT PRUNE TREE AND INSTALL ROOT CONTROL BARRIER (SEE CONSTRUCTION NOTE 15)
- (26) TREE WELL (TYPE 3, CASE 3)

TABLE 1.1

APPROX. LOCATION ON NEW YORK DRIVE	(1) LF	(5) SF	(25) ROOT PRUNE TREE EA	(26) TREE WELL EA	(24) EA
SOUTH SIDE IMPROVEMENTS					
STA					
204 + 98				1	1
205 + 48			1	1	
205 + 98			1	1	
206 + 90			1	1	
208 + 55		5			
NORTH SIDE IMPROVEMENTS					
STA					
199 + 40	5				

CONSTRUCTION NOTES

1. PRIME CONTRACTOR LICENSE REQUIRED: CLASS A OR C12.
2. ALL STRUCTURES SHALL BE CONSTRUCTED PER APWA STD. PLANS UNLESS OTHERWISE SHOWN.
3. THE CONTRACTOR SHALL CONTACT MR. CALVIN JIN OF COUNTY SANITATION DISTRICTS, FORTY EIGHT HOURS PRIOR TO COMMENCEMENT OF THE PROJECT AT (310) 638-1161 SEE SPECIFICATIONS FOR THE PROCEDURE TO BE TAKEN IN ADJUSTING DISTRICTS' MANHOLES TO NEW STREET SURFACE.
4. DROPOFFS ON THE PAVEMENT OVER 1" IN HEIGHT THAT WILL REMAIN OVERNIGHT SHALL BE RAMPED WITH TEMPORARY AC PAVEMENT. THE COST SHALL BE INCLUDED IN THE CONTRACT UNIT PRICE FOR ARHM PAVEMENT.
5. THE CONTRACTOR SHALL LOCATE AND ADJUST ALL STORM DRAIN AND SEWER MANHOLES TO NEW STREET SURFACE AT THE CONTRACT UNIT PRICE FOR DOUBLE ADJUST MANHOLE.
6. DO NOT COLD MILL OVER EXISTING MANHOLES OR CATCH BASIN LOCAL DEPRESSIONS AND DO NOT COLD MILL OVER EXISTING TRAFFIC DETECTOR LEADINS UNTIL THE SIGNAL PHASING IS SET TO PRE-TIMED BY THE SIGNAL MAINTENANCE PERSONNEL. CONTACT PAUL WOLFORD OF THE LACDPW OPERATIONAL SERVICES DIVISION AT (626) 458-1700 EXTENSION 1629 TO COORDINATE THE DETECTOR WORK.
7. EXISTING TRAFFIC DETECTOR CONDUIT "STUB-OUT" SHALL BE PROTECTED IN PLACE DURING CONSTRUCTION
8. FURNISH AND PLANT 15 GALLON TREE PER APWA STD. PLANS 518-2 (DOUBLE STAKING) AND 520-2 (CASE 1) AT ALL LOCATIONS AS SHOWN ON PLAN OR AS DIRECTED BY THE ENGINEER. TREE SPECIES TO BE PLANTED ARE AS FOLLOWS: NEW YORK - BRISBANE BOX
9. INSTALL SIDEWALK TREE WELL PER APWA STD. PLAN 519-3 (TYPE 3 , CASE 3. LOCATION IS SUBJECT TO MINIMUM CLEARANCES GIVEN IN APWA STD. PLAN 519-3.
10. FOR WEST PROJECT LIMITS, JOIN EXISTING PAVEMENT ON N/S OF NEW YORK DRIVE WEST OF ALTADENA DR., 105' WEST OF EDGE OF PCC PAVEMENT. FOR THE THE S/S, JOIN AT EDGE OF PCC PAVEMENT E/O ALTADENA DRIVE.
11. FOR EAST PROJECT LIMITS, JOIN EXISTING CONCRETE PAVEMENT AT BRIGDE.
12. TRENCH BACKFILL SHALL BE 270-E-500 SLURRY WHERE NEW CURB AND GUTTER IS ADJACENT TO EXISTING PAVED ROADWAY.

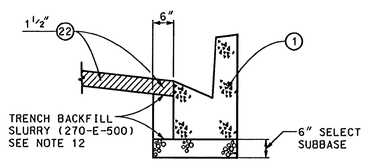

CURB & GUTTER REPLACEMENT
NO SCALE

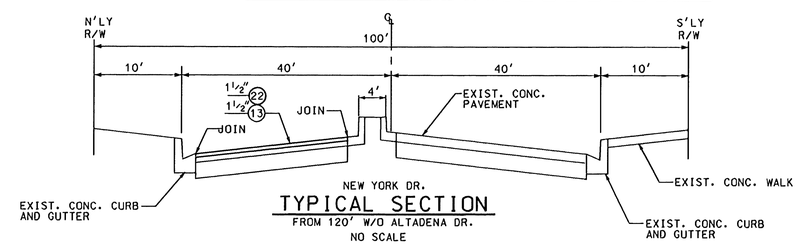

TYPICAL SECTION
FROM 120' W/O ALTADENA DR.
NO SCALE

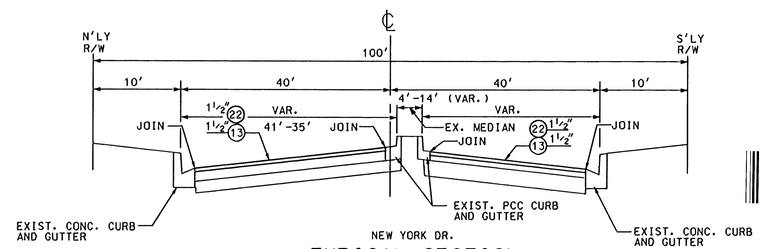

TYPICAL SECTION
FROM ALTADENA DR. TO 895' E/O ALTADENA DR.
NO SCALE

PH074921

DRAFTER DING MARTINEZ	DESIGNER PENNY LEW	CHECKER
CADD PROJECT FILE NAME RDC0012976_HYD_SHEET_9.DGN		

NORRIS·REPKE
A Subsidiary of Westrian
400 N. Tustin Avenue Suite 230
Santa Ana, CA 92705-3813
Tel (714) 973-2230
Fax (714) 973-2263

Prepared under the Supervision of:
BDMattern 12388 5/30/01
BRUCE D. MATTERN RCE DATE

TWO DAYS BEFORE YOU DIG
CALL USA TOLL FREE
1-800-422-4133

APPROVED HARRY W. STONE DIRECTOR OF PUBLIC WORKS
BY _____ DEPUTY DIRECTOR DATE

RECOMMENDED
BY _____ ASSISTANT DEPUTY DIRECTOR DATE

SUBMITTED
BY James S. Munro 7/17/01
DATE

DATE	MK	DESCRIPTION

REVISIONS

REGISTERED PROFESSIONAL ENGINEER
BRUCE D. MATTERN
NO. C19388
EXP. 09/30/01
CIVIL
STATE OF CALIFORNIA

BDMattern 5/30/01
PROJECT ENGINEER DATE

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS

SIERRA MADRE BLVD., ET AL

NEW YORK DR. - 225' W/O ALTADENA DR.
TO 850' E/O ALTADENA DR.

TITLE SHEET, TYPICAL SECTIONS, AND TABLES

PCA NO. X2509022 | PROJECT ID NO. RDC0012976 | SHEET 9 OF 9

TS-OF 5/99

\\MP130200\CADD\HYD\111125M.dgn 05/29/2001 11:12:44 AM