## ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM O.M.B. No. 3067-0077 Expires July 31, 1999

ATTENTION: Use of this certificate does not provide a waiver of the flood instance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Ameridment or Revision (LOMA or LCMR), You are not required to respond to this collection of information unless a valid OMB control number is deplayed in the upper right corner of this form. Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
	POUCYNUMBER
STREET ADDRESS (Including Ace, Line, Subjurder Bdg, Number) OR P.O. ROUTE AND BOX HEADER 30050 Anjik ST. Castar C 91384	COMPANY NAIC HUMBER
OTLES DESCRIPTION if at and Short Musican at a	سيدي والمربوبية الاختذائقي وكالمتحصية المعبستين المكاجزة عدد

STATE  $\alpha$ 7129 SECTION B FLOOD INSURANCE RATE HAP (FIRM) INFORMATION Provide the following from the proper FIRM (See instructions): · LOCHALNITY NUMBER 2. MINEL NUMBER & SUFFIX 4. DATE OF FIRM INDEX L FFM 20NE S. BASE FLOCO ELEVATION 3 4 R 15-85 034  $\odot$ 7. Indicate the elevation datum system used on the FIRM for Base Rood Elevations (BFE): SINGVD 29 🗌 Other (describe on bedd) 8. For Zones A or V, where no BFE is provided on the FIRM, and the community has established a BFE for this building site, indicate the community's BFE: 1/1/1719. 1/1 feet NGVD (or other FIFIM datum-see Section B, Item 7) SECTION C BUILDING ELEVATION INFORMATION 1. Using the Elevation Certificate instructions, Indicate the clagram number from the diagrams found on Pages 5 and 6 that best describes the subject building's reference level 2(a). FIRM Zones A1-A30, AE, AH, and A (with BFE). The top of the reference level floor from the selected diagram is at an elevation of LILISIII. 12 feet NGVD (or other FIRM datum-see Section B, hem 7). (b). FIRM Zones V1-V30, VE, and V (with BFE). The bottom of the lowest horizontal structural member of the reference level from the selected diagram, is at an elevation of LLLL i feet NGVD (or other FIRM datum-see Section 8, Item 7). (c). FIRM Zone A (without BFE). The floor used as the reference level from the selected diagram is LLI.L feet above ... or below (check one) the highest grade adjacent to the building. (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is LLL. I feet above I or below I (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? 🔲 Yes 🛄 No 🛄 Unknown 3. Indicate the elevation datum system used in determining the above reference level elevations: 🛛 NGVD 29 🗌 Other (describe uncer Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, item 7], then conven the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.) 

4. Elevation reference mark used appears on FIRM: U Yes X No (See Instructions on Page 4)

5. The reference level elevation is based on: 🖉 actual construction 🗌 construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)

6. The elevation of the lowest grade immediately adjacent to the building is: 1/1/1/15/01.121 test NGVD (or other FIRM datum-see Section B, Item 7).

SECTION D COMMUNITY INFORMATION

1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C, Item 1 is not the "towest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "towest floor" as defined by the ordinance is: LILLL level NGVD (crupther FJRM datum-see Section B, Item 7).

2. Dete of the start of construction or substantial improvement \_\_\_\_\_\_\_ / / 5 [96\_\_\_\_\_

FEMA Form 81-31, MAR 97 REPLACES ALL REMOUS EDITIONS

SEE REVERSE SIDE FOR CONTINUATION


This carufication is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to cartify elevation information when the elevation information for Zones A1-A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the cartification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the cartification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features-N the certifier is unable to certify to breakeway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then let the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the deter available. I understand that any faise statement may be purishable by fine or imprisonment under 18 U.S. Code, Section 1001.

CENTRER'S NAME LICENSE NULBER (or Alt See) R, Meu 26200 me COMPANY NAME leuver Dre. ZIP ACCRESS STATE: cm 8790 ía, e B uena SIGNATURE 011 6 - 1 114/994 4789 -97 11

Copies should be made of this Cartilicate for: 1) community official, 2) insurance agent/company, and 3) building owner.

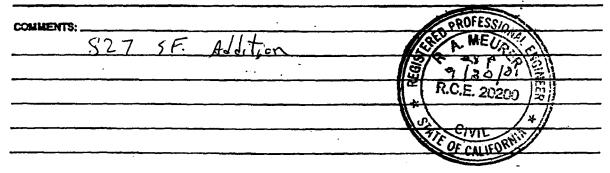

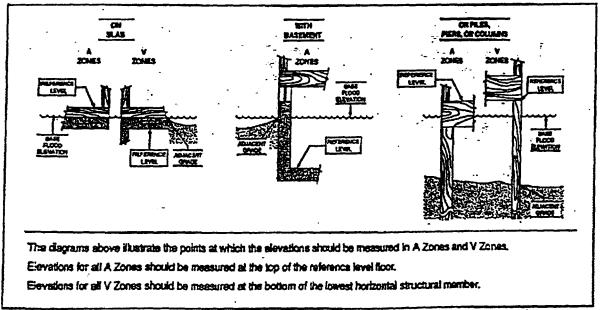

Page 2

## ELEVATION CERTIFICATE FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this carificate does not provide a waiver of the flood insurance purchase requirement. This form is used on provide elevation information necessary to ensure compliance with applicable community floodolain management ordinances. to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY L
BUILDING OWNER'S NAME	POLICY MUMBER
STREET ADDRESS (Incrucing Act. Line, Suns andror Blog. Number) OR P.O. ROLITE AND BOX MEMARER 20050 An VIK St., Castaic, Ca.	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers. alc.)	<u></u>
CITY STATE Ca.	2P CODE
SECTION B FLOOD INSURANCE RATE MAP (FIRM) INFORMATION	
Provide the following from the proper FIRM (See Instructions):	
1. COMMUNITY NUMBER 2. PANEL NUMBER 2. SUFFIX 4 DATE OF FRAM INCEX 5. FIRM 2CNE 065043 0340 B 11/15/85 A	6. BASE FLOCD ELEVATION IN AC ZONN, USE COOT
<ol> <li>Indicate the elevation datum system used on the FIRM for Base Flood Elevations (BFE):</li></ol>	Cher (describe on b in this cuilding site, including
SECTION C BUILDING ELEVATION INFORMATION	
<ul> <li>describes the subject building's reference level /</li></ul>	of the reference level from ction B, Item 7). 
5. The reference level elevation is based on: A actual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level it case this certificate will only be valid for the building during the course of construction. A post-construction will be required once construction is complete.)	on Elevation Certificate
<ol> <li>The elevation of the lowest grade immediately adjacent to the building is: i.eet NGVD (c Section B. Item 7).</li> </ol>	r other FIRM datum-see
SECTION D COMMUNITY INFORMATION	
1. If the community official responsible for verifying building "evations specifies that the reference level indition is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of floor" as defined by the ordinance is: floor" as defined by the ordinance is: floor" as defined by the ordinance is:	the building's "lowest

2. Date of the start of construction or substantial improvement

This certification is to be signed by a land surveyor, engineer, or architect who is authonzed by state or local law to certify elevintermation when the elevation information for Zones A1-A30, AE, AH, A (with BFE), V1-V30, VE, and V (with BFE) is required Community officials who are authonzed by local law or ordinance to provide floodplain management information, may also sig certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-II the certifier is unable to certify to breakaway/non-breakaway enclosure size. location of servicing equipment, area use, wall openings, or unfinished area. Feature(s), then list the Feature(s included in the certification uncer Comments below. The diagram number, Section C, Item 1, must still be entered.

I centify that the information in Sections B and C on this centificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code. Section 1001.

200 rer CEE S NAME ina CHIPANY NAME STATE COR SIGNATURE

Copies should be made of this Certificate for: 1) community official. 2) Insurance agent/company, and 3) building owr

COMMENTS: The new floor elevation same as existing is the ROFESS The hydrology study prepared by our office and approved by your division on June 13, 1996 to determine a required finished floor elevation for improvement of the residence located at 30050 Anvik Street, Castaic indicated that the 30 2 existing floor elevation is adequate. 4 Elevations were based on the Los Angeles County Department of Public Work Romero Canyon Floodway May No. 388-MLT. CIV The applicable water surface elevation is 1479.1 and the existing floor elevation is 1481.3. ۰. 1007714 ONPLEL ON PREASE OR COLUMN BASEMENT الملك ٨ ZONES ZONES ZONES ZONES ZONES REFERENCE LEVEL REFERENC VENCE UNTL LEYES nou ELEYARD. NUTPER RC ELEVAT LIVEL GRIDE FLEVATED LEYEL

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.