COUNTY OF LOS ANGELES
DEPARTMENT OF PUBLIC WORKS

OLYMPIC BOULEVARD AT TELEGRAPH ROAD

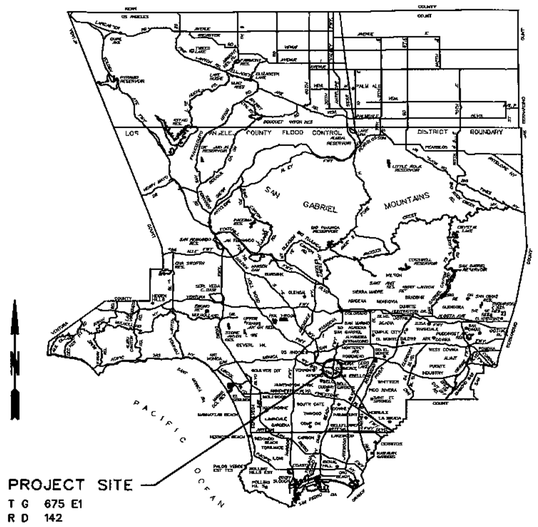

LOCATION MAP

CONSTRUCTION NOTES

1. PRIME CONTRACTOR LICENSE REQUIRED CLASS A OR C8
2. STANDARD PLANS REFERENCED ARE PER THE STANDARD PLANS FOR PUBLIC WORKS CONSTRUCTION (SPPWC) UNLESS OTHERWISE NOTED
3. ELEVATIONS SHOWN ARE IN FEET BASED ON RIVERA QUAD 2005 ADJUSTMENT, NAVD 1988 DATUM
4. WITHIN THE PROJECT LIMITS, THE CONTRACTOR SHALL INSTALL A BLUE RAISED RETROREFLECTIVE PAVEMENT MARKER (RPM) ON THE FINISHED SURFACE AT EACH FIRE HYDRANT LOCATION PER CALIFORNIA 2014 MUTCD PART 3, FIGURE 3B-102(CA), AS DESCRIBED IN THE SPECIAL PROVISIONS

CONSTRUCTION LEGEND

1. PORTLAND CEMENT CONCRETE CURB AND GUTTER (ON 6" CMB)
2. PORTLAND CEMENT CONCRETE CURB
5. PORTLAND CEMENT CONCRETE SIDEWALK, 4" THICK
6. BRIDGE DECK REMOVAL, VARIABLE THICKNESS
7. PORTLAND CEMENT CONCRETE PAVEMENT, VARIABLE THICKNESS (CLASS 520-C-2500)
8. ASPHALT CONCRETE PAVEMENT
9. ASPHALT CONCRETE PAVEMENT ON BASE MATERIAL
20. CURB RAMP (ON 6" CMB) PER CALTRANS STD PLAN A88A, T=4" AND CASE B UNLESS OTHERWISE NOTED
21. ISLAND PASSAGEWAY (ON 6" CMB) PER CALTRANS STD PLAN A88B, T=6"
22. TRENCH BACKFILL SLURRY (CLASS 270-E-500)
23. ROUGHEN EXISTING CONCRETE SURFACE TO 1/4" AMPLITUDE
24. MODIFIED PORTLAND CEMENT CONCRETE PAVEMENT, VARIABLE THICKNESS (SEE SECTION 313-1 OF THE SPECIAL PROVISIONS)
25. PORTLAND CEMENT CONCRETE PAVEMENT, VARIABLE THICKNESS (CLASS 560-C-3250)
26. DETECTABLE WARNING SURFACE PER CALTRANS STD PLAN A88A

STANDARD PLANS

SPPWC, 2012 EDITION

101-2 ABOVE-GROUND UTILITIES LOCATION IN PARKWAY
112-2 CURB AND SIDEWALK JOINTS
120-2 CURB AND GUTTER - BARRIER

STATE OF CALIFORNIA, 2015 EDITION

A88A CURB RAMP DETAILS
A88B CURB RAMP AND ISLAND PASSAGEWAY DETAILS

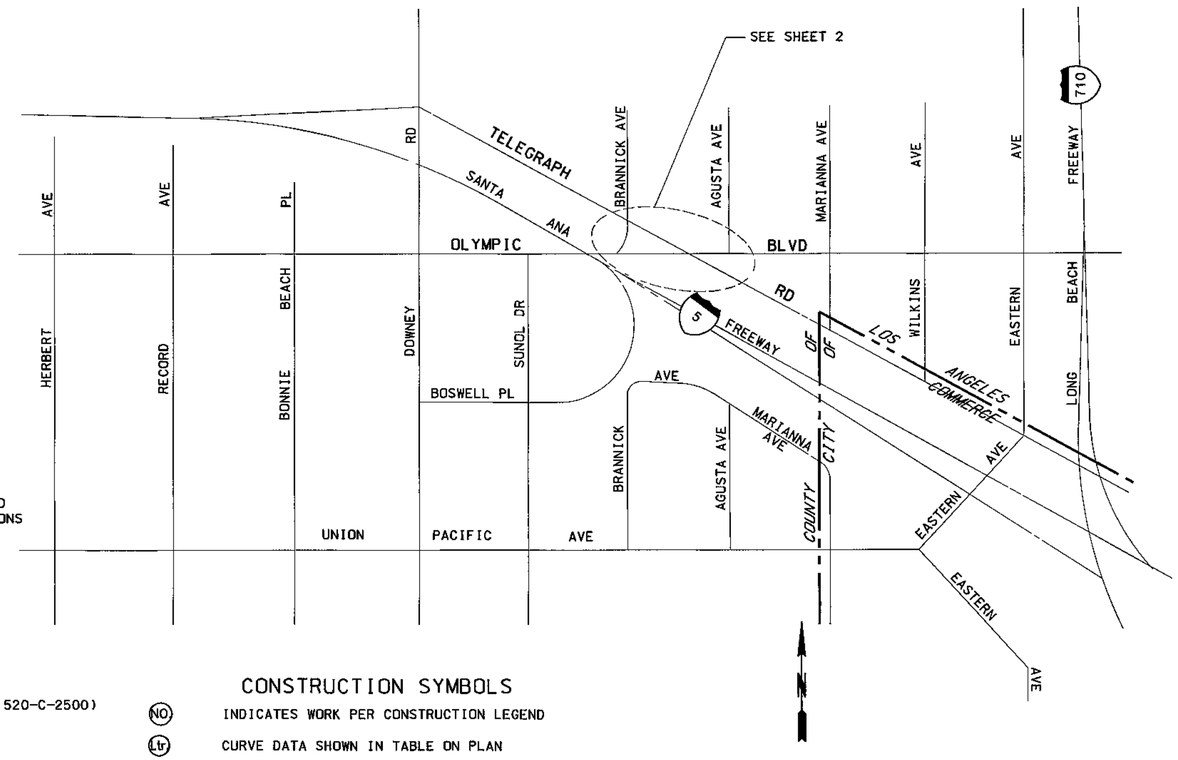

KEY MAP

NO SCALE

CONSTRUCTION SYMBOLS

(NO) INDICATES WORK PER CONSTRUCTION LEGEND

(Ltr) CURVE DATA SHOWN IN TABLE ON PLAN

2" P4 ABOVE LINE — INDICATES THE TYPE OF STANDARD, THICKNESS OF SURFACE MATERIAL IN INCHES, STD PLAN VARIABLES, OR CURB RAMP CASE

6" CMB BELOW LINE* — REFERENCE TO DETAIL, THICKNESS OF BASE MATERIAL IN INCHES, OR TREE WELL CASE

(5) a x b / 6" CMB ABOVE LINE — a = LENGTH PARALLEL TO CURB, b = LENGTH PERPENDICULAR TO CURB

RU UTILITY TO BE RELOCATED BY OWNER

AU UTILITY TO BE ADJUSTED VERTICALLY BY OWNER

REFERENCES

1. FINAL MATERIALS TEST REPORT, LAB No 37378 (DATED JUNE 13, 2016)
2. PWFB 1123, PAGES 3266, 3280-3282

INDEX OF SHEETS

SHEET NO 1	TITLE SHEET
SHEET NO 2	PLAN
SHEET NO 3	CONSTRUCTION DETAILS
SHEET NO 4	TYPICAL SECTIONS
SHEET NO 5	BRIDGE DECK MODIFICATIONS
PLAN SP	SIGNING & STRIPING PLAN
PLAN TC	TRAFFIC CONTROL PLANS
PLAN TS	TRAFFIC SIGNAL PLAN

NON-STANDARD ABBREVIATIONS

AC	ASPHALT CONCRETE
BC	BEGINNING OF CURVE
BCR	BEGINNING OF CURB RETURN
C&G	CURB AND GUTTER
CALTRANS	STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION
CB	CATCH BASIN
CF	CURB FACE
CL	CENTERLINE, CLEARANCE
CLF	CHAIN LINK FENCE
CONC	CONCRETE
CR	CURB RAMP
DMH	DRAINAGE MANHOLE
E	EAST
EC	END OF CURVE
ECR	END OF CURB RETURN
EG	EDGE OF GUTTER
ELEV	ELEVATION
EX, EXST	EXISTING
FH	FIRE HYDRANT
FL	FLOWLINE
FS	FINISHED SURFACE
INT	INTERSECTION
JT	JOINT
LT	LEFT
MOD	MODIFIED
MR	MOVEMENT RATING
MTL	MATERIAL
N	NORTH
OC	ON CENTER
PB	PULL BOX
PCC	POINT OF COMPOUND CURVE
POC	POINT ON CURVE
PRC	POINT OF REVERSE CURVE
PVMT	PAVEMENT
PWFB	PUBLIC WORKS FIELD BOOK
R	RADIUS
RT	RIGHT
R/W	RIGHT OF WAY
SDMH	SANITATION DISTRICT MANHOLE
SHT	SHEET
STD	STANDARD
SW	SIDEWALK
TBS	TRENCH BACKFILL SLURRY
TC	TOP OF CURB
TS	TRAFFIC SIGNAL
TYP	TYPICAL
VAR	VARIABLE, VARIES

AC PAVEMENT CLASS AND GRADE LEGEND

P1 C2-PG 64-10
B-PG 64-10
P2 C2-PG 64-10
P3 B-PG 64-10
P4 D2-PG 64-10

PH084599

CADD PROJECT FILE NAME RDC0015896-PLAN_RD_OT DGN
CHECKER D RADLE
DESIGNER S JONG
DRAFTER S JONG

PROPOSED FOR CONSTRUCTION: DATE ADVERTISED: DATE AS BUILT: DATE

Know what's below. Call 811 before you dig.

APPROVED CAL FARSER DIRECTOR OF PUBLIC WORKS
BY DEPUTY DIRECTOR DATE 2/4/16
RECOMMENDED BY ASSISTANT DEPUTY DIRECTOR DATE 2/4/16
SUBMITTED BY HIGHWAY DESIGN SECTION 1 DATE 2/4/16

DATE	MK	DESCRIPTION

REVISIONS

REGISTERED PROFESSIONAL ENGINEER SHARIE JONG No 56647 CIVIL STATE OF CALIFORNIA
PROJECT ENGINEER DATE 2-4-16

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS

OLYMPIC BOULEVARD AT TELEGRAPH ROAD

TITLE SHEET

PROJECT ID NO. RDC0015896

PCA X210001004 | DWG | SHEET 1 OF 5

PLAN RD