O.M.B. No 3067-00. Expires May 31, 191

ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). Instructions for completing this form can be found on the following pages.

SECTION A PROPERTY INFORMATION	FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME	POLICY NUMBER
STREET ADDRESS (Including Apt., Unit. Suite and/or Bldg. Number) OR P.O. ROUTE AND BOX NUMBER 47205 N. 6025 Stvert E	COMPANY NAIC NUMBER
OTHER DESCRIPTION (Lot and Block Numbers, etc.)	

Lancaster				STATE CA	ZIP CODE 93535
	SECTION B FI	OOD INSURA	ANCE RATE MAP (FIRM)		
Provide the following from t	he proper FIRM (See	Instructions):			
1. COMMUNITY NUMBER 065043	2. PANEL NUMBER 0115	3. SUFFIX	4. DATE OF FIRM INDEX ASII-12-85 72-2-00	5. FIRM ZONE	8. BASE FLOOD ELEVATION (in AO Zones, use depuh) Man-e. Skown
8. For Zones A or V, where	no BFE is provided o	n the FIRM, ar	ase Flood Elevations (BFE nd the community has esta r FIRM datum-see Section	blished a BFE fo	
	SECTIO	ON C BUILD	ING ELEVATION INFORM	ATION	
of 2347.246 (b). FIRM Zones V1-V30, the selected diagram,	Ilding's reference leve AE, AH, and A (with E et NGVD (or other FIF VE, and V (with BFE) is at an elevation of BFE). The floor used	BFE). The top BFE). The top IM datum-see . The bottom d as the refere	of the reference level floor Section B, Item 7). of the lowest horizontal stri feet NGVD (or other FIRI nce level from the selected	from the selecte uctural member c M datum-see Se	d diagram is at an elevation of the reference level from ction B, Item 7).

- (d). FIRM Zone AO. The floor used as the reference level from the selected diagram is LL. L feet above c or below (check one) the highest grade adjacent to the building. If no flood depth number is available, is the building's lowest floor (reference level) elevated in accordance with the community's floodplain management ordinance? Yes No Linknown
- 5. Indicate the elevation datum system used in determining the above reference level elevations: X NGVD '29 C Other (describe under Comments on Page 2). (NOTE: If the elevation datum used in measuring the elevations is different than that used on the FIRM [see Section B, Item 7], then convert the elevations to the datum system used on the FIRM and show the conversion equation under Comments on Page 2.)

. Elevation reference mark used appears on FIRM; See No. (See Instructions on Page 4)

- Solution is based on: A ctual construction construction drawings (NOTE: Use of construction drawings is only valid if the building does not yet have the reference level floor in place, in which case this certificate will only be valid for the building during the course of construction. A post-construction Elevation Certificate will be required once construction is complete.)
- 3. The elevation of the lowest grade immediately adjacent to the building is: 2349 20 feet NGVD (or other FIRM datum-see Section 8, Item 7).

SECTION D COMMUNITY INFORMATION

1. If the community official responsible for verifying building elevations specifies that the reference level indicated in Section C. Item 1 is not the "lowest floor" as defined in the community's floodplain management ordinance, the elevation of the building's "lowest floor" as defined by the ordinance is:

2. Date of the start of construction or substantial improvement _____APRIL 96_____

SECTION E CERTIFICATION

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation informatic n when the elevation information for Zones A1-A30, AE, AH, A (with BFE),V1-V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's rapresentative may also sign the certification.


Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

55976 Larry V110 CERTIFIER S NAME LICENSE NUMBER (or Affix Seal) Urvey TITLE COMPANY NAME 50 10 ADDRESS CIT 5 SIGNATUR

Copies should be made of this Certificate for: 1) community official, 2) insurance agent/company, and 3) building owner.

Des ハイハ 3268 A CA RA COMMENTS:

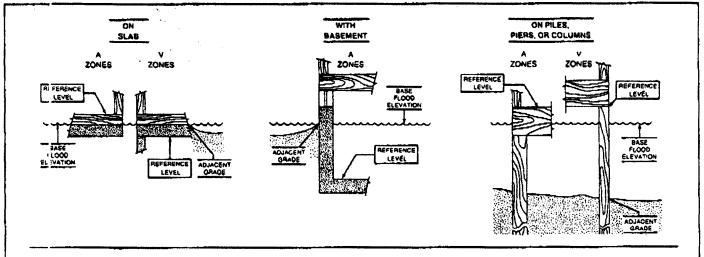

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.