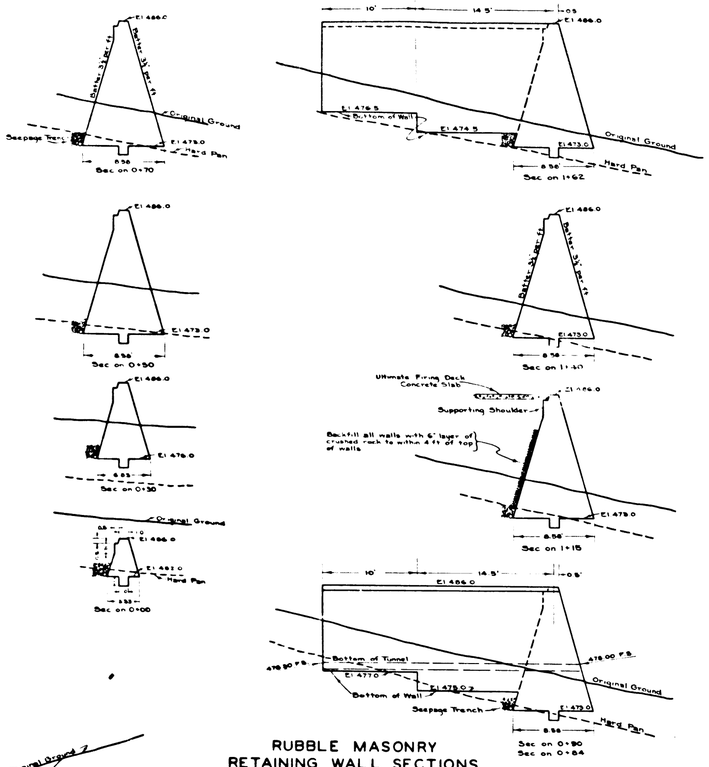

RUBBLE MASONRY
RETAINING WALL SECTIONS
SCALE: 1 IN. = 5 FT.



TUNNEL ROOF SLAB
REINFORCED CONCRETE
SCALE: 1 IN. = 1 FT.



TUNNEL FLOOR
SCALE: 1 IN. = 1 FT.

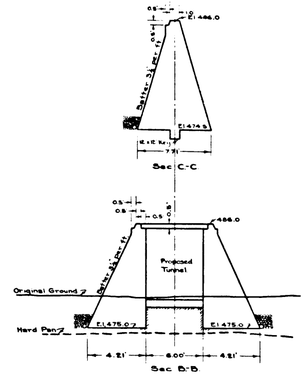

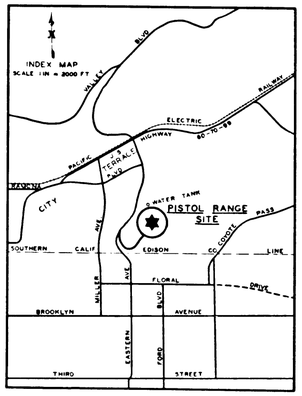

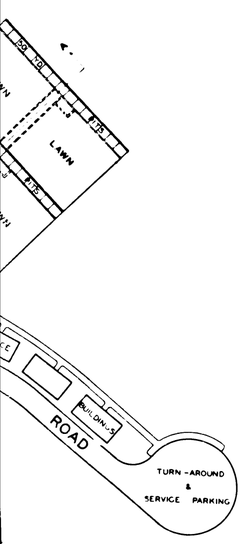

SPECIFICATIONS

Rubble masonry shall be constructed in the form and to the dimensions shown on the plans. The stones shall be hard, durable, preferably broken rock with rough surfaces. They shall be clean and laid in Class "B" Concrete. They shall be wet before coming into contact with the concrete.

Concrete shall be proportioned, machine mixed and placed in accordance with General Specifications on file in the office of the County Engineer.

The seepage trench and 6" layer of pervious backfill behind walls shall consist of crushed rock or gravel.

Open joints in the drain tile shall be covered with a broken piece of tile before spreading crushed rock over them.

QUANTITIES

Rubble Masonry	370 Cu. Yds.
Crushed Rock Backfill	22 Cu. Yds.
Gravel for Seepage Trench	22 Cu. Yds.
Reinforced Concrete	32 Cu. Yds.
Reinforcing Steel	2971 lbs.
4" Drainage Tile	184 lin. ft.
4" Steel or Iron Pipe	22 lin. ft.

SHERIFF'S PISTOL RANGE
IN
CITY TERRACE
COUNTY OF LOS ANGELES, CALIFORNIA
PLANS FOR
FIRING DECK RETAINING WALLS

COUNTY SURVEYORS MAP № B-1730
SCALES AS SHOWN

JOB NUMBER 8320

ALFRED JONES—COUNTY SURVEYOR AND COUNTY ENGINEER
PLANS PREPARED OCTOBER—NOVEMBER 1941

PLANS PREPARED AND SURVEYS MADE UNDER INSTRUCTIONS OF THE BOARD OF SUPERVISORS PER ORDER DATED SEPTEMBER 30, 1941, AND UPON REQUEST OF THE CHIEF ADMINISTRATIVE OFFICER BY LETTER DATED MAY 12, 1941.

PLANE TABLE SURVEY & F. B. 877: 128-133

FIELD WORK BY..... T. M. WALSH
F. J. McNEAL
DESIGNED BY..... E. J. EPPERSON
L. K. FREEMAN
TRACED BY..... J. A. LYON
CHECKED BY..... L. K. FREEMAN
J. H. SMITH

THIS DRAWING AND THE DATA HEREON ARE HEREBY MADE A PART OF THE SPECIFICATIONS.

SUBMITTED BY [signature] CHIEF DEPUTY APPROVED BY [signature] COUNTY ENGINEER

FOR ORIGINAL TOPOGRAPHY SEE C. S. B-1707
FOR GRADING PLAN AND CALCULATION MAP SEE C. S. B-1723

CSB-1730
A1 OF A2

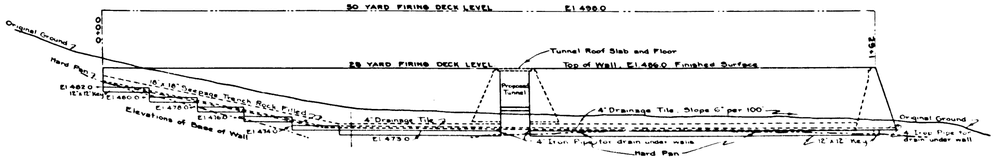

FRONT ELEVATION OF RETAINING WALL
SCALE: 1 IN. = 10 FT.

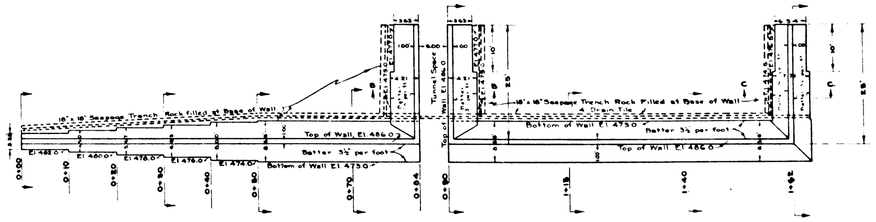

PLAN OF RETAINING WALL
SCALE: 1 IN. = 10 FT.

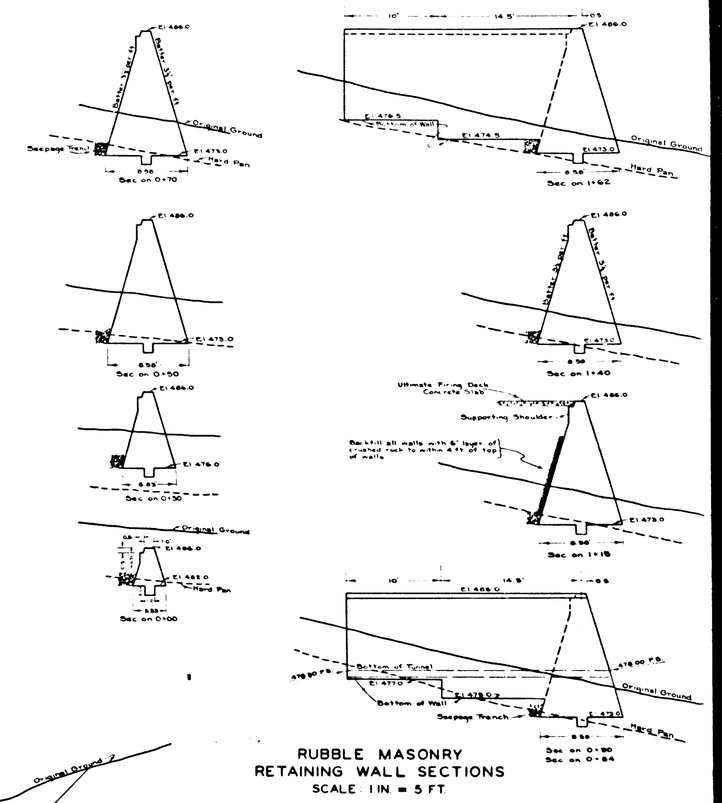

RUBBLE MASONRY
RETAINING WALL SECTIONS
SCALE: 1 IN. = 5 FT.

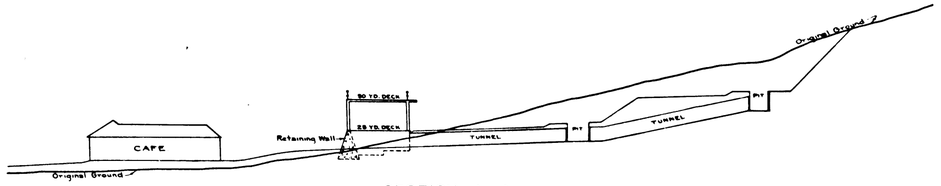

SECTION A-A
SCALE: 1 IN. = 20 FT.

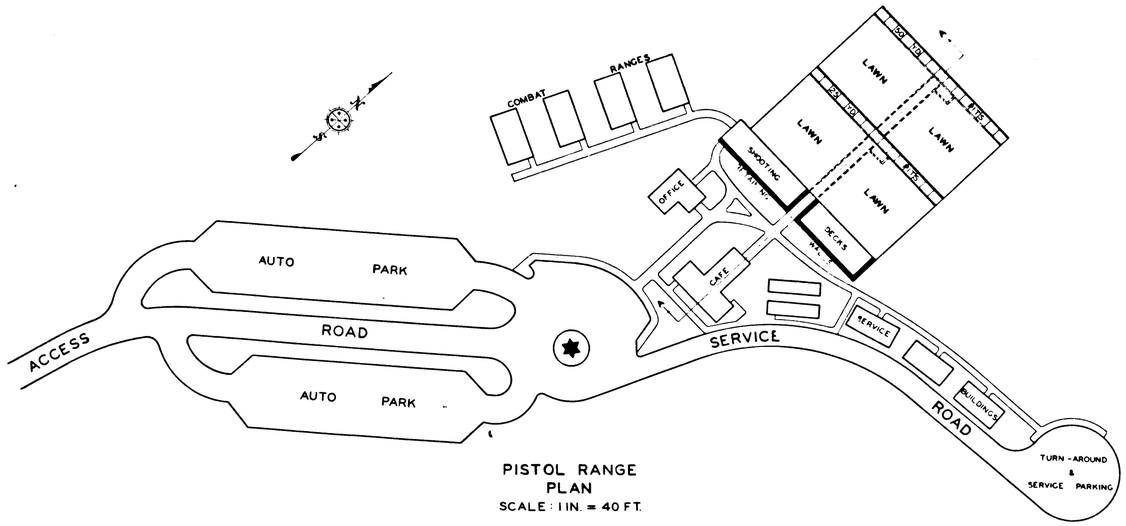

PISTOL RANGE
PLAN
SCALE: 1 IN. = 40 FT.

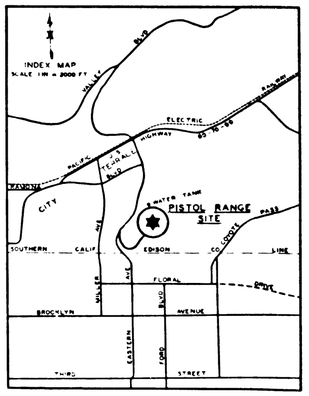

CSB-1730
A2 OF A2