

Traffic and Lighting Division

Traffic Signal Plan Drafting Guide

Version 2.0

June 2012

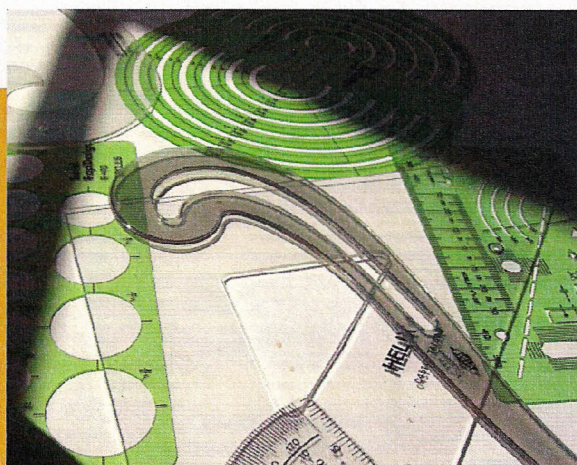


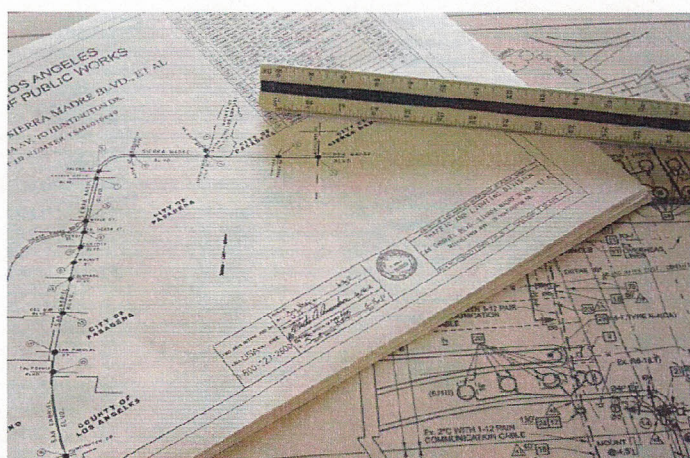


TABLE OF CONTENTS

	Page
Introduction	1
 1.0 DRAFTING PRACTICES	
1.1 Line Styles & Lettering Types	1
1.2 Symbols	2
1.3 Dimensions & Leader Lines	2
1.4 Sample Plan Sheet	3
 2.0 PLAN LAYOUT	
2.1 Base Plan	4
2.1.1 Plan Sheet	4
2.1.2 Scale	4
2.1.3 North Arrow	4
2.1.4 Intersection Orientation	5
2.1.5 Title Block	5
2.1.6 Signature Block	6
2.1.7 Engineer's Stamp	6
2.1.8 City Signature Block	6
2.1.9 State Signature Block	6
2.1.10 Extraordinary Maintenance/Force Account Revision Blocks	7
2.1.11 Plan Revision Block	7
2.1.12 Jurisdictional Percentiles	7
2.1.13 Phase Diagrams	8
2.1.14 Pole Schedule	8
2.1.15 Pole Location Detail	9
2.1.16 Miscellaneous Details	10
2.1.17 Signal Operational Notes	10
2.1.18 Construction Notes	10
2.1.19 General Notes	11
2.1.20 Thomas Guide Map Page	11
2.1.21 Traffic Signal (T.S.) Revision Number	11
2.2 Existing Topography	11
2.2.1 Symbols	11
2.2.2 Signal & Lighting Equipment	12
2.2.3 Conduit & Pull Boxes	12
2.2.4 Signing, Striping, & Markings	12
2.2.5 Near Surface Structures	13
2.2.6 Underground Utilities	13
2.2.7 Sidewalk & Driveways	13

2.2.8	Crosswalks.....	13
2.2.9	Trees.....	13
2.2.10	Signal Service.....	14
2.2.11	Right-of-Way Lines and Jurisdictional Boundary Lines.....	14

3.0 FIELD CHECK

3.1	Roadway Parameters.....	14
3.1.1	Roadway Geometry.....	14
3.1.2	Striping & Pavement and Curb Markings.....	14
3.1.3	Signs & Posted Speeds.....	15
3.2	Signal & Lighting Equipment.....	15
3.2.1	Signal Vehicle Heads.....	15
3.2.2	Pedestrian Heads.....	15
3.2.3	Standards.....	15
3.2.4	Pull-Boxes.....	15
3.2.5	Conduit.....	15
3.2.6	Pedestrian Push Buttons.....	15
3.2.7	Street Name Signs.....	16
3.2.8	Controller Cabinet & Controller Type.....	16
3.2.9	Detection.....	16
3.2.10	Street Lighting.....	16
3.3	Drainage.....	16
3.4	Utilities.....	16
3.5	Service.....	16
3.6	Miscellaneous.....	17

4.0 RIGHT-OF-WAY REQUIREMENTS

4.0	Right of Way Requirements.....	17
-----	--------------------------------	----

5.0 REFERENCE MATERIAL

5.0	Reference Material.....	See Appendix
	Appendix A – Striping & Utility Line Styles	
	Appendix B – Symbols	
	Appendix C – Typical Construction Notes	
	Appendix D – Typical General Notes	
	Appendix E – Sample Plans	
	Appendix F – Photo Locations	
	Appendix G – Signature Blocks	
	Appendix H – Sample Pole Schedule	

The following CADD drafting standards outline the general practices that shall be used in preparing Traffic Signal Plans for the Los Angeles County Department of Public Works. The purpose of the standards is to promote uniformity in the preparation and drafting of these drawings. These standards are not intended to be a source for design considerations. Sample plans will be utilized as a reference for description purposes and acceptable quality of plan work is illustrated by the samples. All plans must be prepared using MicroStation version v8i or higher.

1.0 DRAFTING PRACTICES

1.1 Line Styles and Lettering Types

Line Styles: Appendix A shows the recommended line styles, colors, and weights to be used.

- All existing equipment, signing, striping and markings shall be shown dashed.
- All proposed equipment, signing, striping, and markings shall be shown solid.

Lettering: Table 1 shows the recommended text format to be used for each text type.

- Use upper case lettering for all instructions to the contractor.
- Information or notes not pertaining to work by contractor shall be in lower case lettering.
- Lettering shall be oriented on the plan in such a manner to be readable from the lower right corner.
- Line Spacing should be, unless otherwise noted, at least half of the height of the text that is being inserted.

Table-1

TYPE OF TEXT	HEIGHT	WIDTH	FONT	SLANT	COLOR	WEIGHT	LEVEL
General Notes	0.1	0.1	Arial-151	0	2	2	55
Construction Notes	0.1	0.1	Arial-151	0	2	2	55
Street Names	0.25	0.25	Arial-151	0	6	4	11
Call Outs	0.1	0.175	Arial-151	0	2	2	55
City Boundaries	0.175	0.175	Arial-151	20	4	3	10

NOTE: All height and width values are given as a scale factor. Multiply the value by the desired scale to calculate actual height.

1.2 Symbols: Appendix B shows the recommended standard symbols to be used.

- All existing signal equipment shall be shown as a thin, (weight = 1), dashed line.
- All proposed signal equipment shall be shown as a thick, (weight = 3), solid line.

1.3 Dimensions & Leader Lines

Dimensions: Straight lines shall be used for dimensions and shall be referenced to fixed points (i.e., BCR's, curbs, etc.). Do not reference dimensions to any objects that can be removed or relocated. Dimensions and text shall be oriented on the plan in such a manner to be readable from the lower right corner.

Table-2 shows the typical items that require dimensions and how they should be dimensioned:


Table-2

Item	Dimension Reference Point
Street Widths	Street Centerlines / Curb Face / Edge of Pavement
R/W Widths	Street Centerlines / Curb Face / Edge of Pavement
Loop Locations	BCR / ECR / Curb Face / Edge of Pavement
*Equipment Locations	BCR / ECR / Curb Face / Edge of Pavement
Lane Lines	Curb Face / Edge of Pavement / Street Center Line / Along Lane Lines
Curb Markings (i.e. Red Curb)	BCR / ECR, Along Curb


*Typically, pole locations are indicated in the pole schedule.

Leader Lines: Leader Lines shall be used to reference a notation or construction note to an object or item on the plan. Avoid crossing leader lines with dimension lines and other leader lines.

Curved leader lines: Curved leader lines can be used to call out more than one item at once. Use a straight-line bracket for notes with two or more lines.



3-point leader lines: A 3-point leader line can be used in conjunction with a construction note call out box.



Call out boxes: Call out boxes shall be 6 X 6 on a 20 scale and have a number that references a Construction Note.

- 1.4 Sample Plan Sheet:** Appendix E shows Sample Plans that will be used as a reference in the layout of a traffic signal plan and signing and striping plan throughout this manual.

2.0 PLAN LAYOUT

Before drafting is started on a traffic signal plan, it is necessary to make a preliminary evaluation of the arrangement of the intersection. The process of plan layout can best be described in the outline as shown in this section. All of the elements should be considered while preparing a plan. The sample plan provided in Appendix E will show each item and their recommended locations. An electronic copy of each of the items can be obtained from the County.

2.1 Base Plan

2.1.1 Plan Sheet

All plans and traffic signal modification drawings shall be prepared on a 2 feet by 3 feet size sheet with minimum of 1" margin (See Appendix E- Sample Plans).


2.1.2 Scale

All traffic signal plans shall be drawn at a scale of 1" = 20'.

All traffic signal modification drawings shall be drawn proportionally, but may also be drawn at a scale of 1" = 20'.

2.1.3 North Arrow

The North arrow should be placed in the upper left-hand corner of the plan and to the right of the Signal Phase Diagram. The north arrow shall point either straight up or towards the left.

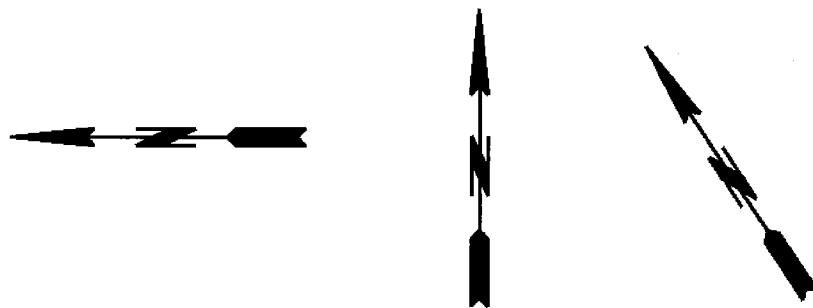

2.1.4 Intersection Orientation

The intersection should be centered on the plan sheet. Streets should be oriented on the plan in such a manner as to cause the north arrow to point up or towards the left. The major or main street should be placed horizontal on the sheet.

Show street center lines, street names, County-City boundaries, curb line (or edge of pavement if no curb is existing or proposed), Right-of-Way lines, BCR, ECR, and existing/proposed access ramps. Cross gutters and local depressions shall be shown only if necessary to justify proposed design, especially in placement of detector loops.

2.1.5 Title Block

Title Block shall be placed in the bottom right corner of plan. The Title Block should include all information as seen in Figure 2.1.A.

Figure 2.1.A

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS TRAFFIC AND LIGHTING DIVISION			
TRAFFIC SIGNAL PLAN ARTERIAL STREET AT MINOR STREET			
I/S X OF X	SHT X OF X	SCALE: 1" = 20'	T.S. XXXX

2.1.6 Signature Block

The Signature Block shall be placed directly to the left of the Title Block as illustrated on the sample plans in Appendix E. The Signature Block should be in a format as shown in Appendix G. For plans prepared by a consultant, the consultant shall also include their own signature block on the plan.

2.1.7 Engineer's Stamp

The Engineer's Stamp should be placed to the left of the Signature Block as illustrated on the sample plan in Appendix E. For plans prepared by a consultant, the consultant shall also include their stamp on the plan.

2.1.8 City Signature Block

The City Signature Block should be placed directly below the Signature Block. The City Signature Block shall contain all of the information as shown in Figure 2.1.B.

Figure 2.1.B

APPROVED: CITY OF XYZ	
BY: _____	DATE: _____

Provide one signature block for each city having jurisdiction over the intersection.

2.1.9 State Signature Block

The State Signature Block should be placed to the right of designer's name block at lower left corner. The State Signature Block should consist of all the information as seen in Figure 2.1.C.

Figure 2.1.C

CALTRANS-TRAFFIC			
REVIEWED BY	REVIEWED BY	REVIEWED BY	DATE

2.1.10 Extraordinary Maintenance/Force Account Revision Blocks

The EOM/FA signature block should be placed above the Title Block. See Appendix G, Modification to an Existing Traffic Signal Plan, *Extraordinary Maintenance* and *Force Account* revision blocks, for the signature blocks that should be used.

2.1.11 Plan Revision Block

The Plan Revision Block should be placed at the bottom left corner of the plan, at a 90 degree angle to the border of the plan as illustrated on the sample plan in Appendix E. The block should consist of all the information as seen in Figure 2.1.D.

Figure 2.1.D

REVIEWED BY	SUPERVISED BY	SPOTTED	DRAWN	#	PROJECT	CAD FILE NAME	DATE	BY	REVISIONS

2.1.12 Jurisdictional Percentiles: Indicates the percentile of the City's jurisdiction at an intersection.


Jurisdictional percentiles shall be placed above the Signature Block as illustrated on the sample plans in Appendix E.

2.1.13 Phase Diagrams: Phase diagrams shall indicate the existing and proposed operation of the traffic signal at the intersection.

The Phase Diagrams should be drawn as shown in figure 2.1.E. The phase diagrams should be placed at the upper left-hand corner of the plan and shall be labeled as either Existing or Proposed. If a change in operation is recommended, both the existing and proposed phase diagrams should be shown. Pedestrian movements shall be indicated with a dashed line. Vehicle movements shall be indicated with a solid line with an arrow showing the direction of the movement.

Figure 2.1.E

EXISTING SIGNAL PHASE DIAGRAM

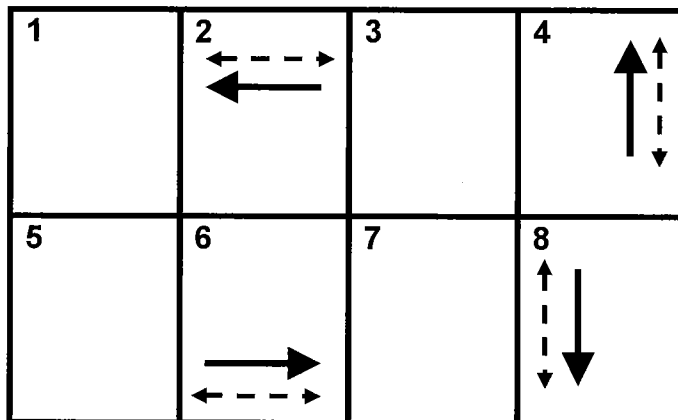

2.1.14 Pole Schedule: The Pole Schedule shows the inventory of the poles and pole equipment being used at an intersection. Each item shall be labeled whether it is Existing (E), New (N), or Relocated (R). When there is a majority of one type of equipment (Existing, New, or Relocated), the following can be written below the pole schedule instead of labeling each item: "All equipment is *existing* unless otherwise noted."

All abbreviations or symbols used in the pole schedule shall be identified below the pole schedule.

The Pole Schedule shall be placed at the lower-left of the plan as illustrated in the sample plan in Appendix E. The pole schedule should be in the format as shown in Figure

2.1.F. Refer to Appendix H for a complete Sample Pole Schedule.


Figure 2.1.F

POLE SCHEDULE																	
POLE			SIGNAL M.A. LENGTH	SIGNAL MOUNTING			LUMINAIRE		PED PUSH BUTTON		STREET NAME SIGN		POLE LOCATION				
NO.	TYPE	SPEC YEAR		M.A.	POLE	PED	M.A. LENGTH	H.P.S. WATTS	NO.	PHASE	TYPE	LEGEND	A	B	C	D	E
①																	
②																	
③																	
④																	
⑤																	
⑥																	
⑦																	
⑧																	

2.1.15 Pole Location Detail: This detail supplements the pole schedule.

The Pole Location Detail should be placed next to the Pole Schedule as illustrated on the sample plan in Appendix E. The pole location detail is shown in figure 2.1.G.


Figure 2.1.G

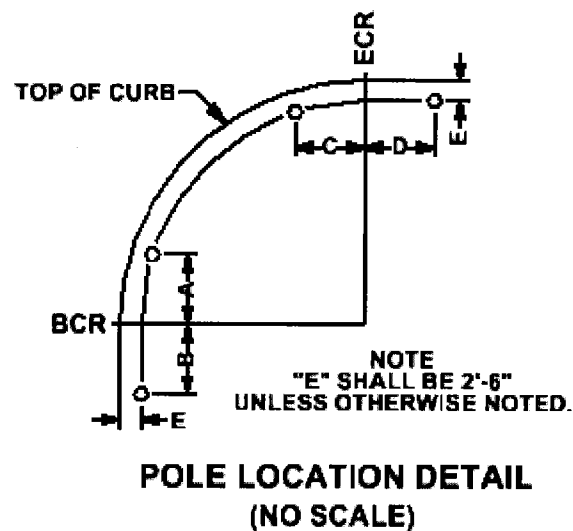

2.1.16 Miscellaneous Details

Other miscellaneous details such as median nose cutbacks (Figure 2.1.H), vehicle head configurations, and special sign details should be placed at the upper-left side of the plan.

Figure 2.1.H

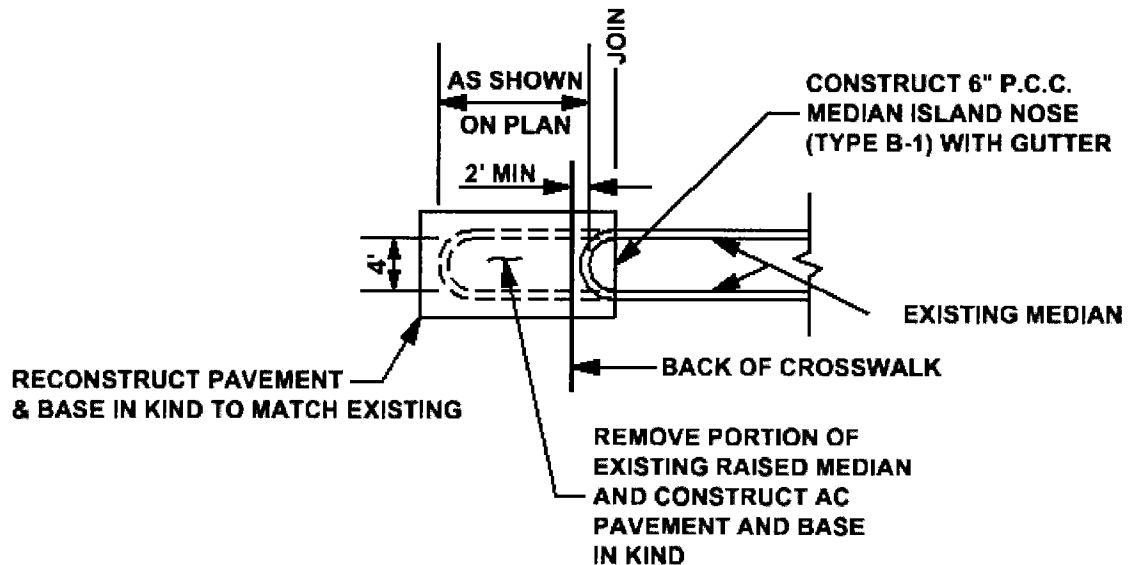

DETAIL " "
(NO SCALE)

2.1.17 Signal Operational Notes: These notes shall describe the recommended operation of the traffic signal.

Signal Operational notes should be placed directly beneath the Existing and/or Proposed Signal Phase Diagram as illustrated on the sample plan in Appendix E.

2.1.18 Construction Notes: Construction Notes should be placed at the bottom right-hand side of the plan as illustrated on the sample plan in Appendix E.

Construction Notes shall be used to describe specific work to be performed. All Construction Notes shall have a number

in a call out box assigned to the note and listed in numeric, sequential order under the Construction Notes heading.

Appendix C shows typical Construction Notes used by the County. These notes can be modified, or additional ones created, to reflect the work to be performed.

2.1.19 General Notes: General Notes should be placed at the upper right-hand side of the plan as illustrated on the sample plans in Appendix E.

General Notes shall be used to describe who will perform the necessary work indicated in the Construction Notes. Also, it will give specific instructions on how the work shall be done and what equipment is to be used.

Appendix D shows typical General Notes used by the County. These notes can be modified, or additional ones created, to reflect the work to be performed.

2.1.20 Thomas Guide Map Page

Thomas Guide page number and coordinates should be placed at the lower left margin as illustrated on the sample plans in Appendix E.

2.1.21 Traffic Signal (T.S.) Revision Number

All existing traffic signal plans that are modified, revised, or clouded shall show the sequential numerical revision number (R-x) after the T.S. number on the Title Block located on the lower right hand corner of the plan. See example in Appendix E – Sample Clouding T.S. Plan.

2.2 Existing Topography


2.2.1 Symbols

Appendix B shows the typical symbols used by the County.

2.2.2 Signal & Lighting Equipment

Show all signal and lighting equipment. All 8" lenses, which are not mounted on the signal mast arm, should be labeled on the plan. All arrow indications, i.e., 3-12" (RA, YA, GA), 4-12" (R, Y, G, GA) or 5-12" (R, Y, G, YA, GA), should be labeled. (See Figure 2.1.I)

Figure 2.1.I

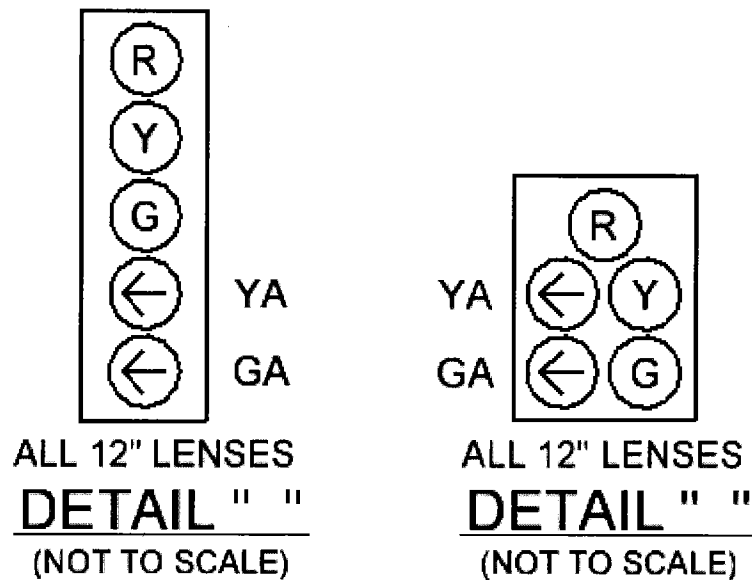

2.2.3 Conduit & Pull Boxes

All proposed and existing conduit sizes, #5 pull-boxes, and street lighting pull-boxes (slpb) shall be labeled.

Conductor Schedules are not required for intersections in County jurisdiction, however, other agencies may require them at shared intersections or 100% City intersections (this may depend on who maintains the intersection). If required, the agency's guidelines for the conductor schedule may need to be followed.

2.2.4 Signing, Striping, & Markings

All existing and proposed signing, striping, and pavement & curb markings shall be shown and labeled in conformance

with County legend and abbreviations. See Appendix A for Striping Line Styles.

2.2.5 Near Surface Structures

Show all near-surface drainage structures that may affect the installation or modification of signal and/or lighting equipment. These include box culverts, catch basins, water valves, manholes, Edison vaults, and telephone vaults. The vaults should be shown with the full subsurface dimension with surface access shown either square or round. Show storm drain mains or laterals if they are in the area of proposed conduits across roadway.

2.2.6 Underground and Overhead Utilities

Show and label all underground utilities, i.e., gasoline, oil, medium and high pressure gas lines, Edison underground and overhead lines, telephone ducts and cables, and/or any utilities that may affect the location of our signal equipment. These utilities shall be called out as to size and company, and located on plan in their proper place with respect to centerline, curb line, or property line. See Appendix A for Utility Line Styles.

2.2.7 Sidewalks & Driveways

Show all sidewalks and driveways near curb returns, signal standards, and loop detectors.

2.2.8 Crosswalks

Label all yellow and thermo-plastic crosswalks.

2.2.9 Trees

Show trees if they require trimming to enhance the visibility of the traffic signal.

2.2.10 Signal Service

Show location of service, service pole number, including telephone service, service conduit size, and pull box location and size.

2.2.11 Right-of-Way (R/W) Lines and Jurisdictional Boundary Lines

Show and label all R/W lines and Jurisdictional Boundary Lines on the plan. Line types shall be as indicated in Appendix A.

3.0 FIELD CHECK

A field check should be conducted prior to preparing a traffic signal plan. The following list illustrates some, but not all, of the items that should be picked-up on the field check. Photos should be taken of all approaches at the locations indicated in Appendix F.

NOTE: All of the items listed below should be picked-up approximately 400 feet on each approach of an arterial street and only 250 feet on each approach of a minor street.

3.1 Roadway Parameters

3.1.1 Roadway Geometry

Pick up all roadway widths, curb return radii, raised pavement medians, RR tracks, access ramps, side walks, bus pads, bridge decks, driveways, alleys, and pavement type (concrete or A.C.).

3.1.2 Striping & Pavement and Curb Markings

Pick up all crosswalks (including location from BCR, width and color), lane lines & lane widths, left turn pockets with length, pavement markings including arrows, RR xings, red & yellow curbs, and no stopping anytime & no parking anytime zones.

3.1.3 Signs & Posted Speeds

Pick up all warning, regulatory and guide signs; including posted speeds on all approaches within 300 feet of the intersection.

3.2 Signal & Lighting Equipment

3.2.1 Signal Vehicle Heads

Pick up all vehicle head types (i.e. 3-section, 5-section), hoods, size & type of lenses (i.e. PV, LED, 12" arrow or ball, etc.), and terminal compartments.

3.2.2 Pedestrian Heads

Pick up all pedestrian head types and messages displayed. Indicate audible and substandard pedestrian signals when present.

3.2.3 Standards

Pick up signal standard type and location from BCR, signal mast arm lengths, and luminaire mast arm lengths & wattage.

3.2.4 Pull-Boxes

Pick up type, size, and location.

3.2.5 Conduit

Pick up conduit size and approximate location.

3.2.6 Pedestrian Push Buttons

Pick up location and the phase which it serves.

3.2.7 Street Name Signs

Note whether the signs are illuminated or retro-reflective, internal or external, and pick up street names.

3.2.8 Controller Cabinet & Controller Type

When directed by the Agency, pick up cabinet inventory which includes type of cabinet & location of cabinet, controller model, signal phasing & operation, number of I.L.D. sensor units, number of switch packs, number of pedestrian isolation modules, type of modem, program type, interconnect type, and any other equipment located in the controller cabinet.

3.2.9 Detection

Pick up detection type, size, and location, phase designation, and number of detector lead-in cables.

3.2.10 Street Lighting

Show street lighting only within 300 feet of the intersection.

3.3 Drainage

Pick up box culverts, catch basins, gutter widths, cross gutters, local depression affecting ILDs, pressure pads, and manholes affecting ILDs or conduit runs.

3.4 Utilities

Pick up power poles, hydrants, guy poles, water valves, water meters, utility vaults, and hazardous overhead & underground utilities.

3.5 Service

Pick up service type & location, service conduit size & length, service point (pole number or vault), pull-box (location & size) in vicinity of service point.

3.6 Miscellaneous

Pick up trees or other objects that may be in the line of sight of the traffic signal.

4.0 RIGHT OF WAY REQUIREMENTS

Any need for additional right of way, other than what is existing, should be determined at this point in the design of the traffic signal.

A “permit” to enter, construct, and maintain traffic signal equipment and appurtenances should be obtained from railroad companies, public utilities, County, and/or City properties and other long term entities.

Any easement for the same purposes as a “permit” should be obtained in all cases where there is a possibility the property needed may be sold to another party. A “permit” becomes null and void with a change in ownership.

Either a “permit” or easement shall be obtained before a project goes to contract.

APPENDIX A

TRAFFIC AND LIGHTING LINE STYLES

		LINESTYLE	LEVEL	COLOR	WEIGHT
EXIST SOLID	-----	EXSOLID	8	Y	1
SOLID	—————	SOLID	15	C	3
EXIST LANE	--- --	EXLANE	8	Y	1
PROP LANE	- - - -	PROPLANE	9	C	3
EXIST LEADIN	-----	EXLEADIN	21	M	3
PROP LEADIN	—————	LEADIN	22	G	5
EXIST CONDUIT	-----	CONDUIT	16	M	5
PROP CONDUIT	-----	CONDUIT	17	G	7
EXIST LANE EXTENSION	-----	EXLNEXT	8	Y	1
PROP LANE EXTENSION	LNEXT	9	C	3
EXIST LANE DROP	EXLNDROP	8	Y	1
PROP LANE DROP	- - - -	LANEDROP	9	C	3
EXIST LANE EXTENSION	o o o o o o o	EXLNEXTA	8	Y	1
PROP LANE EXTENSION	LNEXTA	9	C	3
EXIST DOUBLE CENTER	=====	EXDOUBLE	8	Y	1
PROP DOUBLE CENTER	=====	PROPOBL	9	C	3
EXIST PASSING ZONE	-----	EXPASSZN	8	Y	1
PROP PASSING ZONE	-----	PASSZONE	9	C	3
LIGHTING DISTRICT BOUNDARY	— — — —	LGTBDY	30	G	3
COMMON LIGHTING DISTRICT BOUNDARY	- - - - -	CLGTBDY	31	Y	1
CENTER LINE	-----	CLINE	35	G	3

COLOR LEGEND:

R • RED G • GREEN Y • YELLOW BR • BROWN R/W LINE ————— R/W 6 B 6
 B • BLUE W • WHITE M • MAGENTA
 C • CYAN GR • GRAY O • ORANGE CITY BOUNDARY ----- CITY 35 W 3
 NOT TO SCALE

APPENDIX A

UTILITY LINE STYLES

		LINESTYLE	LEVEL	COLOR	WEIGHT
CABLE TELEVISION LINES	-----	CABLE	8	Y	1
STORM DRAIN LINES	—————	DRAIN	15	G	1
ELECTRICAL POWER LINES	-----	ELECTRIC	9	M	1
GASOLINE LINES	-----	FUEL	10	G	1
NATURAL GAS LINES	-----	GAS	12	B	1
STREET LIGHT LINES	-----	LIGHT	11	C	1
CRUDE OIL LINES	-----	OIL	13	R	1
PHONE LINES	-----	PHONE	14	M	1
SEWER LINES	-----	SEWER	16	M	1
WATER LINES	-----	WATER	17	G	1

COLOR LEGEND:

R = RED G = GREEN Y = YELLOW
 B = BLUE W = WHITE M = MAGENTA
 C = CYAN GR = GRAY O = ORANGE
 NOT TO SCALE

APPENDIX B

PROPOSED


EXISTING



SIGNAL AND LIGHTING CONDUIT



DETECTOR AND SERVICE CONDUIT



STREET LIGHTING CONDUIT



LOUVERED VISOR (LEFT ANGLE SHOWN -
REVERSE FOR RIGHT ANGLE)



TRAFFIC SIGNAL PULL BOX (PB)



STREET LIGHTING PULL BOX (SLPB)




CONTROLLER CABINET




UNDERGROUND SERVICE CABINET




TRAFFIC SIGNAL POLE




VEHICLE SIGNAL HEAD WITH NO BACK PLATE




VEHICLE SIGNAL HEAD WITH BACK PLATE





PROGRAMMED VISIBILITY VEHICLE HEAD
(3-12" SECTIONS)




SIGNAL VEHICLE HEAD WITH ALL 12" ARROW
INDICATIONS (REVERSE DIRECTION OF
ARROW FOR LEFT OR RIGHT TURNS)



PEDESTRIAN SIGNAL HEAD



SIGNAL AND LUMINAIRE MAST ARMS WITH
VEHICLE SIGNAL HEAD, 3-12" SECTIONS
WITH BACK PLATE



MAST ARM WITH VEHICLE SIGNAL HEAD,
3-12" SECTIONS WITH BACK PLATE

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS



SYMBOLS

SHEET 1 OF 3



APPENDIX B

PROPOSED


EXISTING



TRAFFIC SIGNAL POLE WITH VEHICLE SIGNAL
AND PEDESTRIAN HEADS



TRAFFIC SIGNAL POLE WITH LUMINAIRE
MAST ARM



RETRO-REFLECTIVE MAST ARM MOUNTED
SIGN



INTERNALLY ILLUMINATED MAST ARM
MOUNTED SIGN



INDUCTIVE LOOP DETECTOR




BICYCLE LOOP DETECTOR



VIDEO DETECTION CAMERA



VIDEO DETECTION ZONE



WIRELESS RADIO ANTENNA



FLASHING BEACON



MANHOLE



FIRE HYDRANT

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS

SYMBOLS

SHEET 2 OF 3

APPENDIX B

PROPOSED

EXISTING



TELEPHONE POLE



POWER POLE




STREET LIGHTING POLE



UTILITY VAULT



RAILROAD CROSSING SIGNAL



RAILROAD BEACON



DEADMAN



GUY POLE



OAK TREE



OTHER TREE

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS

SYMBOLS

SHEET 3 OF 3

APPENDIX C:

TYPICAL CONSTRUCTION NOTES

1

REUSE EXISTING TYPE 332 CABINET COMPLETE WITH TYPE 170 ATC/HC-11 CONTROLLER, LACO-4E PROGRAM, (#) 2-CHANNEL ILD SENSOR UNITS, (#) PED ISOLATION MODULES, (#) SWITCH PACKS, (#) EV PREEMPTION MODULE(S), AND GPS UNIVERSAL TIME BASE UNIT AND ANTENNA.

-OR-

1

REUSE EXISTING TYPE 332 CABINET COMPLETE WITH (#) 2-CHANNEL ILD SENSOR UNITS, (#) PED ISOLATION MODULES, AND (#) SWITCH PACKS. REMOVE EXISTING TYPE 170E CONTROLLER, LACO-1R WWV PROGRAM, AND RADIO CORRECTED TIME BASE UNIT. INSTALL NEW TYPE 170 ATC/HC-11 CONTROLLER, LACO-4E PROGRAM, (#) 2-CHANNEL ILD SENSOR UNIT(S), (#) SWITCH PACK(S), AND GPS UNIVERSAL TIME BASE UNIT AND ANTENNA. RE-WIRE CONTROLLER CABINET.

-OR-

1

REUSE EXISTING TYPE 332 CABINET COMPLETE WITH TYPE 170 ATC/HC-11 CONTROLLER, LACO-4E PROGRAM, (#) 2-CHANNEL ILD SENSOR UNITS, (#) PED ISOLATION MODULES, (#) EV PREEMPTION MODULE(S), (#) SWITCH PACKS, AND BATTERY BACK-UP SYSTEM. REMOVE EXISTING RADIO CORRECTED TIME BASE UNIT. INSTALL (#) 2-CHANNEL ILD SENSOR UNIT(S), (#) SWITCH PACK(S), GPS UNIVERSAL TIME BASE UNIT AND ANTENNA. RE-WIRE CONTROLLER CABINET.

-OR-

1

REMOVE EXISTING TYPE P CABINET AND TYPE ASC/2S-2100 CONTROLLER COMPLETE. REMOVE FOUNDATION. INSTALL NEW TYPE 332 CABINET ON NEW FOUNDATION COMPLETE WITH TYPE 170 ATC/HC-11 CONTROLLER, LACO-4E PROGRAM, (#) 2-CHANNEL ILD SENSOR UNITS, (#) PED ISOLATION MODULES, (#) SWITCH PACKS, AND GPS UNIVERSAL TIME BASE UNIT AND ANTENNA. RE-WIRE INTERSECTION.

-OR-

1

REMOVE EXISTING TYPE M CABINET COMPLETE WITH ASC-8000 CONTROLLER. REMOVE FOUNDATION. INSTALL NEW TYPE 332 CABINET ON NEW FOUNDATION COMPLETE WITH TYPE 170 ATC/HC-11 CONTROLLER, LACO-4E PROGRAM, (#) PED ISOLATION MODULES, (#) AC ISOLATION MODULE FOR RR PREEMPTION, (#) SWITCH PACKS, GPS UNIVERSAL TIME BASE UNIT AND ANTENNA, ITERIS VIDEO DETECTION SYSTEM COMPLETE WITH VANTAGE EDGE 2 PROCESSOR, ITERIS EDGE CONNECT MODULE, 17" RACK MOUNTED LCD MONITOR DRAWER, AND ALL OTHER EQUIPMENT NECESSARY FOR THE INTENDED OPERATION

AS SHOWN ON THE PLAN. SEE SPECIAL PROVISIONS. RE-WIRE INTERSECTION.

-OR-

- 1 REUSE EXISTING TYPE P CABINET COMPLETE WITH ASC/3S-2100 CONTROLLER, AND (#) SWITCH PACKS. INSTALL ECONOLITE AUTOSCOPE VIDEO DETECTION SYSTEM OR EQUIVALENT, "D" CONNECTOR INTERFACE PANEL AND CABLE, (#) SWITCH PACKS, AND GPS UNIVERSAL TIME BASE UNIT AND ANTENNA. REMOVE (#) ILD SENSOR UNIT. REWIRE CONTROLLER CABINET.
- 2 INSTALL LOOP(S) AS SHOWN.
- 3 PROTECT EXISTING LOOP WIRES.
- 4 SPLICE NEW LOOP(S) TO EXISTING DLC.
- 5 INSTALL NEW (#) 2-PAIR DLC ('S) TO CONTROLLER CABINET. LENGTH OF EACH DLC IS AS SHOWN ON PLAN.
- 6 INSTALL VIDEO DETECTION CAMERA ON LUMINAIRE MAST ARM PER MANUFACTURER'S SPECIFICATIONS. SEE SPECIAL PROVISIONS.
- 7 INSTALL ____" PVC CONDUIT. LENGTH IS AS SHOWN ON PLAN.
- 8 INSTALL 2-3" PVC CONDUIT. LENGTH IS AS SHOWN ON PLAN.
- 9 INSTALL 3' PVC CONDUIT PER SOUTHERN CALIFORNIA EDISON (SCE) SPECIFICATIONS. SEE GENERAL NOTE "X".
- 10 INSTALL #__ PULL BOX AS SHOWN.
- 11 INTERCEPT EXISTING CONDUIT AND INSTALL NEW #__ PULL BOX AS SHOWN.
- 12 REMOVE EXISTING PULL BOX. INSTALL #__ PULL BOX.
- 13 REMOVE EXISTING PULL BOX AS SHOWN.
- 14 ABANDON EXISTING LOOPS AS SHOWN.
- 15 ABANDON. IF APPLIED TO CONDUIT, REMOVE CONDUCTORS.
- 16 INSTALL 3-12" LED VEHICLE HEAD (R, Y, G).
- 17 INSTALL 3-12" LED PROGRAMMED VISIBILITY HEAD (R, Y, G).
- 18 INSTALL 3-12" LED LOUVERED VEHICLE HEAD (R, Y, G).

- 19 INSTALL LOUVERS ON YELLOW AND RED LENSES.
- 20 REMOVE EXISTING VEHICLE HEAD. INSTALL NEW 3-12" LED VEHICLE HEAD (R,Y,G) ON EXISTING STANDARD AS SHOWN.
- 21 REMOVE EXISTING VEHICLE HEAD. INSTALL 5-12" LED VEHICLE HEAD (R, Y, G, YA, GA) ON EXISTING STANDARD AS SHOWN. SEE DETAIL "X".
- 22 REMOVE EXISTING VEHICLE HEAD. MODIFY SIGNAL MOUNTINGS AS NEEDED.
- 23 RELOCATE EXISTING VEHICLE HEAD AND/OR PEDESTRIAN HEAD AS SHOWN (SEE POLE SCHEDULE). MODIFY SIGNAL MOUNTINGS AS NEEDED.
- 24 ROTATE EXISTING VEHICLE HEAD AND CONNECT TO PHASE # AS INDICATED ON PLAN. MODIFY SIGNAL MOUNTINGS AS NEEDED.
- 25 INSTALL NEW PEDESTRIAN HEAD AS SHOWN.
- 26 RELOCATE EXISTING PEDESTRIAN HEAD AS SHOWN.
- 27 ROTATE EXISTING PEDESTRIAN HEAD AND CONNECT TO PHASE # AS INDICATED ON PLAN. MODIFY SIGNAL MOUNTINGS AS NEEDED.
- 28 INSTALL PEDESTRIAN PUSH BUTTON ON EXISTING STANDARD. (SEE POLE SCHEDULE).
- 29 INSTALL PEDESTRIAN PUSH BUTTON POST AND FOUNDATION. (SEE POLE SCHEDULE).
- 30 REMOVE PEDESTRIAN PUSH BUTTON AND PLATE HOLE TO A SMOOTH FINISH.
- 31 REMOVE EXISTING TYPE ____ STANDARD COMPLETE. REMOVE EXISTING FOUNDATION. (SEE POLE SCHEDULE).
- 32 REMOVE EXISTING TYPE ____ STANDARD COMPLETE. REMOVE EXISTING FOUNDATION. INSTALL NEW TYPE ____ STANDARD ON NEW FOUNDATION COMPLETE WITH EQUIPMENT AS SHOWN. RELOCATE EXISTING STREET NAME SIGN TO NEW POLE. (SEE POLE SCHEDULE).
- 33 INSTALL NEW TYPE ____ STANDARD ON NEW FOUNDATION COMPLETE WITH NEW EQUIPMENT AS SHOWN (SEE POLE SCHEDULE).
- 34 CONSTRUCT CURB ACCESS RAMP PER CASE ____ PER CALTRANS REVISED STANDARD PLAN RSP A88A.

- 35 INSTALL SURFACE APPLIED DETECTABLE WARNING SURFACE PER CALTRANS REVISED SYANDARD PLAN RSP A88A.
- REMOVE EXISTING CURB ACCESS RAMP AND REPLACE PAVEMENT IN KIND.
- 36 REMOVE RADIO CORRECTED TIME BASE UNIT ANTENNA.
- 37 RELOCATE EXISTING WIRELESS RADIO ANTENNA TO NEW STANDARD. SEE GENERAL NOTE "X".
- 38 RELOCATE EXISTING VIDEO DETECTION CAMERA TO NEW STANDARD.
- 39 REUSE EXISTING WIRELESS RADIO EQUIPMENT.
- 40 CUTBACK (OR EXTEND) MEDIAN NOSE. SEE DETAIL "____". RESTRIPE CROSSWALK.
- 41 INSTALL TYPE III-BF ANODIZED ALUMINUM UNDERGROUND SERVICE COMPLETE WITH FOUNDATION PER COUNTY OF LOS ANGELES DPW SPECIFICATIONS (SEE SPECIAL PROVISIONS).
- 42 INSTALL NEW TYPE III-BF ANODIZED ALUMINUM UNDERGROUND SERVICE CABINET PER CALTRANS STANDARD ES-2E COMPLETE WITH 1-120/240V, 2P MAIN CIRCUIT BREAKERS, 1-50A 120V, IP CIRCUIT BREAKERS FOR TRAFFIC SIGNALS (METERED) AND 2-30A, 120V IP CIRCUIT BREAKERS (UNMETERED) FOR HIGHWAY SAFETY LIGHTS. (SEE SPECIAL PROVISIONS)
- 43 REUSE EXISTING TYPE _____ UNDERGROUND SERVICE CABINET.
- 44 REMOVE EXISTING SERVICE METER MOUNTED ON S.P. # (SERVICE POLE NUMBER. CALL OUT SERVICE QUADRANT, IF KNOWN OR IF NEW SERVICE IS TO BE INSTALLED OR IF MODIFYING THE EXISTING SERVICE). INSTALL TYPE III-BF ANODIZED ALUMINUM UNDERGROUND SERVICE COMPLETE WITH FOUNDATION PER COUNTY OF LOS ANGELES DPW SPECIFICATIONS (SEE SPECIAL PROVISIONS).
- 45 CONTRACTOR SHALL COORDINATE WITH SOUTHERN CALIFORNIA EDISON THE REMOVAL OF EXISTING STREET LIGHTING POLE AND FOUNDATION.
- 46 INSTALL S.L.P.B. WITHOUT BALLAST; REMOVE BALLAST.
- 47 INSTALL CURB ACCESS RAMP WITH DETECTABLE WARNING SURFACE PER CALTRANS REVISED STANDARD PLAN RSP A88A CASE #. (SEE SPECIAL PROVISIONS)

- 48 CONSTRUCT 4" P.C.C. WALK OR CONSTRUCT 2" A.C. WALK
(APPROXIMATE AREA INDICATED IN SQUARE FEET AND THIS AREA
SHOWN HACHURED ON PLAN).
- 49 REMOVE; RELOCATE; REORIENT; REMOUNT; ABANDON; ADD BACK
PLATE; REUSE; DISCONNECT.
- 50 TRIM TREE. (NOTE FOR EACH TREE)
- 51 INSTALL NEW SIGN(S) ON EXISTING STANDARD AS SHOWN.
- 52 INSTALL SIGN(S) ON NEW POST AS SHOWN.
- 53 INSTALL SIGN(S) AS SHOWN.
- 54 REMOVE EXISTING SIGN(S) AS SHOWN.
- 55 RELOCATE EXISTING SIGN(S) AS SHOWN.
- 56 RELOCATE EXISTING STREET NAME SIGN. (SEE POLE SCHEDULE).
- 57 INSTALL ____" SOLID WHITE LINE. LENGTH IS AS SHOWN ON PLAN.
- 58 INSTALL DETAIL _____. LENGTH IS AS SHOWN ON PLAN.
- 59 INSTALL CROSSWALK.
- 60 INSTALL TYPE ____ ARROW PER CALTRANS STANDARD PLAN.
- 61 INSTALL TYPE ____ PAVEMENT MARKING.
- 62 INSTALL ____ CURB. LENGTH IS AS SHOWN ON PLAN.
- 63 INSTALL ____" WHITE DIAGONAL LINES.
- 64 REPAINT EXISTING 12" YELLOW CROSSWALKS.
- 65 REMOVE CONFLICTING STRIPING, INCLUDES REMOVAL OF RAISED
PAVEMENT MARKERS.
- 66 REMOVE CONFLICTING PAVEMENT MARKING.
- 67 REMOVE EXISTING ____ CURB.

APPENDIX D: **TYPICAL GENERAL NOTES**




TRAFFIC SIGNAL PLANS:

1. TRAFFIC SIGNAL, LIGHTING, AND ELECTRICAL SYSTEMS SHALL CONFORM TO THE LOS ANGELES COUNTY STANDARDS WHICH INCLUDE THE STANDARD PLANS FOR PUBLIC WORKS CONSTRUCTION, 2006 EDITION, STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (GREEN BOOK), 2012 EDITION, AND THE LOS ANGELES COUNTY DEPARTMENT OF PUBLIC WORKS TRAFFIC SIGNAL CONTROL EQUIPMENT SPECIFICATIONS, LATEST EDITION, UNLESS OTHERWISE NOTED ON THE PLAN OR IN THE SPECIAL PROVISIONS.

-OR-

TRAFFIC SIGNAL, LIGHTING, STRIPING AND MARKINGS SHALL CONFORM TO THE STATE OF CALIFORNIA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS - SECTION 86, 2006 EDITION, AND STANDARD PLANS, 2006 EDITION, UNLESS OTHERWISE NOTED ON THE PLAN OR SPECIAL PROVISIONS.



2. ALL MATERIALS AND EQUIPMENT SHALL BE FURNISHED AND INSTALLED BY THE CONTRACTOR, EXCEPT LACO-4E PROGRAM.
3. LACO-4E PROGRAM SHALL BE FURNISHED AND INSTALLED BY THE AGENCY.
4. THE GPS UNIVERSAL TIME BASE UNIT AND ANTENNA SHALL BE MOUNTED PER MANUFACTURER'S GUIDELINES. THE GPS UNIVERSAL TIME BASE UNIT ANTENNA SHALL BE LOCATED ON THE STREET SIDE OF THE TOP OF THE CONTROLLER CABINET.
5. ALL WIRING SHALL BE MARKED (TAGGED) WITHIN THE CONTROLLER CABINET FOR PHASE IDENTIFICATION.
6. ALL SIGNAL EQUIPMENT SHALL BE WIRED IN ACCORDANCE WITH THE PROPOSED OR EXISTING SIGNAL PHASE DIAGRAM.
7. (XXXX) OR (X-X-XX FOR NEMA CONTROLLERS) INDICATES LOOP AND/OR VIDEO DETECTION ZONE ASSIGNMENT IN THE CONTROLLER CABINET. EACH LOOP ASSIGNMENT SHALL HAVE A SEPARATE LEAD-IN CABLE TO THE CONTROLLER.

8. ALL LOOPS SHALL BE CENTERED IN THE MIDDLE OF THE LANE AND FRONT LOOPS SHALL BE PLACED BEHIND THE EDGE OF THE CROSSWALK OR LIMIT LINE, UNLESS OTHERWISE NOTED.
9. ALL LOOPS SHALL BE ROUND (6' DIAMETER), UNLESS OTHERWISE NOTED.
10. TWO-PAIR DLC CABLE SHALL BE USED THROUGHOUT THE EXTENT OF THIS MODIFICATION UNLESS OTHERWISE NOTED. SEE SPECIAL PROVISIONS.
11.  INDICATES BICYCLE LOOP DETECTOR. SEE BICYCLE/VEHICLE LOOP DETECTOR INSTALLATION STANDARD PLAN IN THE SPECIAL PROVISIONS.
12.  DENOTES PROPOSED QUEUE DETECTION.
13.  DENOTES EXISTING QUEUE DETECTION.
14. VIDEO DETECTION SYSTEM AND CAMERA SHALL BE FURNISHED AND INSTALLED BY THE CONTRACTOR. MANUFACTURER REPRESENTATIVE SHALL BE PRESENT DURING THE INSTALLATION OF THE VIDEO DETECTION SYSTEM AND CAMERA. SEE SPECIAL PROVISIONS.
15. VIDEO DETECTION SYSTEM TO BE ITERIS COMPLETE WITH VANTAGE EDGE 2 PROCESSOR OR EQUIVALENT, ITERIS EDGE CONNECT MODULE, AND 17" RACK MOUNTED LCD MONITOR DRAWER. MANUFACTURER REPRESENTATIVE SHALL BE PRESENT DURING THE INSTALLATION OF THE VIDEO DETECTION SYSTEM. SEE SPECIAL PROVISIONS.

-OR-

VIDEO DETECTION SYSTEM TO BE ECONOLITE AUTOSCOPE WITH RACK MOUNTED VIDEO PROCESSOR UNITS OR EQUIVALENT. MANUFACTURER REPRESENTATIVE SHALL BE PRESENT DURING THE INSTALLATION OF THE VIDEO DETECTION SYSTEM. SEE SPECIAL PROVISIONS.

16. ALL DETECTION ZONES SHALL BE CENTERED IN THE MIDDLE OF THE LANE AND FRONT DETECTION ZONES SHALL BE PLACED BEHIND THE EDGE OF THE CROSSWALK OR LIMIT LINE, UNLESS OTHERWISE NOTED.

17. DETECTORS AND/OR VIDEO DETECTION ZONES SHALL BE WIRED/RE-CONFIGURED PER DETECTOR ASSIGNMENTS SHOWN ON THIS PLAN.
18.  INDICATES PROPOSED VIDEO DETECTION ZONE.
19.  INDICATES VIDEO DETECTION CAMERA.
20. REMOVAL OR RELOCATION OF WIRELESS RADIO EQUIPMENT AND ANTENNA SHALL BE DONE BY THE AGENCY. CONTRACTOR SHALL CONTACT MR. JEFF MAGALLANES AT (626) 458-1700 TEN (10) WORKING DAYS IN ADVANCE FOR COORDINATION.
21. CCTV CAMERA SHALL BE RELOCATED BY THE AGENCY. CONTRACTOR SHALL CONTACT MR. JEFF MAGALLANES AT (626) 458-1700 TEN (10) WORKING DAYS IN ADVANCE FOR COORDINATION.
22. ALL NEW PULL BOXES SHALL BE NO. 6, UNLESS SHOWN OTHERWISE.
23. ALL NEW UNDERGROUND CONDUIT SHALL BE SCHEDULE 80 PVC, UNLESS OTHERWISE APPROVED BY THE ENGINEER.
24. ALL EXISTING CONDUITS SHALL BE REUSED UNLESS OTHERWISE NOTED OR APPROVED BY THE ENGINEER. ALL EXISTING INDIVIDUAL CONDUCTORS AFFECTED BY THE ADDITION OF NEW CONDUCTORS AND/OR DLC'S SHALL BE REMOVED AND REPLACED WITH MULTI-CONDUCTOR CABLES UNLESS OTHERWISE NOTED OR APPROVED BY THE ENGINEER.
25. THREE-CONDUCTOR CABLE (3CSC), FIVE-CONDUCTOR CABLE (5CSC), AND TWELVE-CONDUCTOR CABLE (12CSC) SHALL BE INSTALLED IN LIEU OF INDIVIDUAL CONDUCTORS AND SHALL CONFORM TO SECTION 86-2.08D OF THE CALTRANS STANDARD SPECIFICATIONS FOR CONSTRUCTION OF LOCAL STREETS AND ROADS (LATEST EDITION), UNLESS OTHERWISE SPECIFIED IN THE SPECIAL PROVISIONS. NO OTHER TRAFFIC SIGNAL (TS) MULTI CONDUCTOR CABLE WILL BE ACCEPTED UNLESS OTHERWISE APPROVED BY THE ENGINEER.

-OR-

TWENTY EIGHT-CONDUCTOR CABLE (28CSC) SHALL BE INSTALLED IN LIEU OF INDIVIDUAL CONDUCTORS AND SHALL CONFORM TO SECTION 86-2.08D OF THE CALTRANS STANDARD SPECIFICATIONS FOR CONSTRUCTION OF LOCAL STREETS

AND ROADS (LATEST EDITION), UNLESS OTHERWISE SPECIFIED IN THE SPECIAL PROVISIONS. NO OTHER TRAFFIC SIGNAL (TS) MULTI CONDUCTOR CABLE WILL BE ACCEPTED UNLESS OTHERWISE APPROVED BY THE ENGINEER

26. SIGNAL, LIGHTING, AND ELECTRICAL SYSTEMS SHALL CONFORM TO THE CITY OF _____ SPECIFICATIONS AS OUTLINED IN THE SPECIAL PROVISIONS.
27. NEW VEHICLE HEADS SHALL BE 12" L.E.D. (LIGHT EMITTING DIODE). VEHICLE HEADS PER LOS ANGELES COUNTY DPW SPECIFICATIONS. (SEE SPECIAL PROVISIONS).
28. NEW PEDESTRIAN HEADS SHALL BE L.E.D. (LIGHT EMITTING DIODE). (SEE SPECIAL PROVISIONS).
29. ALL NEW PEDESTRIAN PUSH BUTTONS SHALL BE ADA COMPLIANT.
30. POLE LOCATIONS SHOWN HEREON ARE APPROXIMATE. PRECISE LOCATIONS SHALL BE ESTABLISHED IN THE FIELD AND VERIFIED BY THE PROJECT ENGINEER.
31. ALL NEW SIGNAL POLES WITH PEDESTRIAN PUSH BUTTONS SHALL BE INSTALLED NO FURTHER THAN 5 FEET FROM THE BACK OF CROSSWALK OR LIMIT LINE UNLESS OTHERWISE NOTED.
32. THE CONTRACTOR SHALL MAINTAIN PROPER ADA CLEARANCES AROUND ALL NEW POLES, CABINETS, OR ANY OTHER ABOVE-GROUND EQUIPMENT TO BE INSTALLED AS PART OF THIS PROJECT. ALL NEW POLES, CONDUIT, AND PULL BOXES SHALL BE INSTALLED OUTSIDE OF CURB ACCESS RAMPS.
33. ALL NEW CURB ACCESS RAMPS SHALL CONFORM TO THE CALTRANS STANDARD PLANS AND SPECIFICATIONS, LATEST EDITION.
34. THE 3-INCH CONDUIT FROM THE EDISON PULL BOX TO THE SERVICE CABINET SHALL BE INSTALLED PER SCE COMPANY REQUIREMENTS. FOR ELECTRICAL SERVICE CONNECTION, CALL SOUTHERN CALIFORNIA EDISON COMPANY, MR. _____ AT _____. APPLICABLE SERVICE CONNECTION, RISER COSTS, AND CONSTRUCTION TAX SHALL BE PAID BY THE CONTRACTOR.

35. THE CONTRACTOR SHALL CONTACT COUNTY OF LOS ANGELES STREET LIGHTING SECTION AT (626) _____ TO OBTAIN THE REQUIRED FORMS TO AUTHORIZE SOUTHERN CALIFORNIA EDISON TO RELOCATE AND/OR REMOVE INDICATED STREET LIGHTING PRIOR TO ENERGIZING THE TRAFFIC SIGNAL AND HIGHWAY SAFETY LIGHTS. ALL COSTS ASSOCIATED WITH THE STREET LIGHT RELOCATION AND/OR REMOVAL SHALL BE PAID BY THE CONTRACTOR. (APPLICABLE WHEN WITHIN COUNTY OF LOS ANGELES STREET LIGHTING DISTRICT).
36. THE CONTRACTOR SHALL COORDINATE THE REMOVAL OF STREET LIGHT POLES WITH SCE COMPANY. FOR COORDINATION CALL THE SOUTHERN CALIFORNIA EDISON COMPANY, MR. _____ AT _____. APPLICABLE SERVICE COSTS AND CONSTRUCTION TAX SHALL BE PAID BY THE CONTRACTOR.
37. SERVICE POINT SHALL BE DESIGNATED BY THE UTILITY COMPANY. THE CONTRACTOR SHALL INSTALL CONDUIT AND CONDUCTORS TO THE DESIGNATED POLE AND INSTALL TYPE _____ SERVICE AT THE DESIGNATED LOCATION.
38. THE CONTRACTOR SHALL CONTACT UNDERGROUND SERVICE ALERT BY DIALING 811 (48) HOURS PRIOR TO ANY EXCAVATION. THE CONTRACTOR IS REQUIRED TO ASCERTAIN THE EXACT LOCATION OF THE UNDERGROUND FACILITIES PRIOR TO DOING WORK THAT MAY DAMAGE OR INTERFERE WITH THEIR SERVICE.
39. FOR DISPOSITION OF SALVAGED MATERIALS, SEE SPECIAL PROVISIONS.
40. EXACT LOCATION OF ALL SHOWN UTILITIES IS THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY.
41. ALL TRAFFIC LINES AND MARKINGS SHALL CONFORM TO CALTRANS STANDARD PLANS AND SPECIFICATIONS (LATEST EDITION).
42. ALL TRAFFIC LINES AND PAVEMENT MARKINGS SHALL BE INSTALLED WITH TWO-COAT PAINT, TAPE, OR THERMOPLASTIC BY THE CONTRACTOR (OR AGENCY), UNLESS OTHERWISE NOTED.
43. ALL CONFLICTING LINES AND MARKINGS SHALL BE REMOVED BY WET SANDBLASTING AND INCLUDES REMOVAL OF RAISED PAVEMENT MARKERS.

- 44. PROPOSED CROSSWALK SHALL BE 13' UNLESS OTHERWISE NOTED.
- 45. ALL NEW SIGNING SHALL CONFORM TO THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LATEST EDITION.
- 46. ALL SIGNING SHOWN HEREON SHALL BE INSTALLED, RELOCATED, OR REMOVED BY THE CONTRACTOR, UNLESS OTHERWISE NOTED.
- 47. CONTACT LOS ANGELES COUNTY DEPARTMENT OF PUBLIC WORKS, TRAFFIC AND LIGHTING DIVISION, TRAFFIC SYSTEMS SECTION AT (626) 300-4709 ONE MONTH IN ADVANCE OF SIGNAL CONSTRUCTION TO COORDINATE SIGNAL TIMING AND IMPLEMENTATION.

SIGNING AND STRIPING PLANS:

1. ALL TRAFFIC LINES AND PAVEMENT MARKINGS SHOWN SHALL BE INSTALLED WITH (TAPE, TWO-COAT PAINT, OR THERMOPLASTIC) BY THE CONTRACTOR (OR AGENCY), UNLESS OTHERWISE NOTED.
2. ALL TRAFFIC LINES AND PAVEMENT MARKINGS SHALL CONFORM TO CALTRANS STANDARD PLANS AND SPECIFICATIONS (LATEST EDITION).
3. ALL CONFLICTING LINES AND MARKINGS SHALL BE REMOVED BY WET SANDBLASTING OR GRINDING (THEN PAINTED BLACK) AND INCLUDES REMOVAL OF RAISED PAVEMENT MARKERS.
4. ALL TURN ARROW MARKINGS SHALL BE TYPE IV (L OR R) UNLESS OTHERWISE NOTED.
5. ALL LANE STRIPING AT INTERSECTION APPROACHES WITHOUT CROSSWALKS OR LIMIT LINES SHALL END 10 FEET FROM THE EXTENSION OF THE INTERSECTING CURB LINE
6. ALL LANE LINES AT INTERSECTION APPROACHES AND DEPARTURES SHALL BEGIN AND END WITH 50 FEET OF 4-INCH SOLID WHITE LINE.
7. LANE WIDTHS SHALL BE MEASURED BETWEEN THE CENTERLINES OF EACH ADJACENT SINGLE OR DOUBLE STRIPE OR TOP OF CURB AS APPROPRIATE.
8. PROPOSED LIMIT LINE SHOULD BE INSTALLED AT A MINIMUM OF 4 FEET BEHIND THE EXISTING CURB EXTENSION OR EDGE OF TRAVEL WAY (NO EXISTING CURB ACCESS RAMP). IN THE CASE OF INTERSECTION WITH CURB ACCESS RAMP, THE LIMIT LINE SHALL BE PLACED BEHIND THE RAMP'S LANDING AREA, BUT IN NO CASE GREATER THAN 30 FEET BACK.
9. EXISTING RAISED PAVEMENT MARKERS DAMAGED DURING REMOVAL SHALL BE REPLACED BY THE CONTRACTOR.
10. ALL NEW SIGNING SHALL CONFORM TO THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES, LATEST EDITION.
11. ALL SIGNING SHOWN HEREON SHALL BE INSTALLED, RELOCATED, OR REMOVED BY THE CONTRACTOR, UNLESS OTHERWISE NOTED.

OR IF DONE BY THE AGENCY:


ALL SIGNING SHOWN HEREON SHALL BE INSTALLED, RELOCATED, OR REMOVED BY THE AGENCY, UNLESS OTHERWISE NOTED.

12. ALL G7 SIGNS SHALL BE 18" HIGH AND HAVE 6" UPPERCASE AND 4 ½" LOWERCASE LETTERING UNLESS OTHERWISE SHOWN ON PLANS.
13. PROPOSED STRIPING BY THE AGENCY. (IF STRIPING DONE BY AGENCY)
14. SEE TRAFFIC SIGNAL PLAN FOR LOCATION OF CROSSWALKS AT SIGNALIZED INTERSECTIONS.

APPENDIX E - SAMPLE T.S. PLAN

GENERAL NOTES (CONTINUED)

EXISTING SIGNAL PHASE DIAGRAM




PROPOSED SIGNAL PHASE DIAGRAM




OPERATION:
 ♂2 AND ♂3 ON VEHICLE RECALL
 ♂4 AND ♂8 ON NON-LOCK AND TIME DELAY FOR RIGHT TURNS

15. NEW VEHICLE HEADS SHALL BE 12" L.E.D. (LIGHT EMITTING DIODE) VEHICLE HEADS PER LOS ANGELES COUNTY DPW SPECIFICATIONS. (SEE SPECIAL PROVISIONS).
16. ALL NEW CURB RAMPS, LINES AND MARKINGS SHALL CONFORM TO CALTRANS STANDARD PLANS AND SPECIFICATIONS, LATEST EDITION.
17. ALL TRAFFIC LINES AND PAVEMENT MARKINGS SHOWN SHALL BE INSTALLED WITH TWO-COAT PAINT BY THE CONTRACTOR, UNLESS OTHERWISE NOTED.
18. ALL CONFLICTING LINES AND MARKINGS SHALL BE REMOVED BY WET SANDBLASTING AND INCLUDES REMOVAL OF RAISED PAVEMENT MARKERS.
19. EXACT LOCATION OF ALL SHOWN UTILITIES IS THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY.
20. THE CONTRACTOR SHALL CONTACT UNDERGROUND SERVICE ALERT BY DIALING 811 (48) HOURS PRIOR TO ANY EXCAVATION. THE CONTRACTOR IS REQUIRED TO ASCERTAIN THE EXACT LOCATION OF UNDERGROUND FACILITIES PRIOR TO DOING WORK THAT MAY DAMAGE OR INTERFERE WITH THEIR SERVICE.

GENERAL NOTES

1. TRAFFIC SIGNAL, LIGHTING, AND ELECTRICAL SHALL CONFORM TO THE LOS ANGELES COUNTY STANDARDS WHICH INCLUDE THE STANDARD PLANS FOR PUBLIC WORKS CONSTRUCTION, 2006 EDITION, STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (GREEN BOOK), 2012 EDITION, AND THE LOS ANGELES COUNTY DEPARTMENT OF PUBLIC WORKS TRAFFIC SIGNAL CONTROL EQUIPMENT SPECIFICATIONS, LATEST EDITION, UNLESS OTHERWISE NOTED ON THE PLAN OR IN THE SPECIAL PROVISIONS.
2. ALL MATERIALS AND EQUIPMENT SHALL BE FURNISHED AND INSTALLED BY THE CONTRACTOR.
3. THE GPS UNIVERSAL TIME BASE UNIT AND ANTENNA SHALL BE MOUNTED PER MANUFACTURER'S GUIDELINES. THE GPS UNIVERSAL TIME BASE UNIT ANTENNA SHALL BE LOCATED ON THE STREET SIDE OF THE TOP OF THE CONTROLLER CABINET.
4. ALL WIRING SHALL BE MARKED (TAGGED) WITHIN THE CONTROLLER CABINET FOR PHASE IDENTIFICATION.
5. ALL SIGNAL EQUIPMENT SHALL BE WIRED IN ACCORDANCE WITH THE PROPOSED SIGNAL PHASE DIAGRAM.
6. (XXXX) INDICATES LOOP ASSIGNMENT IN THE CONTROLLER CABINET. EACH LOOP ASSIGNMENT SHALL HAVE A SEPARATE LEAD-IN CABLE TO THE CONTROLLER.
7. ALL LOOPS SHALL BE CENTERED IN THE LANE AND FRONT LOOPS SHALL BE PLACED BEHIND THE EDGE OF CROSSWALK OR LIMIT LINE, UNLESS OTHERWISE NOTED.
8. ALL LOOPS SHALL BE ROUND (6" DIAMETER), UNLESS OTHERWISE NOTED.
9. TWO PAIR DLC CABLE SHALL BE USED THROUGHOUT THE EXTENT OF THIS MODIFICATION UNLESS OTHERWISE NOTED. SEE SPECIAL PROVISIONS.
10.  INDICATES BICYCLE LOOP DETECTOR. SEE BICYCLE/VEHICLE LOOP DETECTOR INSTALLATION STANDARD PLAN IN THE SPECIAL PROVISIONS.
11. ALL NEW PULL BOXES SHALL BE NO. 6 UNLESS SHOWN OTHERWISE.
12. ALL NEW UNDERGROUND CONDUIT SHALL BE SCHEDULE 80 PVC, UNLESS OTHERWISE APPROVED BY THE ENGINEER.
13. ALL EXISTING CONDUITS SHALL BE REUSED UNLESS OTHERWISE NOTED OR APPROVED BY THE ENGINEER. ALL EXISTING INDIVIDUAL CONDUCTORS AFFECTED BY THE ADDITION OF NEW CONDUCTORS AND/OR DLC'S SHALL BE REMOVED AND REPLACED WITH MULTI-CONDUCTOR CABLES UNLESS OTHERWISE NOTED OR APPROVED BY THE ENGINEER.
14. THREE-CONDUCTOR CABLE (3CSC), FIVE-CONDUCTOR CABLE (5CSC), AND TWELVE CONDUCTOR CABLE (12CSC) SHALL BE USED IN LIEU OF INDIVIDUAL CONDUCTORS AND SHALL CONFORM TO SECTION BE-2.08D OF THE CALTRANS STANDARD SPECIFICATIONS FOR CONSTRUCTION OF LOCAL STREETS AND ROADS (LATEST EDITION), UNLESS OTHERWISE SPECIFIED IN THE SPECIAL PROVISIONS. NO OTHER TRAFFIC SIGNAL (TS) MULTI-CONDUCTOR CABLE WILL BE ACCEPTED UNLESS OTHERWISE APPROVED BY THE ENGINEER.

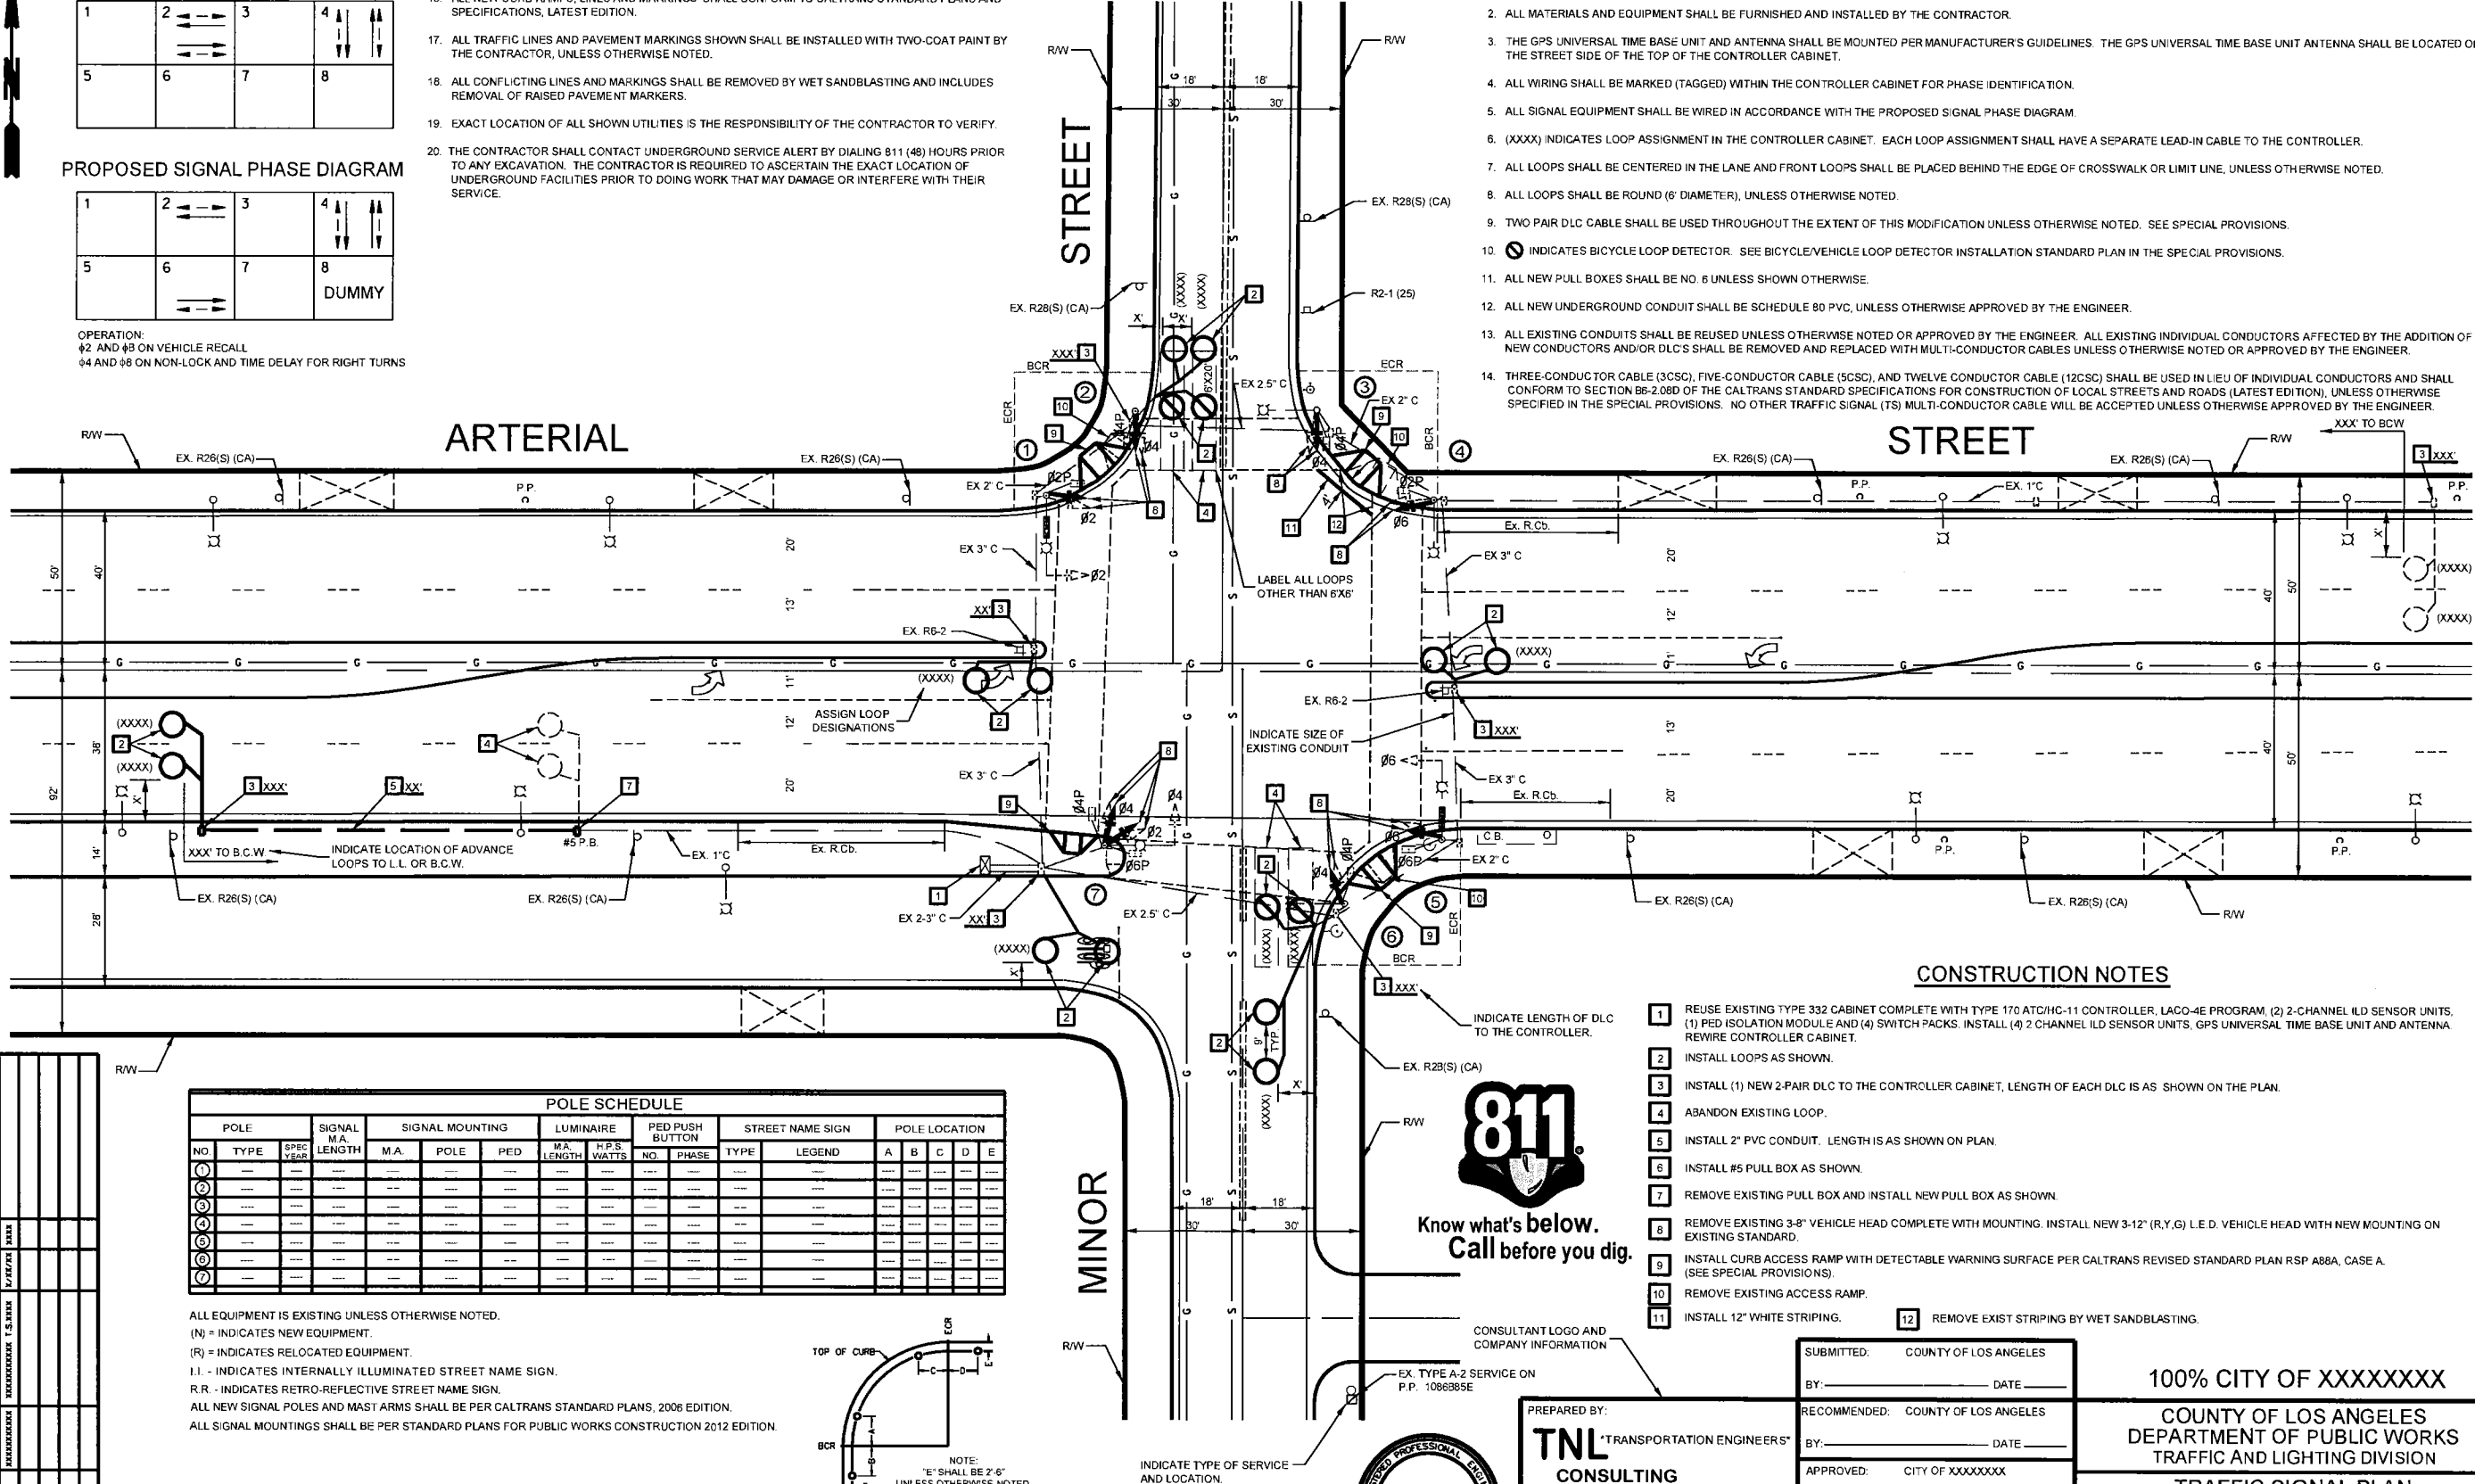


CONSTRUCTION NOTES

- 1** REUSE EXISTING TYPE 332 CABINET COMPLETE WITH TYPE 170 ATC/HC-11 CONTROLLER, IACO-4E PROGRAM, (2) 2-CHANNEL ILD SENSOR UNITS, (1) PED ISOLATION MODULE AND (4) SWITCH PACKS. INSTALL (4) 2 CHANNEL ILD SENSOR UNITS, GPS UNIVERSAL TIME BASE UNIT AND ANTENNA. REWIRE CONTROLLER CABINET.
- 2** INSTALL LOOPS AS SHOWN.
- 3** INSTALL (1) NEW 2-PAIR DLC TO THE CONTROLLER CABINET, LENGTH OF EACH DLC IS AS SHOWN ON THE PLAN.
- 4** ABANDON EXISTING LOOP.
- 5** INSTALL 2" PVC CONDUIT, LENGTH IS AS SHOWN ON PLAN.
- 6** INSTALL #5 PULL BOX AS SHOWN.
- 7** REMOVE EXISTING PULL BOX AND INSTALL NEW PULL BOX AS SHOWN.
- 8** REMOVE EXISTING 3-8" VEHICLE HEAD COMPLETE WITH MOUNTING. INSTALL NEW 3-12" (R,Y,G) I.E.D. VEHICLE HEAD WITH NEW MOUNTING ON EXISTING STANDARD.
- 9** INSTALL CURB ACCESS RAMP WITH DETECTABLE WARNING SURFACE PER CALTRANS REVISED STANDARD PLAN RSP A88A, CASE A. (SEE SPECIAL PROVISIONS).
- 10** REMOVE EXISTING ACCESS RAMP.
- 11** INSTALL 12" WHITE STRIPING.
- 12** REMOVE EXIST STRIPING BY WET SANDBLASTING.

[illegible]

ALL EQUIPMENT IS EXISTING UNLESS OTHERWISE NOTED.
(N) = INDICATES NEW EQUIPMENT.
(R) = INDICATES RELOCATED EQUIPMENT.
I.I. - INDICATES INTERNALLY ILLUMINATED STREET NAME SIGN.
R.R. - INDICATES RETRO-REFLECTIVE STREET NAME SIGN.
ALL NEW SIGNAL POLES AND MAST ARMS SHALL BE PER CALTRANS STANDARD PLANS, 2006 EDITION.
ALL SIGNAL MOUNTINGS SHALL BE PER STANDARD PLANS FOR PUBLIC WORKS CONSTRUCTION 2012 EDITION



THIS PLAN ACCURATE FOR PROPOSED WORK ONLY

T.G. XXX-XX

Know what's below.
Call before you dig.

CONSULTANT LOGO AND
COMPANY INFORMATION

2 SERVICE C



PREPARED BY:

TNL *TRANSPORTATION ENGINEER

CONSULTING

900 S. FREMONT AVE
ALHAMBRA, CA 91802-1460
(626) 300-4774 FAX (626) 300-4736
WWW.XY7.COM

XXXX XXXX	RCE NO XXXX	DAT
-----------	-------------	-----

SUBMITTED:	COUNTY OF LOS ANGELES
BY: _____	DATE _____
RECOMMENDED:	COUNTY OF LOS ANGELES
BY: _____	DATE _____
APPROVED:	CITY OF XXXXXXXX
BY: _____	DATE _____
PROJECT ID NO. TSMXXXXXXX PCA NO. XXXXXXXX	


100% CITY OF XXXXXXXXX

COUNTY OF LOS ANGELES
DEPARTMENT OF PUBLIC WORKS
TRAFFIC AND LIGHTING DIVISION



TRAFFIC SIGNAL PLAN
ARTERIAL STREET
AT
MINOR STREET

I/S X OF X	SHT X OF X	SCALE: 1" = 20'	T.S. XXXX
------------	------------	-----------------	-----------

APPENDIX E - SAMPLE G.D. PLAN

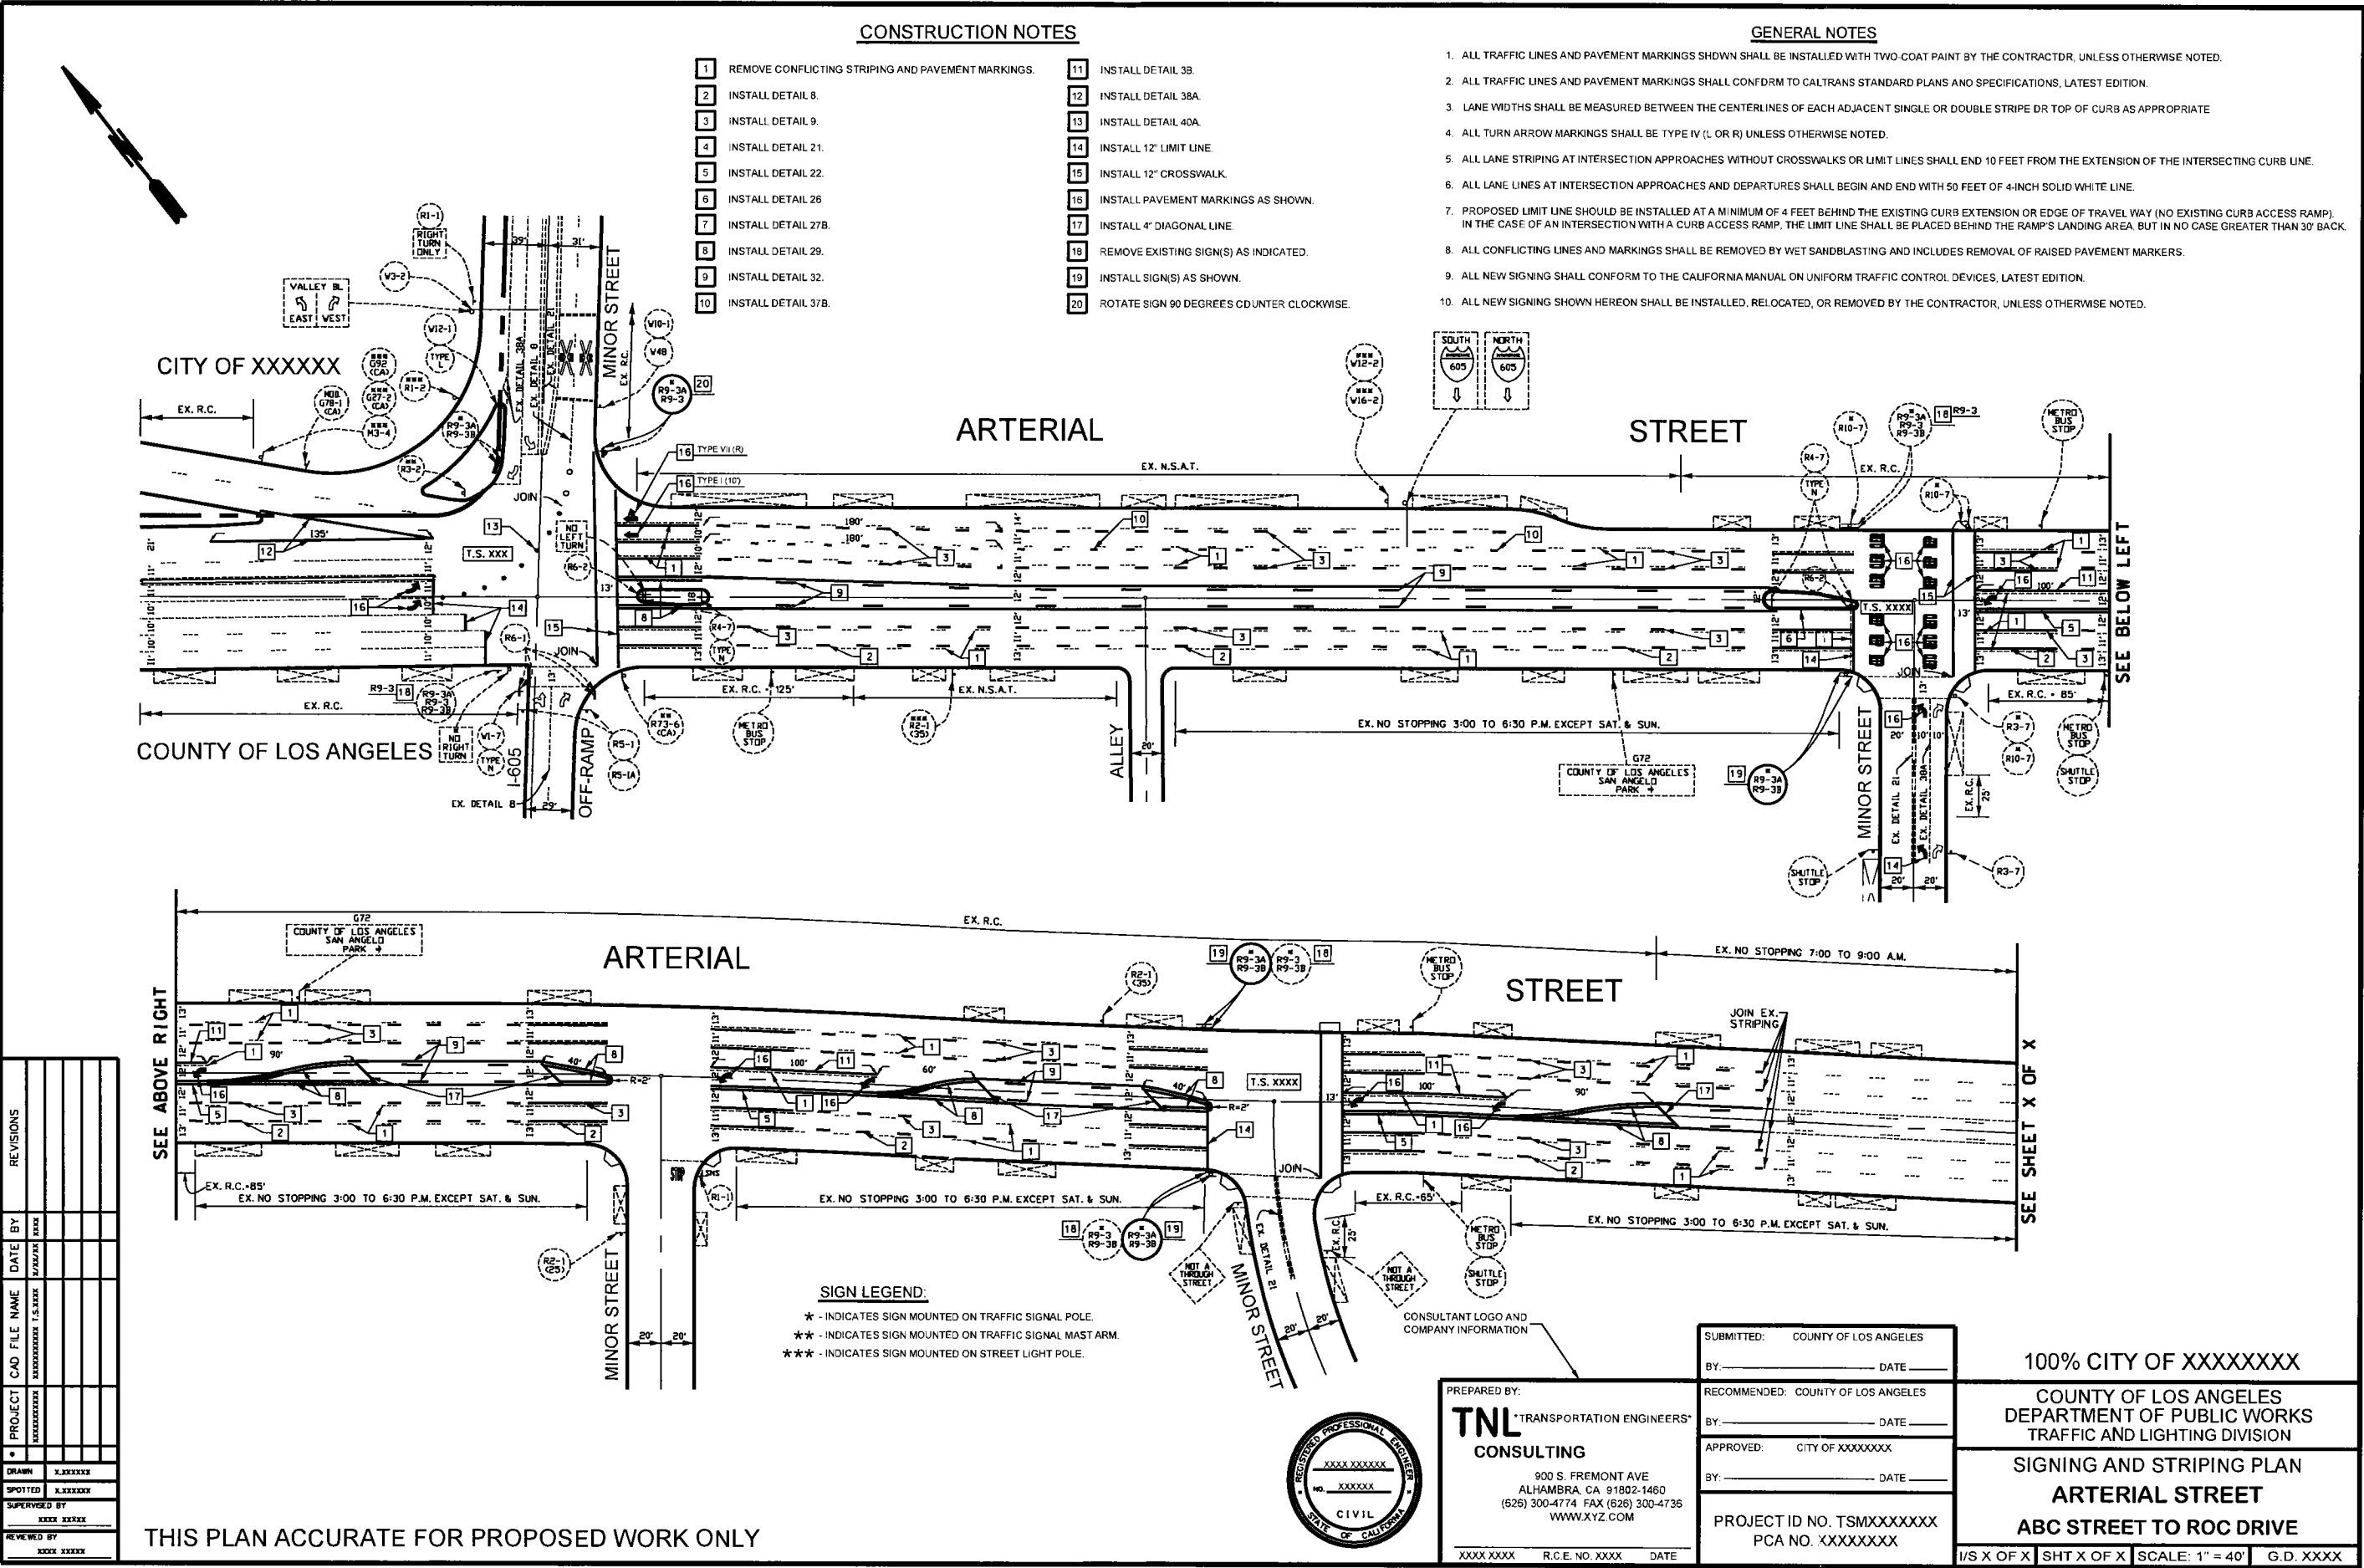

APPENDIX E - SAMPLE CLOUDING T.S. PLAN




OPERATION:
#2 AND #6 ON VEHICLE RECALL
#2 AND #6 ON PEDESTRIAN RECALL/REST IN WALK
#4 AND #8 ON NON-LOCK AND DOUBLE ENTRY

GENERAL NOTES CONTINUED:

- 15. ALL SIGNING SHOWN HEREON SHALL BE INSTALLED, REMOVED, OR RELOCATED BY THE CONTRACTOR, UNLESS OTHERWISE NOTED.
- 16. RELOCATION OF WIRELESS RADIO EQUIPMENT AND ANTENNA SHALL BE DONE BY THE AGENCY. CONTRACTOR SHALL CONTACT MR. JEFF MAGALLANES AT (626) 458-1700 TEN (10) WORKING DAYS IN ADVANCE FOR COORDINATION.


GENERAL NOTES

- 1. TRAFFIC SIGNAL AND LIGHTING SHALL CONFORM TO THE LOS ANGELES COUNTY STANDARDS WHICH INCLUDE THE STANDARD PLANS FOR PUBLIC WORKS CONSTRUCTION, 2006 EDITION, STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (GREEN BOOK), 2009 EDITION, AND THE LOS ANGELES COUNTY DEPARTMENT OF PUBLIC WORKS TRAFFIC SIGNAL CONTROL EQUIPMENT SPECIFICATIONS, LATEST EDITION, UNLESS OTHERWISE NOTED ON THE PLAN OR IN THE SPECIAL PROVISIONS.
- 2. ALL MATERIALS AND EQUIPMENT SHALL BE FURNISHED AND INSTALLED BY THE CONTRACTOR.
- 3. ALL WIRING SHALL BE MARKED (TAGGED) WITHIN THE CONTROLLER CABINET FOR PHASE IDENTIFICATION.
- 4. ALL SIGNAL EQUIPMENT SHALL BE WIRED IN ACCORDANCE WITH THE SIGNAL PHASE DIAGRAM.
- 5. (XXXX) INDICATES LOOP ASSIGNMENT IN THE CONTROLLER CABINET. EACH LOOP ASSIGNMENT SHALL HAVE A SEPARATE LEAD-IN CABLE TO THE CONTROLLER.
- 6. ALL EXISTING CONDUITS SHALL BE REUSED UNLESS OTHERWISE NOTED OR APPROVED BY THE ENGINEER. ALL EXISTING INDIVIDUAL CONDUCTORS AFFECTED BY THE ADDITION OF NEW CONDUCTORS AND/OR D.L.C.'S SHALL BE REMOVED AND REPLACED WITH MULTI-CONDUCTOR CABLES UNLESS OTHERWISE NOTED OR APPROVED BY THE ENGINEER.
- 7. NEW VEHICLE HEADS SHALL BE 12" L.E.D. (LIGHT EMITTING DIODE) VEHICLE HEADS PER LOS ANGELES COUNTY DPW SPECIFICATIONS. (SEE SPECIAL PROVISIONS)
- 8. ALL NEW UNDERGROUND CONDUIT SHALL BE SCHEDULE 80 PVC, UNLESS OTHERWISE APPROVED BY THE ENGINEER.
- 9. FOR DISPOSITION OF SALVAGED MATERIALS, SEE SPECIAL PROVISIONS.
- 10. LOOPS SHALL BE CENTERED IN THE LANE AND PLACED BEHIND THE EDGE OF THE CROSSWALK OR LIMIT LINE, UNLESS OTHERWISE NOTED.
- 11. ALL LOOPS SHALL BE ROUND (6" DIAMETER), UNLESS OTHERWISE NOTED.
- 12. ALL NEW PULL BOXES SHALL BE NO. 6 UNLESS OTHERWISE NOTED.
- 13. THREE-CONDUCTOR CABLE (3 CSC), FIVE-CONDUCTOR CABLE (5 CSC), AND TWELVE-CONDUCTOR CABLE (12 CSC) SHALL BE INSTALLED IN LIEU OF INDIVIDUAL CONDUCTORS AND SHALL CONFORM TO SECTION 86-2.08D OF THE CALTRANS STANDARD SPECIFICATIONS FOR CONSTRUCTION OF LOCAL STREETS AND ROADS, (LATEST EDITION) UNLESS OTHERWISE SPECIFIED IN THE SPECIAL PROVISIONS. NO OTHER TRAFFIC SIGNAL (TS) MULTI-CONDUCTOR CABLE WILL BE ACCEPTED UNLESS OTHERWISE APPROVED BY THE ENGINEER.
- 14. EXACT LOCATION OF ALL SHOWN UTILITIES IS THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY.

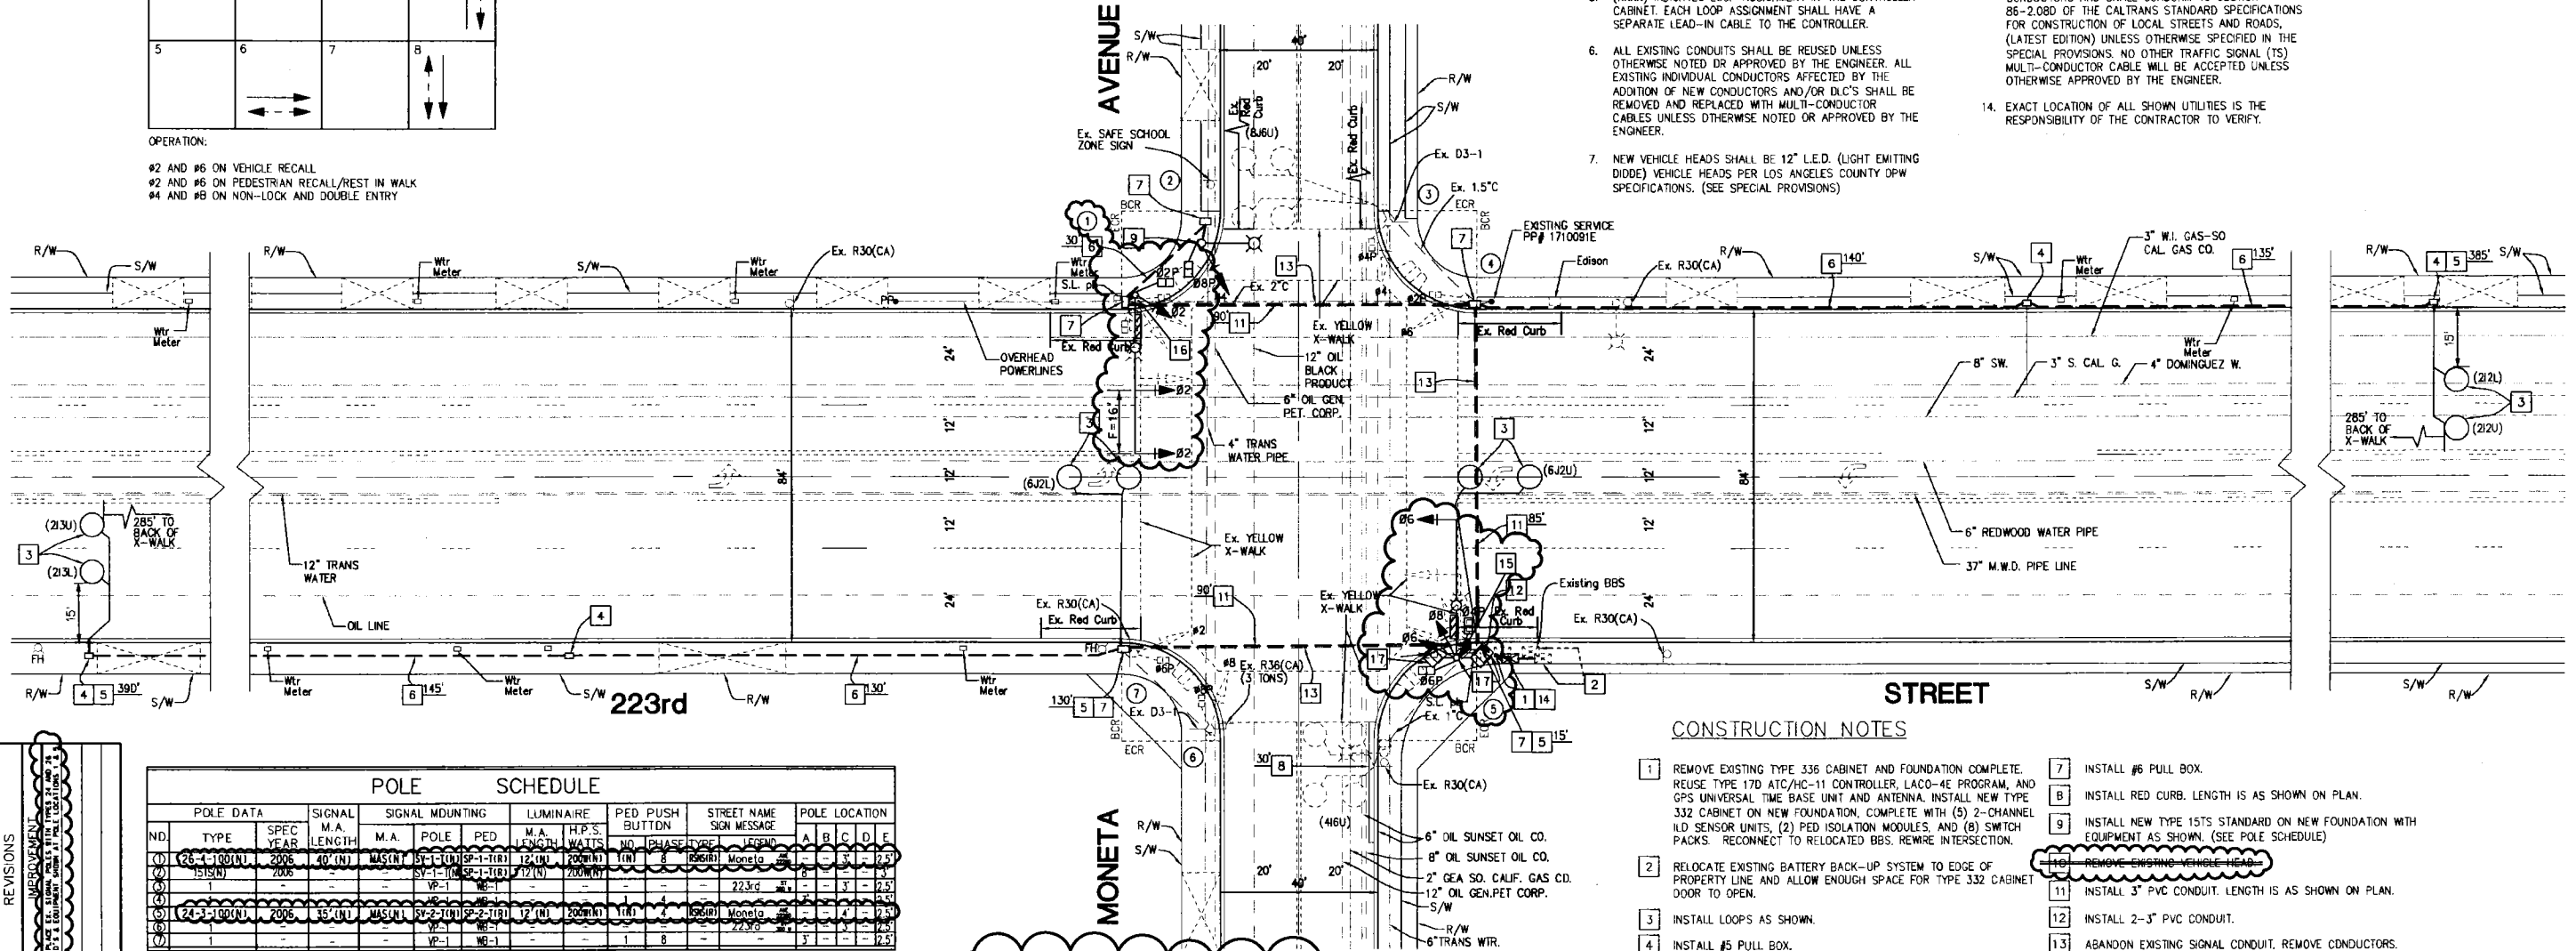

POLE SCHEDULE											
POLE DATA			SIGNAL MOUNTING			LUMINAIRE			PED. PUSH BUTTON		
NO.	TYPE	SPEC. YEAR	M.A. LENGTH	M.A. POLE	PED. LENGTH	M.A. H.P.S. LENGTH	WATTS	NO.	PHASE TYPE	MESSAGE	POLE LOCATION
1	25-1-100(U)	2006	40' (N)	MAS(N)	SP-1-TIR	12' (N)	200(W)	1	8	156(R)	Moneta
2	15(S)	2006	-	SP-1-TIR	12' (N)	200(W)	-	-	-	223rd	1
3	24-3-100(U)	2006	35' (N)	MAS(N)	SP-2-TIR	12' (N)	200(W)	1	4	156(R)	Moneta
4	1	-	-	VP-1	WG-1	-	-	1	8	223rd	1
5	1	-	-	VP-1	WG-1	-	-	1	8	223rd	1

NOTES: ALL EQUIPMENT EXISTING, UNLESS SHOWN OTHERWISE.
(N) = NEW, RSNS = REFLECTIVE STREET NAME SIGN
(R) = RELOCATED



COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS

PLAN REVISION R-1

SCALE: 1" = 20' DRAWN BY: _____

SUBMITTED: COUNTY OF LOS ANGELES

BY: _____ DATE: _____

RECOMMENDED: COUNTY OF LOS ANGELES

BY: _____ DATE: _____


APPROVED: CITY OF CARSON

BY: _____ DATE: _____

ALL ADDITIONAL WORK TO BE DONE BY THE CONTRACTOR IS SHOWN CLOUDED.

CONSTRUCTION NOTES

- 1. REMOVE EXISTING TYPE 336 CABINET AND FOUNDATION COMPLETE. REUSE TYPE 17D ATC/HC-11 CONTROLLER, LACO-4E PROGRAM, AND GPS UNIVERSAL TIME BASE UNIT AND ANTENNA. INSTALL NEW TYPE 332 CABINET ON NEW FOUNDATION, COMPLETE WITH (5) 2-CHANNEL I/O SENSOR UNITS, (2) PED ISOLATION MODULES, AND (8) SWITCH PACKS. RECONNECT TO RELOCATED BBS. REMIRE INTERSECTION.
- 2. RELOCATE EXISTING BATTERY BACK-UP SYSTEM TO EDGE OF PROPERTY LINE AND ALLOW ENOUGH SPACE FOR TYPE 332 CABINET DOOR TO OPEN.
- 3. INSTALL LOOPS AS SHOWN.
- 4. INSTALL #5 PULL BOX.
- 5. INSTALL NEW (1) 2-PAIR D.L.C. TO CONTROLLER CABINET. LENGTH OF EACH D.L.C. IS AS SHOWN ON PLAN.
- 6. INSTALL 2" PVC CONDUIT. LENGTH IS AS SHOWN ON PLAN.
- 7. INSTALL #6 PULL BOX.
- 8. INSTALL RED CURB. LENGTH IS AS SHOWN ON PLAN.
- 9. INSTALL NEW TYPE 15TS STANDARD ON NEW FOUNDATION WITH EQUIPMENT AS SHOWN. (SEE POLE SCHEDULE)
- 10. REMOVE EXISTING VEHICLE HEAD.
- 11. INSTALL 3" PVC CONDUIT. LENGTH IS AS SHOWN ON PLAN.
- 12. INSTALL 2-3" PVC CONDUIT.
- 13. ABANDON EXISTING SIGNAL CONDUIT. REMOVE CONDUCTORS.
- 14. REUSE EXISTING WIRELESS RADIO EQUIPMENT.
- 15. REMOVE EXISTING STANDARD AND FOUNDATION COMPLETE. INSTALL NEW TYPE 24 STANDARD AND FOUNDATION WITH EQUIPMENT AS SHOWN. RELOCATE EXISTING STREET NAME SIGN AND PEDESTRIAN HEADS. (SEE POLE SCHEDULE)
- 16. REMOVE EXISTING STANDARD AND FOUNDATION COMPLETE. INSTALL NEW TYPE 26 STANDARD AND FOUNDATION WITH EQUIPMENT AS SHOWN. RELOCATE EXISTING STREET NAME SIGN AND PEDESTRIAN HEADS. (SEE POLE SCHEDULE)
- 17. RELOCATE EXISTING WIRELESS RADIO ANTENNA TO NEW POLE. (SEE GENERAL NOTE 17)



100% CITY OF CARSON

REVISIONS	DATE	PROJECT CADD PARTNAME
1	6/12	223RD ST
2	6/12	223RD ST
3	6/12	223RD ST
4	6/12	223RD ST
5	6/12	223RD ST
6	6/12	223RD ST
7	6/12	223RD ST
8	6/12	223RD ST
9	6/12	223RD ST
10	6/12	223RD ST
11	6/12	223RD ST
12	6/12	223RD ST
13	6/12	223RD ST
14	6/12	223RD ST
15	6/12	223RD ST
16	6/12	223RD ST
17	6/12	223RD ST
18	6/12	223RD ST
19	6/12	223RD ST
20	6/12	223RD ST

Underground Service Alert
DIG ALERT
Call: TOLL FREE
1-800
227-2600

100 WORKING DAYS BEFORE YOU DIG

THIS PLAN ACCURATE FOR PROPOSED WORK ONLY.

PLANS PREPARED BY: **VA Consulting, Inc.**
ENGINEERS PLANNERS SURVEYORS
6400 DAK CANYON, SUITE 150
IRVINE, CA 92618 (949) 474-1400

UNDER THE SUPERVISION OF: **MOHAMMAD R. HEIAT**
R.C.E. 45776 DATE: 12/3/10

REVIEWED: COUNTY OF LOS ANGELES
BY: **Joy Krejci** DATE: 12/8/10
APPROVED: **City of Carson**
BY: **M. V. ...** DATE: 1/14/11

PROJECT ID TSM0010084
PROJECT NO. X7401038

COUNTY OF LOS ANGELES
DEPARTMENT OF PUBLIC WORKS
TRAFFIC AND LIGHTING DIVISION

TRAFFIC SIGNAL PLAN
**223RD STREET
AT MONETA AVENUE**

1/5 NO. 8 OF 21 SHT. 5 OF 15 SCALE: 1" = 20' T.S. 5548 (R-1)

ADDITIONAL PHOTOS

CABINET LOCATION


SERVICE LOCATION

BATTERY BACKUP CABINET LOCATION

FRONT OF CONTROLLER EQUIPMENT

BACK OF CONTROLLER EQUIPMENT

APPENDIX F

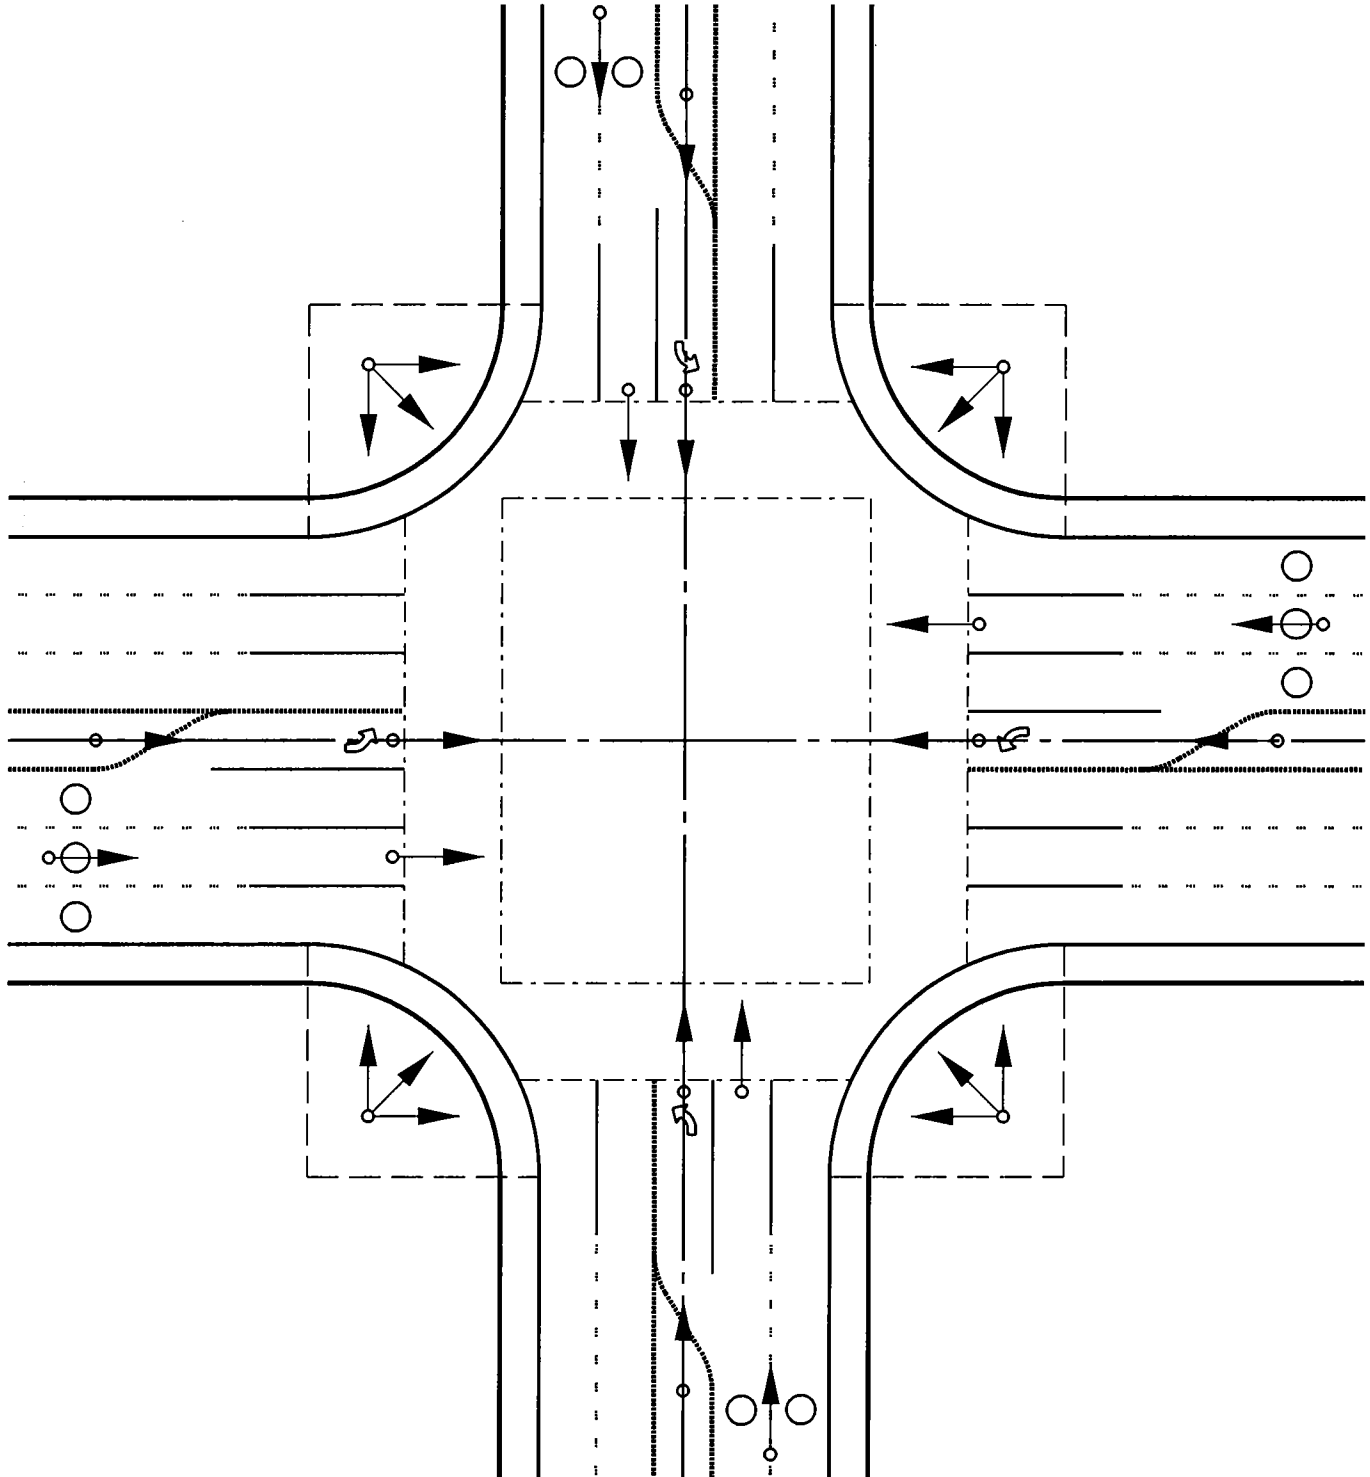

←○ INDICATES PHOTO LOCATION
& DIRECTION OF PHOTO

APPENDIX G

County Traffic Signal Signature Blocks

NEW TRAFFIC SIGNAL

Original Traffic Signal Plan is Created.

1

SUBMITTED:	CIVIL ENGINEER NO. CXXXXX
BY: <u>Associate Civil Engineer</u>	DATE: _____
RECOMMENDED:	
BY: <u>Senior Civil Engineer</u>	DATE: _____
APPROVED: GAIL FARBER, DIRECTOR OF PUBLIC WORKS	
BY: <u>Division Head</u>	DATE: _____
ASSISTANT DEPUTY DIRECTOR	

Plan is done by **COUNTY STAFF**

Additional City Signature "Approved" Blocks May Be Required

2

REVIEWED:	
BY: <u>Associate Civil Engineer</u>	DATE: _____
RECOMMENDED:	
BY: <u>Senior Civil Engineer</u>	DATE: _____
APPROVED: GAIL FARBER, DIRECTOR OF PUBLIC WORKS	
BY: <u>Division Head</u>	DATE: _____
ASSISTANT DEPUTY DIRECTOR	

Plan is done by a **CONSULTANT**

Additional City Signature "Approved" Blocks May Be Required

MODIFICATION TO AN EXISTING TRAFFIC SIGNAL

Proposed Work is Drawn on a New Traffic Signal Plan.

3

SUBMITTED:	
BY: <u>Associate Civil Engineer</u>	DATE: _____
RECOMMENDED:	
BY: <u>Senior Civil Engineer</u>	DATE: _____
APPROVED: GAIL FARBER, DIRECTOR OF PUBLIC WORKS	
BY: <u>Division Head</u>	DATE: _____
ASSISTANT DEPUTY DIRECTOR	

Plan is done by **COUNTY STAFF**
100% COUNTY Jurisdiction

4

REVIEWED:	
BY: <u>Associate Civil Engineer</u>	DATE: _____
RECOMMENDED:	
BY: <u>Senior Civil Engineer</u>	DATE: _____
APPROVED: GAIL FARBER, DIRECTOR OF PUBLIC WORKS	
BY: <u>Division Head</u>	DATE: _____
ASSISTANT DEPUTY DIRECTOR	

Plan is done by a **CONSULTANT**
100% COUNTY Jurisdiction

APPENDIX G

County Traffic Signal Signature Blocks (Continued)

MODIFICATION TO AN EXISTING TRAFFIC SIGNAL (CONTINUED)

Proposed Work is Drawn on a New Traffic Signal Plan.

5

SUBMITTED:	COUNTY OF LOS ANGELES
BY:	Associate Civil Engineer _____ DATE: _____
RECOMMENDED:	COUNTY OF LOS ANGELES
BY:	Senior Civil Engineer _____ DATE: _____
APPROVED:	CITY OF EL SEGUNDO
BY:	City Signature _____ DATE: _____
PROJECT ID NO. TSMXXXXXXX PCA NO. XXXXXXXX	

Plan is done by **COUNTY STAFF**
100% CITY Jurisdiction

6

SUBMITTED:	COUNTY OF LOS ANGELES
BY:	Associate Civil Engineer _____ DATE: _____
RECOMMENDED:	COUNTY OF LOS ANGELES
BY:	Senior Civil Engineer _____ DATE: _____
APPROVED:	GAIL FARBER, DIRECTOR OF PUBLIC WORKS
BY:	Division Head _____ DATE: _____ ASSISTANT DEPUTY DIRECTOR
APPROVED:	CITY OF HAWTHORNE
BY:	City Signature _____ DATE: _____
PROJECT ID NO. TSMXXXXXXX PCA NO. XXXXXXXX	

MAJOR Work is Proposed*

Plan is done by **COUNTY STAFF**
COUNTY has a percent of Jurisdiction

Additional City Signature "Approved" Blocks May Be Required

*NOTE: If only minor work is being done (signing, vehicle heads, loops, conduit/pull boxes), use signature block 6a.

6a

SUBMITTED:	COUNTY OF LOS ANGELES
BY:	Associate Civil Engineer _____ DATE: _____
APPROVED:	COUNTY OF LOS ANGELES
BY:	Senior Civil Engineer _____ DATE: _____
APPROVED:	CITY OF HAWTHORNE
BY:	City Signature _____ DATE: _____
PROJECT ID NO. TSMXXXXXXX PCA NO. XXXXXXXX	

MINOR Work is Proposed*

Plan is done by **COUNTY STAFF**
COUNTY has a percent of Jurisdiction

Additional City Signature "Approved" Blocks May Be Required

*NOTE: Signing, vehicle heads, loops, and conduit/pull boxes. For major work, use signature block 6.

APPENDIX G

County Traffic Signal Signature Blocks (Continued)

MODIFICATION TO AN EXISTING TRAFFIC SIGNAL (CONTINUED)

Proposed Work is Drawn on a New Traffic Signal Plan.

7

REVIEWED:	COUNTY OF LOS ANGELES
BY:	<u>Associate Civil Engineer</u> DATE: _____
RECOMMENDED:	COUNTY OF LOS ANGELES
BY:	<u>Senior Civil Engineer</u> DATE: _____
APPROVED:	GAIL FARBER, DIRECTOR OF PUBLIC WORKS
BY:	<u>Division Head</u> DATE: _____ ASSISTANT DEPUTY DIRECTOR
APPROVED:	CITY OF LAWDALE
BY:	<u>City Signature</u> DATE: _____
PROJECT ID NO. TSMXXXXXXX PCA NO. XXXXXXXX	

MAJOR Work is Proposed*

Plan is done by a
CONSULTANT/CITY
COUNTY has a percent of Jurisdiction

Additional City Signature "Approved" Blocks May Be Required

*NOTE: If only minor work is being done (signing, vehicle heads, loops, conduit/pull boxes), use signature block 7a.

7a

REVIEWED:	COUNTY OF LOS ANGELES
BY:	<u>Associate Civil Engineer</u> DATE: _____
APPROVED:	COUNTY OF LOS ANGELES
BY:	<u>Senior Civil Engineer</u> DATE: _____
APPROVED:	CITY OF CALABASAS
BY:	<u>City Signature</u> DATE: _____
PROJECT ID NO. TSMXXXXXXX PCA NO. XXXXXXXX	

MINOR Work is Proposed*

Plan is done by a
CONSULTANT/CITY
COUNTY has a percent of Jurisdiction

Additional City Signature "Approved" Blocks May Be Required

*NOTE: Signing, vehicle heads, loops, and conduit/pull boxes. For major work, use signature block 7.

8

REVIEWED:	COUNTY OF LOS ANGELES
BY:	<u>Associate Civil Engineer</u> DATE: _____
APPROVED:	CITY OF INDUSTRY
BY:	<u>City Signature</u> DATE: _____
PROJECT ID NO. TSMXXXXXXX PCA NO. XXXXXXXX	

Plan is done by a
CONSULTANT/CITY
100% CITY Jurisdiction

Additional City Signature "Approved" Blocks May Be Required

NOTE: All plans reviewed by the County, regardless of the requestor, shall be signed by the County, as shown.

APPENDIX G

County Traffic Signal Signature Blocks (Continued)

MODIFICATION TO AN EXISTING TRAFFIC SIGNAL

Clouding of Proposed Work on an Existing Traffic Signal Plan.

9

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS	
PLAN REVISION R-X	
SCALE: 1"=20"	DRAWN BY:
SUBMITTED:	
BY: <u>Associate Civil Engineer</u>	DATE: _____
APPROVED:	
BY: <u>Senior Civil Engineer</u>	DATE: _____
ALL WORK TO BE DONE BY THE CONTRACTOR IS SHOWN CLOUDED. ALL OTHER WORK SHALL BE EXCLUDED.	

Clouding is done by

COUNTY STAFF

100% COUNTY Jurisdiction

Additional City Signature "Approved" Blocks May Be
Required

10

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS	
PROJECT ID NO. TSMXXXXXXX PCA NO. XXXXXXXX	
SCALE: 1"=20"	DRAWN BY:
REVIEWED:	
BY: <u>Associate Civil Engineer</u>	DATE: _____
APPROVED:	
BY: <u>Senior Civil Engineer</u>	DATE: _____
ALL WORK TO BE DONE BY THE CONTRACTOR IS SHOWN CLOUDED. ALL OTHER WORK SHALL BE EXCLUDED.	

Clouding is done by a

CONSULTANT

100% COUNTY Jurisdiction

Consultant shall put their own signature block
and stamp on the plan, which shall be clouded.

Additional City Signature "Approved" Blocks May Be
Required

11

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS	
PLAN REVISION R-X	
SCALE: 1"=20"	DRAWN BY:
SUBMITTED: COUNTY OF LOS ANGELES	
BY: <u>Associate Civil Engineer</u>	DATE: _____
RECOMMENDED: COUNTY OF LOS ANGELES	
BY: <u>Senior Civil Engineer</u>	DATE: _____
APPROVED: CITY OF COMPTON	
BY: <u>City Signature</u>	DATE: _____
ALL WORK TO BE DONE BY THE CONTRACTOR IS SHOWN CLOUDED. ALL OTHER WORK SHALL BE EXCLUDED.	

Clouding is done by

COUNTY STAFF

100% CITY Jurisdiction

APPENDIX G

County Traffic Signal Signature Blocks (Continued)

MODIFICATION TO AN EXISTING TRAFFIC SIGNAL (CONTINUED)

Clouding of Proposed Work on an Existing Traffic Signal Plan.

12

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS	
PLAN REVISION R-X	
SCALE: 1"=20"	DRAWN BY:
SUBMITTED: COUNTY OF LOS ANGELES	
BY: Associate Civil Engineer	DATE:
APPROVED: COUNTY OF LOS ANGELES	
BY: Senior Civil Engineer	DATE:
APPROVED: CITY OF COMPTON	
BY: City Signature	DATE:
ALL WORK TO BE DONE BY THE CONTRACTOR IS SHOWN CLOUDED. ALL OTHER WORK SHALL BE EXCLUDED.	

Clouding is done by
COUNTY STAFF
COUNTY has a percent of Jurisdiction

Additional City Signature "Approved" Blocks May Be Required

13

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS	
PROJECT ID NO. TSMXXXXXXX PCA NO. XXXXXXXX	
SCALE: 1"=20"	DRAWN BY:
REVIEWED: COUNTY OF LOS ANGELES	
BY: Associate Civil Engineer	DATE:
APPROVED: COUNTY OF LOS ANGELES	
BY: Senior Civil Engineer	DATE:
APPROVED: CITY OF LAWDALE	
BY: City Signature	DATE:
ALL WORK TO BE DONE BY THE CONTRACTOR IS SHOWN CLOUDED. ALL OTHER WORK SHALL BE EXCLUDED.	

Clouding is done by a
CONSULTANT/CITY
COUNTY has a percent of Jurisdiction

Consultant shall put their own signature block and stamp on the plan, which shall be clouded.

Additional City Signature "Approved" Blocks May Be Required

14

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS	
PROJECT ID NO. TSMXXXXXXX PCA NO. XXXXXXXX	
SCALE: 1"=20"	DRAWN BY:
REVIEWED: COUNTY OF LOS ANGELES	
BY: Associate Civil Engineer	DATE:
APPROVED: CITY OF WEST COVINA	
BY: City Signature	DATE:
ALL WORK TO BE DONE BY THE CONTRACTOR IS SHOWN CLOUDED. ALL OTHER WORK SHALL BE EXCLUDED.	

Clouding is done by a
CONSULTANT/CITY
100% CITY Jurisdiction

Additional City Signature "Approved" Blocks May Be Required

Consultant shall put their own signature block and stamp on the plan, which shall be clouded.

NOTE: All plans reviewed by the County, regardless of the requestor, shall be signed by the County, as shown.

APPENDIX G

County Traffic Signal Signature Blocks (Continued)

MODIFICATION TO AN EXISTING TRAFFIC SIGNAL

Clouding of Proposed Work on an Existing Traffic Signal Plan.

NOTE: The following signature blocks are for use by **COUNTY STAFF ONLY**

15

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS	
EXTRAORDINARY MAINTENANCE	
SCALE: 1"=20"	DRAWN BY: _____
SUBMITTED: COUNTY OF LOS ANGELES	
BY: <u>Associate Civil Engineer</u>	DATE: _____
APPROVED: COUNTY OF LOS ANGELES	
BY: <u>Senior Civil Engineer</u>	DATE: _____

EXTRAORDINARY MAINTENANCE

Additional City Signature "Approved" Blocks May Be
Required

16

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS	
FORCE ACCOUNT	
SCALE: 1"=20"	DRAWN BY: _____
SUBMITTED: COUNTY OF LOS ANGELES	
BY: <u>Associate Civil Engineer</u>	DATE: _____
APPROVED: COUNTY OF LOS ANGELES	
BY: <u>Senior Civil Engineer</u>	DATE: _____

FORCE ACCOUNT

Additional City Signature "Approved" Blocks May Be
Required

APPENDIX H

POLE SCHEDULE																	
POLE			SIGNAL M.A. LENGTH	SIGNAL MOUNTING			LUMINAIRE		PED PUSH BUTTON		STREET NAME SIGN		POLE LOCATION				
NO.	TYPE	SPEC YEAR		M.A.	POLE	PED	M.A. LENGTH	H.P.S. WATTS	NO.	PHASE	TYPE	LEGEND	A	B	C	D	E
①	26-4-100(N)	2006	45'(N)	MAS(N)	SV-2-T(N)	SP-1-T(N)	15'(N)	250(N)	1(N)	8	R.R.(N)	MARINE AV.	----	----	10'	----	4'
②	15TS(N)	2006	----	----	SV-1-T(N)	SP-1-T(N)	12'(N)	250(N)	1(N)	2	----	----	14'	----	----	----	----
③	26-4-70	----	40'	2-MAS	SV-1-T	SP-1-T	12'	250	1	2	I.I.	AVIATION BL.	----	----	17'	----	4'
④	1A	----	----	----	TV-2-T	SP-1-T	----	----	1	4	----	----	15'	----	----	----	----
⑤	26-4-100(N)	2006	45'(N)	2-MAS(N)	SV-2-T(N)/ SV-1-T(N)	SP-1-T(N)	15'(N)	250(N)	1(N)	4	R.R.(R)	MARINE AV.	----	----	8'	----	3'
⑥	1A	----	----	----	TV-1-T	SP-1-T	----	----	1	6	----	----	4.5'	----	----	----	----
⑦	24-3-70	----	35'	2-MAS	SV-1-T	SP-1-T	12'	250	1	6	I.I.	AVIATION BL.	----	----	EX.	----	----
⑧	1A	----	----	----	TV-1-T	SP-1-T	----	----	1	8	----	----	2'	----	----	----	----

ALL EQUIPMENT SHOWN IS EXISTING UNLESS OTHERWISE NOTED.

(N) - DENOTES NEW EQUIPMENT.

(R) - DENOTES RELOCATED EQUIPMENT.

I.I. - INDICATES INTERNALLY ILLUMINATED STREET NAME SIGN

R.R. - INDICATES RETRO-REFLECTIVE STREET NAME SIGN

ALL NEW SIGNAL POLES AND MAST ARMS SHALL BE PER CALTRANS STANDARD PLANS, 2006 EDITION.

ALL SIGNAL MOUNTINGS SHALL BE PER STANDARD PLANS FOR PUBLIC WORKS CONSTRUCTION 2012 EDITION.