



GAIL FARBER, Director

# COUNTY OF LOS ANGELES

## DEPARTMENT OF PUBLIC WORKS

*"To Enrich Lives Through Effective and Caring Service"*

900 SOUTH FREMONT AVENUE  
ALHAMBRA, CALIFORNIA 91803-1331  
Telephone: (626) 458-5100  
<http://dpw.lacounty.gov>

ADDRESS ALL CORRESPONDENCE TO:  
P.O. BOX 1460  
ALHAMBRA, CALIFORNIA 91802-1460

April 19, 2012

IN REPLY PLEASE

REFER TO FILE:

SM-1

Current Property Owner  
1234 Spring Creek Road  
Rancho Palos Verdes, CA 90275

Dear Property Owner:

### **SEWER LATERAL ROOT INTRUSION 1234 SPRING CREEK ROAD, RANCHO PALOS VERDES, CALIFORNIA 90275**

As the agency responsible for the maintenance of the sanitary sewer system in your area, the County of Los Angeles Consolidated Sewer Maintenance District (District) is providing you with this courtesy notice informing you that the sewer lateral serving the property located at 1234 Spring Creek Road, Rancho Palos Verdes, California 90275, requires maintenance per **County Code 20.24.080 Maintenance of Sewer Laterals.**

***"All house laterals, industrial connection sewers, septic tank outlet connections to STEP system, and appurtenances thereto existing as of January 23, 1953, or thereafter constructed, shall be maintained by the owner of the property served in a safe and sanitary condition, and all devices or safeguards which are required by this Division 2 for the operation thereof shall be maintained in good working order."***

Using closed-circuit television (CCTV) camera technology, the District recently televised the sanitary sewer mainline and discovered the presence of roots in your sewer lateral connection. The intrusion of the roots from your lateral may block the flow of sewage in the mainline sewer causing a sanitary sewer overflow upstream of your property.

Since the CCTV inspection, the sewer mainline has been cleaned and blockages from root growth have been removed; however, the root blockage in your sewer lateral is still present. As the property owner, you are responsible for the entire length of the sewer lateral, which includes the portion that extends beyond the property line into the public right of way. We request that you contact a qualified plumbing contractor to service your sewer lateral within 90 days to remove roots and any other obstructions that may cause a sewage backup.

Current Property Owner  
April 19, 2012  
Page 2

Prior to your plumbing contractor servicing your lateral, please notify the District's sewer maintenance yard in your area at (323) 233-3330 to arrange for authorization to access the downstream manhole.

During your lateral service, your plumbing contractor must protect the District's sewer mainlines from dislodged roots and other debris by utilizing catcher baskets at the manhole downstream from your lateral connection.

After your lateral has been serviced, please notify Mr. Fernando Villaluna, Sewer Maintenance Division, at (626) 300-3380 or [fvillaluna@dpw.lacounty.gov](mailto:fvillaluna@dpw.lacounty.gov).

For your reference, we have enclosed photos of your lateral connection showing the presence of the root blockage. Also enclosed are some literature on ways of minimizing sewer overflows and damage to your home.

Thank you for helping the Department of Public Works keep the public's sewers clean and in good working order.

Very truly yours,

GAIL FARBER  
Director of Public Works

KEITH E. LEHTO  
Assistant Deputy Director  
Sewer Maintenance Division

HK:gy

Enc.


1234 SPRING CREEK ROAD  
RANCHO PALOS VERDES, CA 90275  
Roots at Lateral Connection



## Minimizing Sewer Overflows and Damage to Your Home

The sewer system within the County of Los Angeles Consolidated Sewer Maintenance District (District) is comprised of a series of underground pipes. Many are publicly owned; however, the sewer laterals are entirely owned by the private property owner they serve. The laterals extend from the building to the mainline within the street (or within an easement at the rear of your home). The laterals are typically four inches in diameter while the District's mainline is typically at least eight inches in diameter. The private property owner is responsible for the entire length of the lateral, which includes the portion that may be located within the public right of way (under the asphalt and street landscaping).

### SEWER LATERALS – AREAS OF RESPONSIBILITY

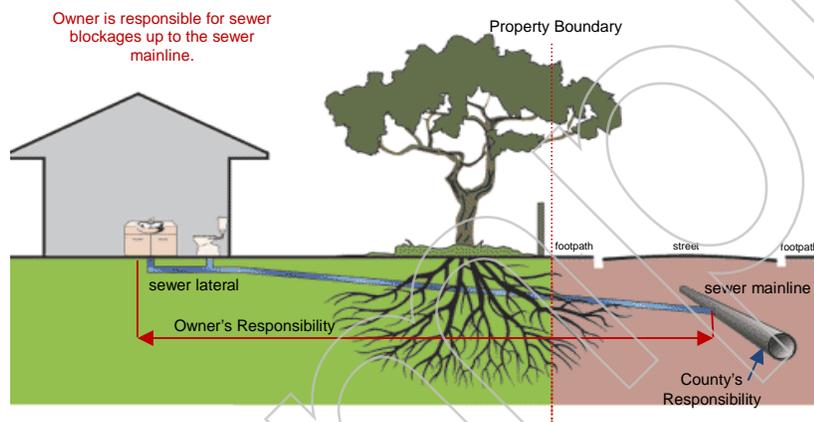

Sewer backups can cause tremendous damage to the interior of a home. In order to minimize these, the District provides continual maintenance services for the public sewer mainlines.

Unfortunately, sewer laterals are often not maintained by private property owners until a disaster strikes. "Out of sight, out of mind" is a typical approach to sewer lateral maintenance and operation by many. It is our hope that we can provide you various means of addressing these issues and thus minimize your risk of an overflow entering your home.

The three methods we suggest are:

1. Maintain your lateral through proper cleaning, repair, and replacement
2. Do not place improper items into the sewer or make improper connections to the sewer
  - a. Keep rainwater out of the sewer lines as it overwhelms the capacity of the sewer lines and may cause sewer spills.
  - b. Do not pour fats, oils, and grease in your drains as these products harden and stick to the inside of the sewer pipes, which build up and may eventually cause a blockage in the sewer pipe.
3. Install a backflow preventer and cleanout in your sewer lateral.