
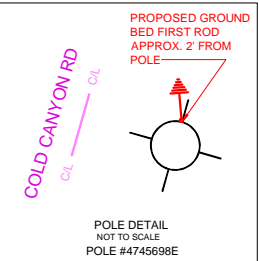
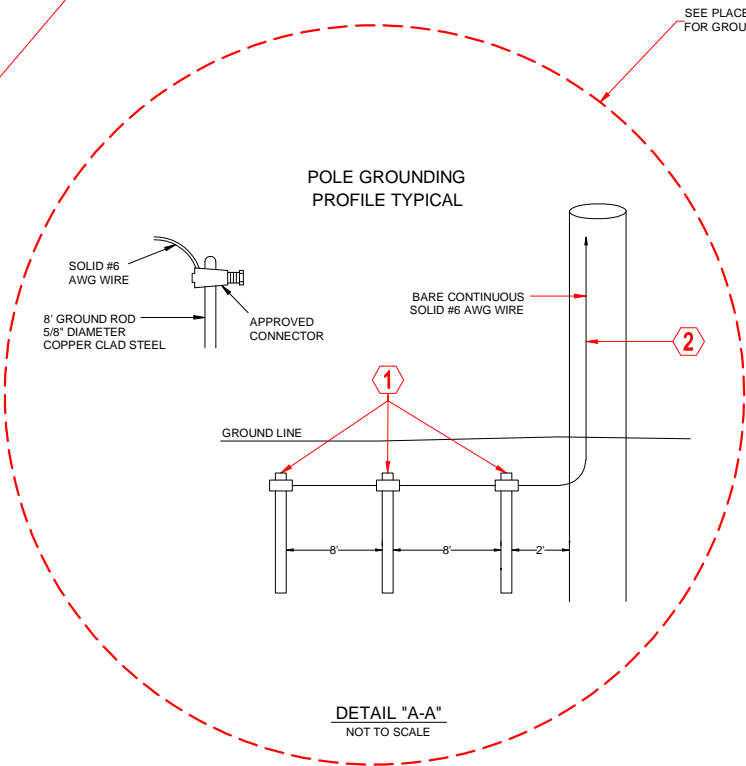


PLACEMENT DATA

- ① PL. 18 TR FT. # 6 GROUND WIRE
INSTALL 3 COPPER GROUND RODS
5/8" DIAMETER, 8' MINIMUM LENGTH
NO PM - PROTECTION PRECAUTION
POLE# 4745698E
R/C 22C
- ② PL. 32' # 6 GROUND WIRE
POLE# 4745698E
R/C 22C

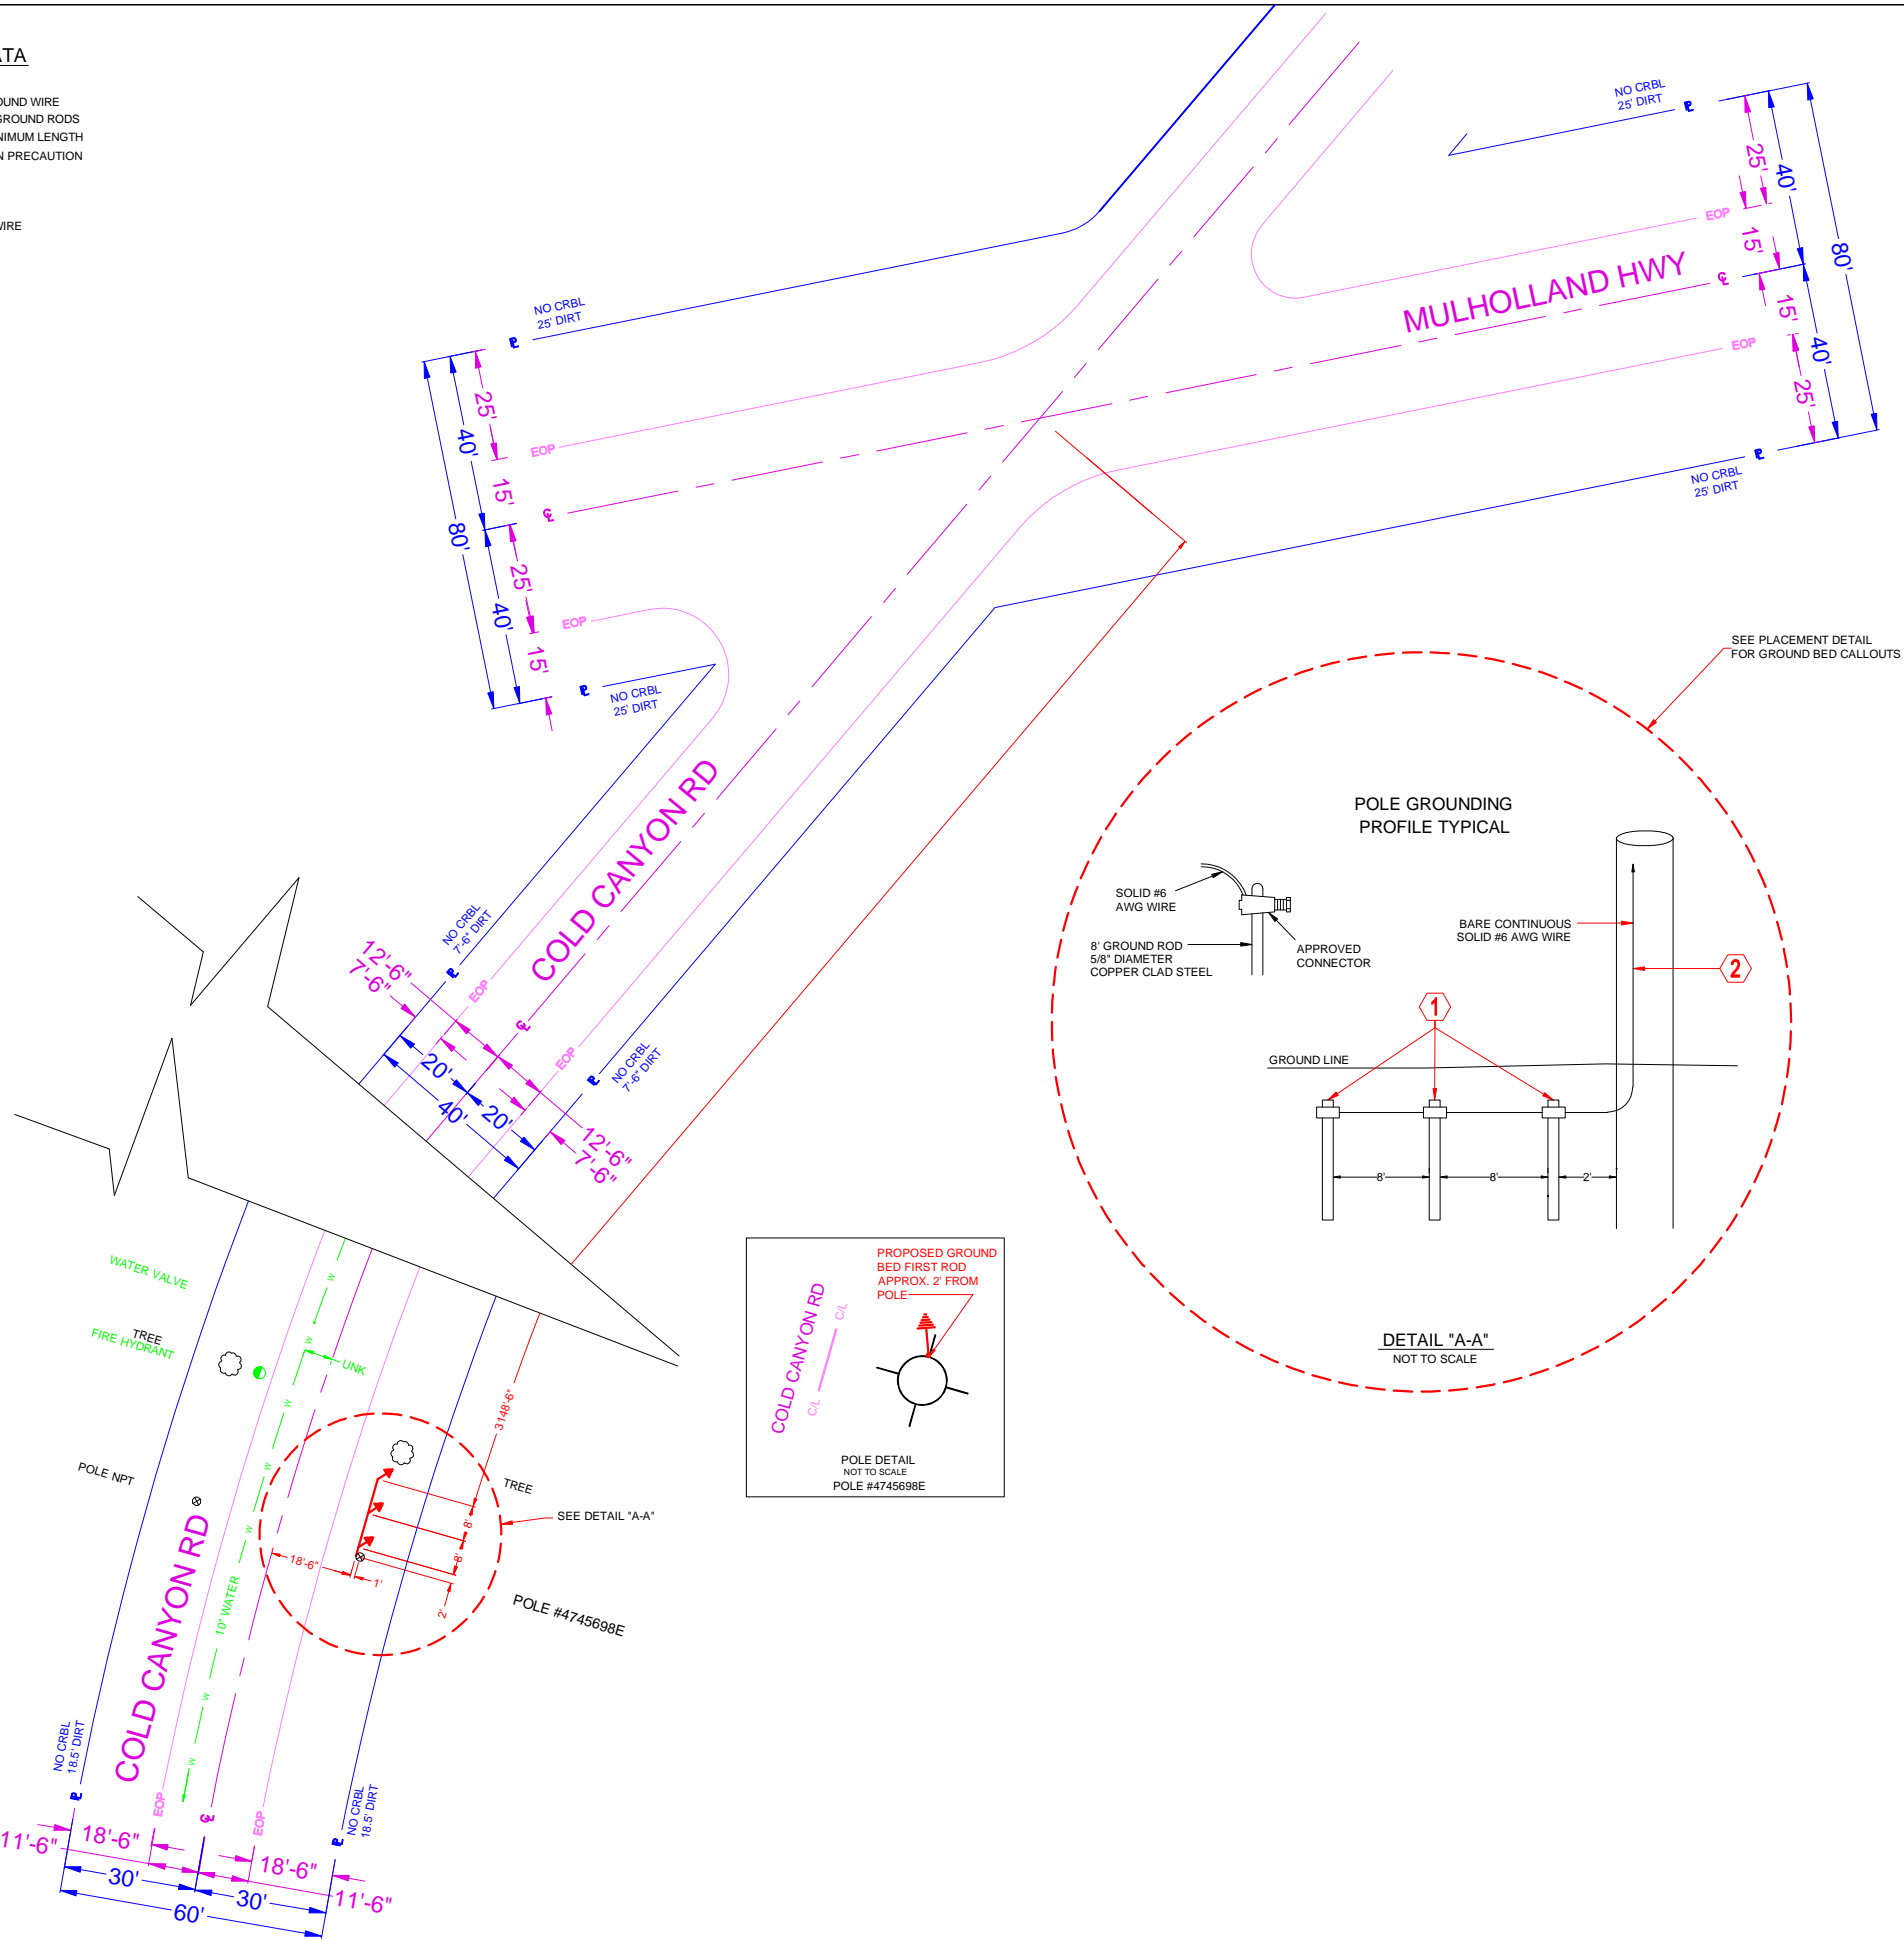

CONSTRUCTION REQUIREMENTS

1. MAINTAIN MINIMUM COVER OF 36" BELOW FLOW LINE.
2. VERIFY EXISTING SUBSTRUCTURES PRIOR TO EXCAVATION.
3. ALL 4" TO CONFORM TO PTS.-77 OR EQUIVALENT.
4. ALL 2" TO CONFORM TO PTS.-66 OR EQUIVALENT.
5. ALL BACKFILL TO BE SAND 12" BELOW AND 6" ABOVE.
6. DO NOT BACKFILL OVER ANY TELEPHONE BURIED SPLICE LOCATIONS UNTIL AUTHORIZED BY TELEPHONE COMPANY INSPECTOR.
7. PLACE # 6 TINNED GROUND WIRE AT BONDING POINTS. (SEE BONDING DETAIL)
8. PLACE PULL ROPE IN NEW CONDUIT.
9. DO NOT CUT CURB & GUTTER.
10. ALL SURFACES AND LANDSCAPES WHICH HAVE BEEN REMOVED OR DAMAGED IN THE COURSE OF CONSTRUCTION SHALL BE RECONSTRUCTED OR REPLACED TO AT LEAST EQUAL OR BETTER THAN THE PREVIOUS OR ADJACENT SURFACE.
11. ALL TRAFFIC CONTROL TO BE IN ACCORDANCE WITH THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) LATEST EDITION.
12. PER AT&T GUIDELINES, ALL HANDHOLES, SPLICE BOXES, AND MANHOLES TO BE PURCHASED FROM EITHER NEWBASE OR UTILITY VAULT.

THIS PROJECT REQUIRES EXCAVATION. CONSTRUCTION WILL UTILIZE AND IMPLEMENT ALL BEST MANAGEMENT PRACTICES (BMP's) AS REQUIRED TO ENSURE COMPLIANCE WITH AT&T POLICY LETTER ISSUE FEBRUARY 21, 2003 BY ENVIRONMENTAL MANAGEMENT CONCERNING STORM WATER PERMITTING AND STORM WATER POLLUTION PREVENTION PLANS (SWPPP's) AND IN ACCORDANCE WITH THE CLEAN WATER ACT (1965) AND EPA REGULATIONS PUBLISHED IN 1990 AS MODIFIED BY THE PHASE II RULE IN 1990.

LOCATION:
COLD CANYON RD, E/S OF STREET, 3166'-6" S/O C/L OF MULHOLLAND HWY.

DESCRIPTION:
PLACE GROUND BED AND 32' OF BARE # 6 GROUND WIRE AT POLE #4745698E.

BACKFILL SHALL BE PER COUNTY OF LOS ANGELES STANDARDS

STREET TYPE	SOIL CLASS	PROPOSED BACKFILL
MAJOR	N/A	N/A
SECONDARY	N/A	N/A
LOCAL	N/A	N/A
ALLEY	N/A	N/A

CONDUIT RECORD:
N/A

SUB MAP #: N/A

STREET NAME N/A

MATERIAL N/A

LINEAR FEET N/A



EXCAVATION DATA

CITY OF:	LOS ANGELES COUNTY
PLACING:	GROUND BED & BARE #6 GROUND WIRE

EXCAVATION IN	
EXCAVATION IN CONCRETE SIDEWALK	
EXCAVATION IN ASPHALT STREET	
EXCAVATION IN ASPHALT ALLEY	
EXCAVATION IN DIRT	18' X 1' = 18 SQ FT

TOTAL EXCAVATION:	18 SQ FT
NUMBER OF CUTS:	1

DATE	ATTID	LAYOUT ENGINEER
09/10/13	CHC/AW2158	ARNEL P. GALIZA
CHECKED		626-817-4226
APPROVED	09/17/2013	ag4193@att.com
DATE	REVISIONS	ag4193@att.com
		LESIE DONALDSON
		310-515-4360
		GEOCO
		B1-27
		CENTRAL OFFICE
		PARK SORRENTO
		UNDERGROUND CONSTRUCTION PROJECT NUMBER
		9233982
		DRAWING:
		1/1

Consulting, LLC
1700 E. Garry Ave., Suite 210
Santa Ana, CA 92705
(949) 250-0004 / FAX (949) 250-0006

SCALE
1" = 20'
THOMAS GUIDE
589-B5
FILENAME:
B127 9233982.dwg