


FIELD NOTES OF SURVEY OF
 SECS. 17 & 18, IN T. 1 S., R. 17 W., S. B. M.
 California.

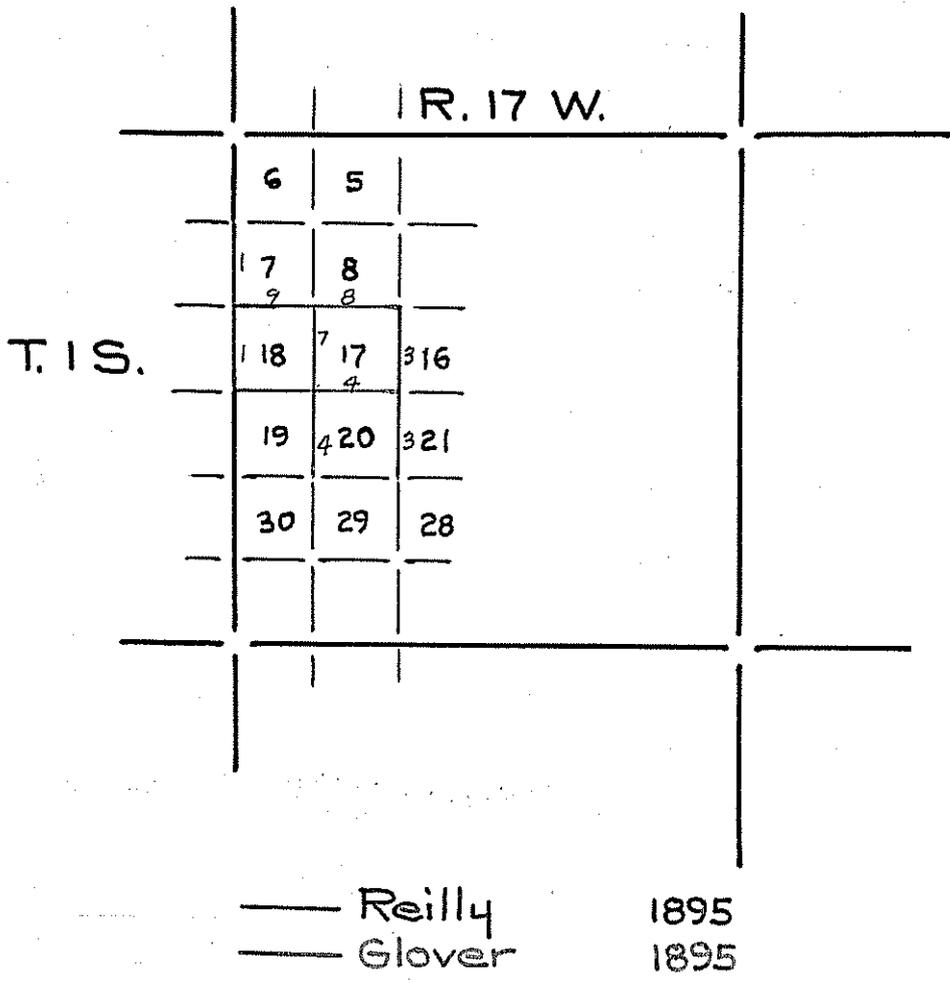

(Surveyed by J. R. Glover,
Contract of Nov. 20, 1884
Book 128, Part 15.)

Chains

W. Boundary T. 1 S., R. 17 W., S. B. M.

From the true point for cor. to Secs. 1, 6, 7 and 12, I run
South on a true line, bet. Secs. 7 and 12.

Va. $14^{\circ} 30'$ East.

80.00 Set a sandstone 24 x 8 x 6 ins., 18 ins. in the ground,
for cor. to Secs. 7, 12, 13 and 18, marked with 2 notches
on N. and 4 notches on S. edges; from which bears:
A live oak 8 ins. dia. N. $62\frac{1}{4}^{\circ}$ E. 118 lks. dist.
marked T. 1 S., R. 17 W., S. 7 B. T.
A live oak 5 ins. dia., S. $22\frac{1}{2}^{\circ}$ E., 7 lks. dist.
marked T. 1 S., R. 17 W., S. 18 B. T.
A live oak 10 ins. dia., S. $60^{\circ} 20'$ W., 143 lks. dist.,
marked T. 1 S., R. 18 W., S. 13 B. T.
No other tree within limits; raised a stone mound
alongside corner stone. Pits impracticable.
Land for N. 60.00 chs. rolling valley, remainder rough and
mountainous. Soil 3rd rate.
Scattering oak timber and dense undergrowth of chaparral.

Oct. 23 rd, 1895.

South on a true line bet. Secs. 13 and 18.

Va. $14^{\circ} 30'$ East.

Ascend.

4.00 Top of spur, bears E. and W. and descend.
8.92 Cross head of gulch, course E. and ascend.
13.00 Top of spur, bears E. and W. and descend.
25.00 Tapt's house, bears W. 197 lks. dist.

Chains

- 25.10 Cross road, to Tept's house, bears E. and W.
- 31.61 Cross Malibu Creek, 50 lks. wide, course S. 88° E. and ascend.
- 37.25 --- Cross road, bears N.E. and S.W. on top of low spur, bears N.E. and S.W. and descend.
- 38.26 Cross gulch, 8 lks. wide, course N.E. and ascend.
- 40.00 Set a sandstone 26 x 10 x 8 ins., 19 ins. in the ground for $\frac{1}{4}$ sec. cor., marked $\frac{1}{4}$ on W. face;
from which bears;
A live oak 18 ins. dia., S. 72° W. 6 lks. dist., marked $\frac{1}{4}$ S. B. T.
A live oak 18 ins. dia., N. 76° W., 33 lks. dist. marked $\frac{1}{4}$ S. B. T.
- 48.96 A sandstone boulder, 16 x 16 x 12 ft., on line.
- 60.00 Top of spur, bears E. and W. and descend.
- 64.00 Cross gulch, 4 lks. wide, course N. 25° E. and ascend.
- 79.50 Top of ridge, bears N.E. and S.W. and descend.
- 80.00 Set a sandstone 33 x 12 x 8 ins., 24 ins. in the ground, for cor. to Secs. 13, 18, 19 and 24, marked with 3 notches on N. and S. edges and raised a stone mound alongside.
Pits impracticable.
Land broken and mountainous.
Soil 3rd rate.
Scattering oak and sycamore timber and dense undergrowth of chaparral.

Oct. 24th, 1895.

(Surveyed by M.F. Reilly,
Contract of Nov. 20, 1884.
Book 361, Part 8.)

Subdivisions T. 1 S., R. 17 W., S.B.M.

From corner to Sections 20, 21, 28 and 29, I run
North between Sections 20 and 21.

Var. 14° 21' East.

80.00 Set a sandstone 34 x 16 x 14 inches, 25 inches in the
ground for corner to Sections 16, 17, 20 and 21, marked
with 3 notches on S. and 4 notches on E. edges, from
which bears a
Live oak 14 in. dia. N. 49-3/4° E., 50 links distant,
marked T. 1 S., R. 17 W., S. 16 B.T.
No. other tree within limits.
Raised a stone mound alongside corner stone.
Pits impracticable.
Land mountainous.
Soil third rate.
Scattering timber and dense undergrowth of chaparral.

North between sections 16 and 17.

Var. 14° 20' East.

Descend.

5.00 Cross head of Gulch, course SW. and ascend.
10.20 Top of spur bears NE. and SW. and descend.
22.00 Cross ravine 6 links wide, course SW. and ascend.
26.50 Leave dense brush bears E. and W.
35.50 Top of ridge bears NE. and SW. and descend.
39.10 Cross gulch 6 links wide, course N. 60° W. and ascend.
40.00 Set a granite stone 32 x 18 x 10 inches, marked $\frac{1}{4}$ on W.
face for quarter section corner in a stone mound.
Pits impracticable.

Too rocky to set corner stone in earth.

- 43.50 Top of spur bears NE. and SW. and descend.
48.58 Cross gulch 3 links wide, course SW. and ascend.
52.00 Top of spur bears NE. and SW. and descend.
70.50 Cross gulch 4 links wide, course W. and ascend.
75.50 Top of spur bears E. and W. and descend.
80.00 Set a sandstone 26 x 14 x 6 inches, 19 inches in the ground for corner to Sections 8, 9, 16 and 17, marked with 4 notches on S. and E. edges and raised a stone mound alongside.

Pits impracticable.

Land mountainous.

Soil third rate.

Timber of sycamore and oak and dense undergrowth of chaparral for 8. 26.00 chains.

From the corner to Sections 19, 20, 29 and 30, I run North between Sections 19 and 20.

Var. 14° 06' East.

Descend. -----

- 80.00 Set a sandstone 24 x 14 x 8 inches, 18 inches in the ground for corner to Sections 17, 18, 19 and 20, marked with 3 notches on S. and 5 notches on E. edges and raised a stone mound alongside.

Pits impracticable.

Land mountainous.

Soil third rate.

Timber of oak and dense undergrowth of chaparral.

East on a random line between Sections 17 and 20.

Var. 14° 30' East.

- 40.00 Set temporary quarter section corner.

80.22 Intersect north and south line 12 links north of corner to Sections 16, 17, 20 and 21, thence I run North $89^{\circ} 55'$ west on a true line between Sections 17 and 20.

Var. $14^{\circ} 20'$ East.

Descend.

4.00 To edge of perpendicular cliffs bears N. and S. impossible to chain.

To avoid same I offset 2.50 chains N. thence N. $89^{\circ} 55'$ W., 3.50 chains, thence S. 2.50 chains to line, thence N. $89^{\circ} 55'$ W., counting distances from corner to Sections 16, 17, 20 and 21.

Ascend.

8.10 Top of spur, bears NE. and SW. and descend.

23.50 Cross ravine 10 links wide, course N. 60° W. and ascend.

26.50 Top of spur bears NW. and SE. and descend.

35.50 Cross ravine 10 links wide, course NW. and ascend.

40.11 Set a sandstone $18 \times 12 \times 8$ inches, 12 inches in the ground for quarter section corner, marked $\frac{1}{4}$ on N. face dug pits $18 \times 18 \times 12$ inches E. and W. of stone $5\frac{1}{2}$ feet distant and raised an earth mound $1\frac{1}{2}$ feet high, $3\frac{1}{2}$ feet base alongside.

42.00 Top of low spur bears N. and S. and descend.

45.30 Cross gulch 3 links wide, course N. and ascend.

50.50 Top of spur, bears N. and S. and descend.

56.95 Cross gulch 4 links wide, course N. 20° W. and ascend.

60.00 Top of spur bears N. and S. and descend.

63.90 Cross gulch 3 lks. wide, course N. 25° W. and ascend.

65.30 Cross trail bears N. and S. on top of low spur, bears N. and S. and descend.

66.82 Cross gulch 4 links wide, course N. and ascend.

(Friel notes say 66.85 - D. Marsh 2-16-17).

- 72.00 ---- Top of spur bears N. and S. and descend.
 - 73.45 Cross Gulch 4 links wide, course N. and ascend.
 - 78.00 Top of spur bears N. and S. and descend.
 - 80.22 The corner to Sections 17, 18, 19 and 20.
Land mountainous.
Soil third rate.
Scattering oak timber and dense undergrowth of chaparral.
- November 21, 1895.

West on a random line between Sections 18 and 19.

Var. 14° 30' East.

- 40.00 Set temporary quarter section corner.
- 48.73 To foot of W. bank of Malibu Canyon (Creek in Friel notes) 100 feet high impossible to chain, I leave a flag at this point and proceed to the corner to Sections 13, 18, 19 and 24 on W. boundary of township due W. of flag which corner is a sandstone set firmly in the ground, marked with 3 notches on N. and S. edges with a stone mound in good order alongside and leave a flag. Returning to first flag, I run a base S. 2.00 chains to a point from which the flag at (corner to Sections 13, 18, 19 and 24, bears N. 86° 20' W. giving by calculations a distance from -- D.M.) corner to Sections 13 (17 in Friel's notes) 18, 19 and 24 bears N. 86° 20' W. giving by calculation a distance from corner to Sections 17, 18, 19 and 20 of
- 79.94 To corner to Sections 13, 18, 19 and 24 on W. boundary of Township, thence I run
East on true line between Sections 18 and 19.
Var. 14° 30' East.
Descend.
- 31.21 To point of triangulation (intersection) at foot of West bank of Malibu Canon.
- 32.94 Cross Malibu Creek 10 links wide, S. 30° W. and ascend.
- 39.94 Set a sandstone 26 x 12 x 8 inches, 19 inches in the ground for quarter section corner, marked $\frac{1}{4}$ on N. face

from which bears a

Live oak 9 in. dia. S. 80° W., 19 links distant, marked
 $\frac{1}{4}$ S.B.T.

Live oak 16 in. dia. N. 62°05' W. 61 links distant, marked
 $\frac{1}{4}$ S.B.T.

58.94 Top of spur bears N. 45° W. and S. 45° E. and descend.

65.94 Cross gulch 4 links wide, course N. 80° E. and ascend.

69.94 Top of ridge bears N. and S. and descend.

76.86 Cross gulch 3 links wide, course N. 40° W. and ascend.

79.94 The corner to Sections 17, 18, 19 and 20.

Land mountainous. Soil third rate.

Timber oak and dense undergrowth of chaparral.

North between Sections 17 and 18.

Var. 14° 30' East.

Descend.

15.85 Cross gulch 4 links wide, course S. 85° W. and ascend.

17.25 Cross road, bears E. and W.

20.00 Top of spur, bears E. and W. and descend.

24.70 Enter flat bears E. and W.

29.50 Leave flat bears E. and W. and ascend.

35.30 Top of spur bears N. 80° W. and S. 80° E.

Sweeney's house bears N. 54 $\frac{1}{2}$ ° E. Descend.

39.50 Cross gulch 4 links wide, course W. and ascend.

40.00 Set a sandstone 24 x 14 x 8 inches, 18 inches in the
ground for quarter section corner, marked $\frac{1}{4}$ on W. face,
from which bears a

Live oak 10 in. dia. N. 8° W. 76 links distant, marked
 $\frac{1}{4}$ S.B.T.

No other tree within limits.

Raised a stone mound alongside corner stone.

Pits impracticable.

- 40.50 Top of spur bears E. and W. and descend.
43.50 Enter field bears E. and W.
44.00 Sweeney's house bears S. 77° E.
46.75 Leave field bears E. and W. cross road bears NW. and SE.
47.35 Cross Malibu Creek in Malibu Canon 30 links wide, course
N. 80° W. and ascend.
56.25 Top of spur bears N. 40° W. and S. 40° E. and descend.
58.85 Cross wash 10 links wide, course S. 65° E. and ascend.
74.75 Top of spur bears E. and W. and descend.
80.00 Set a post 4 feet long, 4 inches square with marked
stone 12 inches in the ground for corner to Sections 7,
8, 17 and 18, marked
T. 1 S., S. 8 on N.E.
R. 17 W., S. 17 on SE.
S. 18 on SW. and
S. 7 on NW. faces with 4 notches on S. and 5 notches on
E. edges.
Dug pits 18 x 18 x 12 inches in each section 5½ feet
distant and raised an earth mound 2 feet high, 4½ feet
base around post. Land mountainous.
Soil third rate.
Scattering oak timber and dense undergrowth of chaparral.

November 22, 1895.

East on a random line between Sections 8 and 17.

Var. 14° 15' East.

40.00m Set temporary quarter section corner.

80.08 Intersect north and south line 22 links north of corner
to Sections 8, 9, 16 and 17.

Thence I run

North 59° 51' West on a true line between Sections 8 and 17

Var. 14° 02' East.

- Ascend.
- .50 Top of spur bears N. and S. and descend.
- 24.50 Cross Malibu Creek 10 links wide, in Malibu Canon,
course S. and ascend.
- 27.50 Top of ridge bears N. 25° W. and S. 25° E. and descend.
- 33.76 Cross gulch 5 links wide, course S. 30° E. and ascend.
- 36.00 Top of spur bears NE. and SW. and descend.
- 40.04 Set a sandstone 26 x 12 x 7 inches, 19 inches in the
ground for quarter section corner, marked $\frac{1}{4}$ on N. face
and raised a stone mound alongside.
- Pits impracticable.
- 41.65 Cross gulch 4 links wide, course S. 10° E. and ascend.
- 43.10 Top of spur bears N. and S. and descend.
- 47.74 Cross gulch 3 links wide, course SE. and ascend.
- 62.50 Top of spur bears N. 20° W. and S. 20° E. and descend.
- 63.00 Cross gulch 4 links wide, course S. 10° E. and ascend.
- 71.00 Top of ridge bears NW. and SE. and descend.
- 80.08 The corner to Sections 7, 8, 17 and 18.
Land mountainous. Soil third rate.
Timber of oak and dense undergrowth of chaparral.

West on a random line between Sections 7 and 18.

Var. 14° 15' East.

- 40.00 Set temporary quarter section corner.
- 79.90 Intersect west boundary of township 8 links south of
corner to Sections 7, 12, 13 and 18, which is a sand-
stone set firmly in the ground, marked with 2 notches
on N. and 4 notches on S. edges with a stone mound in
good order alongside, from which bears a
Live oak 8 in. dia. N. 62 $\frac{1}{4}$ ° E., 118 links distant
marked T. 1 S., R. 17 W., S. 7 B.T.

Live oak 5 in. dia. S. $22\frac{1}{2}^{\circ}$ E. 7 links distant,
marked T. 1 S., R. 17 W., S. 18 B.T.

Live oak 10 in. dia., S. $60^{\circ} 20'$ W., 143 links distant,
marked T. 1 S., R. 18 W., S. 13 B.T.

Thence I run

South $89^{\circ} 57'$ East on a true line between Sections 7 and 18.

Var. $14^{\circ} 30'$ East.

Descend.

- 3.50 Cross gulch 4 links wide, course S. 45° E. and ascend.
3.70 Cross trail bears NW. and SE.
12.50 Top of spur, bears N. and S. and descend.
18.75 Cross gulch 5 links wide, course S. and ascend.
24.00 Top of spur bears N. and S. and descend.
27.30 Cross wire fence bears N. and S.
29.90 Cross road, bears NW. and SE.
31.50 Enter valley bears N. and S.
35.00 Leave valley bears N. and S. and descend.
36.50 Top of spur bears N. and S. and descend.
38.55 Cross fence bears N. and S. and enter corral.
39.10 ----- Leave corral and cross fence bears N. and S.
29.90 Set a post 3 feet long, 3 inches square 24 inches in
the ground for quarter section corner, marked $\frac{1}{4}$ S.
on N. face from which bears a
Live oak 14 in. dia. S. 56° W. 88 links distant,
marked $\frac{1}{4}$ S. S.B.T.
Live oak 24 in. dia. N. $24\frac{1}{2}^{\circ}$ W., 81 links distant,
marked $\frac{1}{4}$ S.B.T.
Thompson's house bears N. 24° E., 129 links distant.
40.60 Cross ravine 10 links wide, course S. 25° W. and ascend.
60.00 Top of spur bears NW. and SE. and descend.
66.00 Cross head of gulch course NW. and ascend.

- 74.50 Top of spur bears N. and S. and descend.
76.10 Cross gulch 3 links wide, course S. 25° E. and ascend.
77.00 Top of spur bears N. and S. and descend.
77.90 Cross gulch 3 links wide, course SW. and ascend.
79.90 The corner to Sections 7, 8, 17 and 18.
Land mountainous.
Soil third rate.
Scattering oak timber and dense undergrowth chaparral.

November 23, 1895.
