



- ① DIG 6" X 4" PIT
R/C 4C
- ② LOCATE & ADAPT 1 OF 4-4" EXISTING MTD
WITH NEW 1-4" C-PC DUCT AND EXTEND TO
PICK UP SUB'S DUCT AT P/L OF 3529 CITY TERRACE DR.
R/C 4C
- ③ PL. 13' 1-4" C-PC
PTS 77 OR EQUIV.
PM 1 DU 13'
R/C 4C
TL = MH # 6892 TO P/L OF 3529 CITY TERRACE DR. = 74' VERIFY

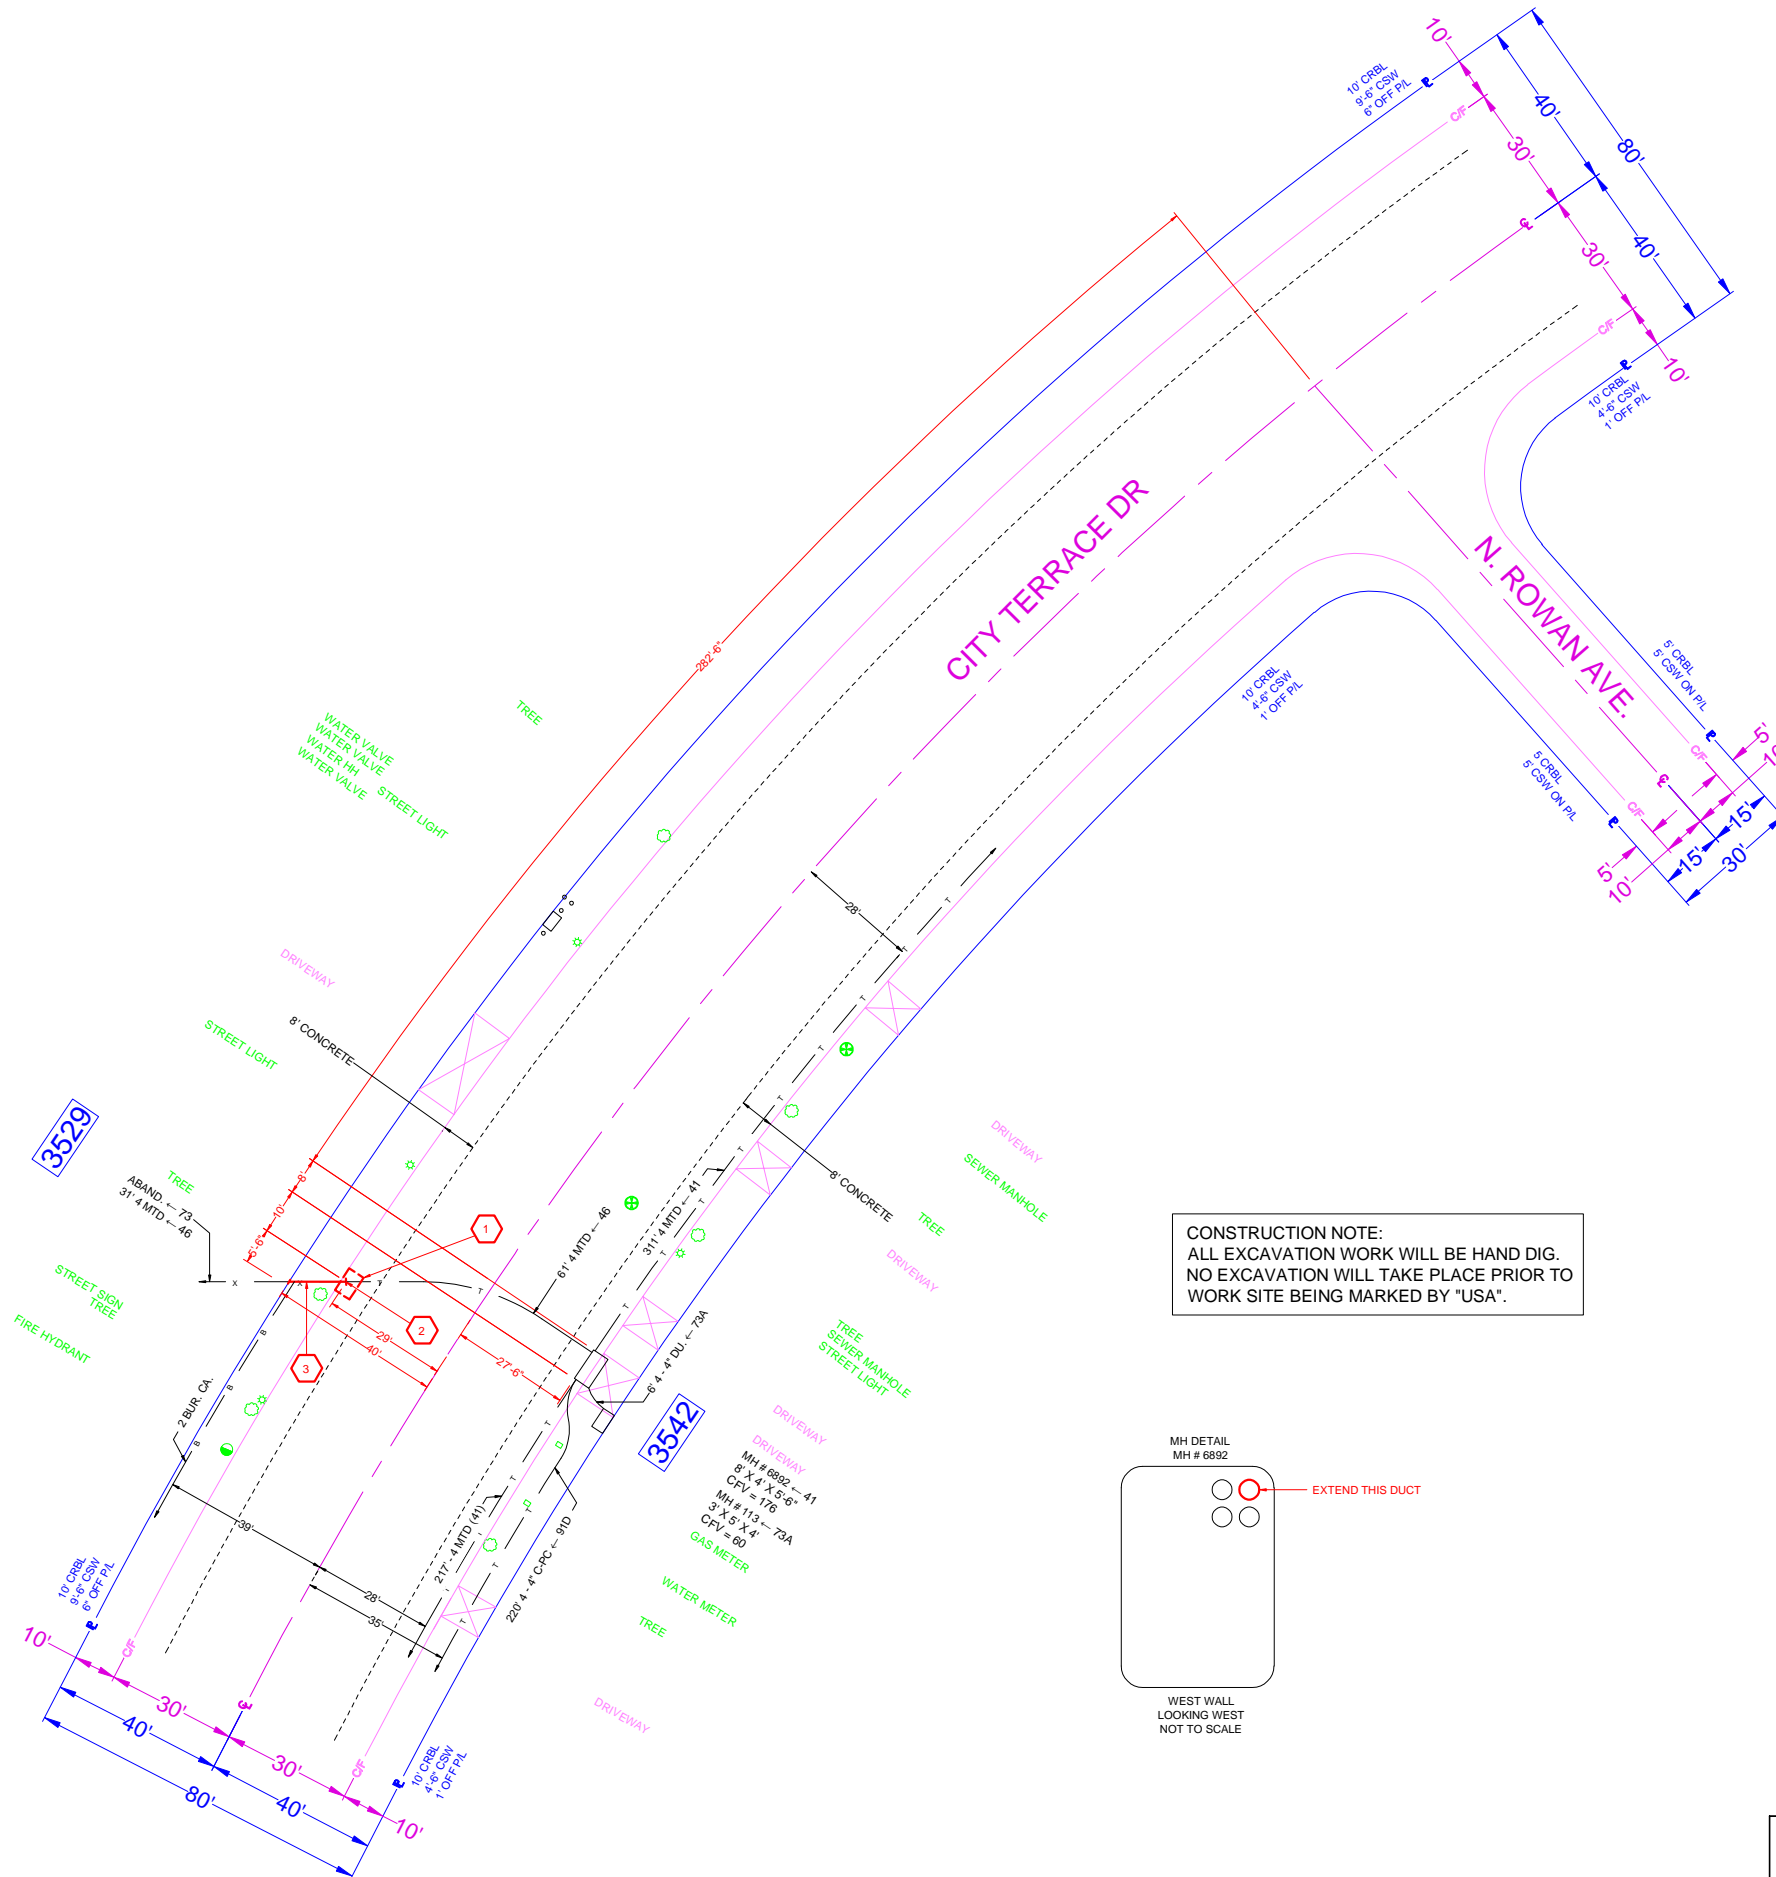

CONSTRUCTION NOTE:
ALL EXCAVATION WORK WILL BE HAND DIG.
NO EXCAVATION WILL TAKE PLACE PRIOR TO
WORK SITE BEING MARKED BY "USA".

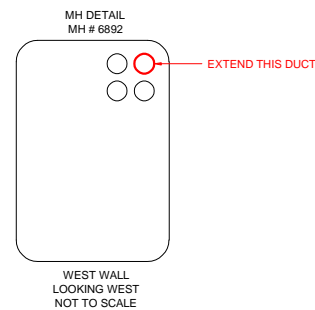

CONSTRUCTION REQUIREMENTS

1. MAINTAIN MINIMUM COVER OF 36" BELOW FLOW LINE.
2. VERIFY EXISTING SUBSTRUCTURES PRIOR TO EXCAVATION.
3. ALL 4" TO CONFORM TO PTS.-77 OR EQUIVALENT.
4. ALL 2" TO CONFORM TO PTS.-66 OR EQUIVALENT.
5. ALL BACKFILL TO BE SAND 12" BELOW AND 6" ABOVE.
6. DO NOT BACKFILL OVER ANY TELEPHONE BURIED SPICE LOCATIONS UNTIL AUTHORIZED BY TELEPHONE COMPANY INSPECTOR.
7. PLACE # 6 TINNED GROUND WIRE AT BONDING POINTS. (SEE BONDING DETAIL).
8. PLACE PULL ROPE IN NEW CONDUIT.
9. DO NOT CUT CURB & GUTTER.
10. ALL SURFACES AND LANDSCAPES WHICH HAVE BEEN REMOVED OR DAMAGED IN THE COURSE OF CONSTRUCTION SHALL BE RECONSTRUCTED OR REPLACED TO AT LEAST EQUAL OR BETTER THAN THE PREVIOUS OR ADJACENT SURFACE.
11. ALL TRAFFIC CONTROL TO BE IN ACCORDANCE WITH THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) LATEST EDITION.
12. PER AT&T GUIDELINES, ALL HANDHOLES, SPICE BOXES, AND MANHOLES TO BE PURCHASED FROM EITHER NEWBASE OR UTILITY VAULT.

THIS PROJECT REQUIRES EXCAVATION. CONSTRUCTION WILL UTILIZE AND IMPLEMENT ALL BEST MANAGEMENT PRACTICES (BMP'S) AS REQUIRED TO ENSURE COMPLIANCE WITH AT&T POLICY LETTER ISSUED FEBRUARY 21, 2003 AND REVISED IN OCTOBER 2005 BY ENVIRONMENTAL MANAGEMENT CONCERNING STORM WATER PERMITTING AND STORM WATER POLLUTION PREVENTION PLANS (SWPPPS) AND IN ACCORDANCE WITH THE CLEAN WATER ACT (1972) AND EPA REGULATIONS PUBLISHED IN 1990 AS MODIFIED BY THE PHASE I RULE IN 1999.

LOCATION: CITY TERRACE DR., W/S OF STREET, 300'-6" S/O C/L OF N. ROWAN AVE.

DESCRIPTION: DIG 6' X 4' PIT, LOCATE & ADAPT 1 OF 4-4" EXISTING MTD WITH NEW 1-4" C-PC DUCT AND EXTEND TO PICK UP SUB'S DUCT AT P/L OF 3529 CITY TERRACE DR., PLACE 13' OF 1-4" DUCT.

BACKFILL SHALL BE PER COUNTY OF LOS ANGELES STANDARDS.

STREET TYPE	SOIL CLASS	PROPOSED BACKFILL
MAJOR	N/A	N/A
SECONDARY	N/A	N/A
LOCAL	N/A	N/A
ALLEY	N/A	N/A

CONDUIT RECORD: E310C81
CITY TERRACE DR.
RAMBOZ DR. TO RAMONA BLVD.
E310C254 - MARENGO ST.
CITY TERRACE DR. TO RAMONA
BLVD.

SUB MAP #: N/A

STREET NAME N/A

LINEAR FEET N/A

EXCAVATION DATA

CITY OF:	LOS ANGELES COUNTY
----------	--------------------

PLACING:	UG CONDUIT
----------	------------

EXCAVATION IN

EXCAVATION IN CONCRETE SIDEWALK	11' X 1' = 11 SQ FT
EXCAVATION IN CONCRETE STREET	2' X 1' = 2 SQ FT
EXCAVATION IN CONCRETE STREET (PIT)	6' X 4' = 24 SQ FT
EXCAVATION IN DIRT	

TOTAL EXCAVATION:	37 SQ FT
-------------------	----------

NUMBER OF CUTS:	2
-----------------	---

	DATE	ATTID	LAYOUT ENGINEER JESS CORTEZ
	DRAWN	10/4/14	AFL / EM
CHECKED			EMAIL ADDRESS jc1519@att.com
APPROVED			FACILITY ENGINEER MARCO MEDINA

DATE	REVISIONS
------	-----------

GECCO
F3-10

		25 10
		CENTRAL O

		ANGEL

		UNDERGROUND PROJECT NO.
--	--	----------------------------

SCALE	THOMAS GUIDE
13 201	225 22

1" = 20'	635-D3	
FILENAME:		DRAWING

E310 9208143.dwg
