
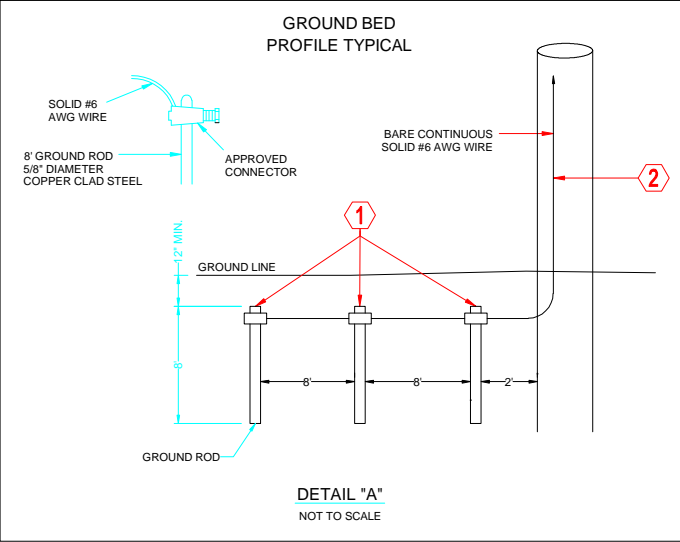


PLACEMENT DATA

① PL 18 TR FT. # 6 GROUND WIRE
INSTALL 3 COPPER GROUND RODS
5/8" DIAMETER, 8' MINIMUM LENGTH
NO PM - PROTECTION PRECAUTION
POLE # 4209233E
R/C 22C

② PL 32' # 6 GROUND WIRE
POLE # 4209233E
R/C 22C

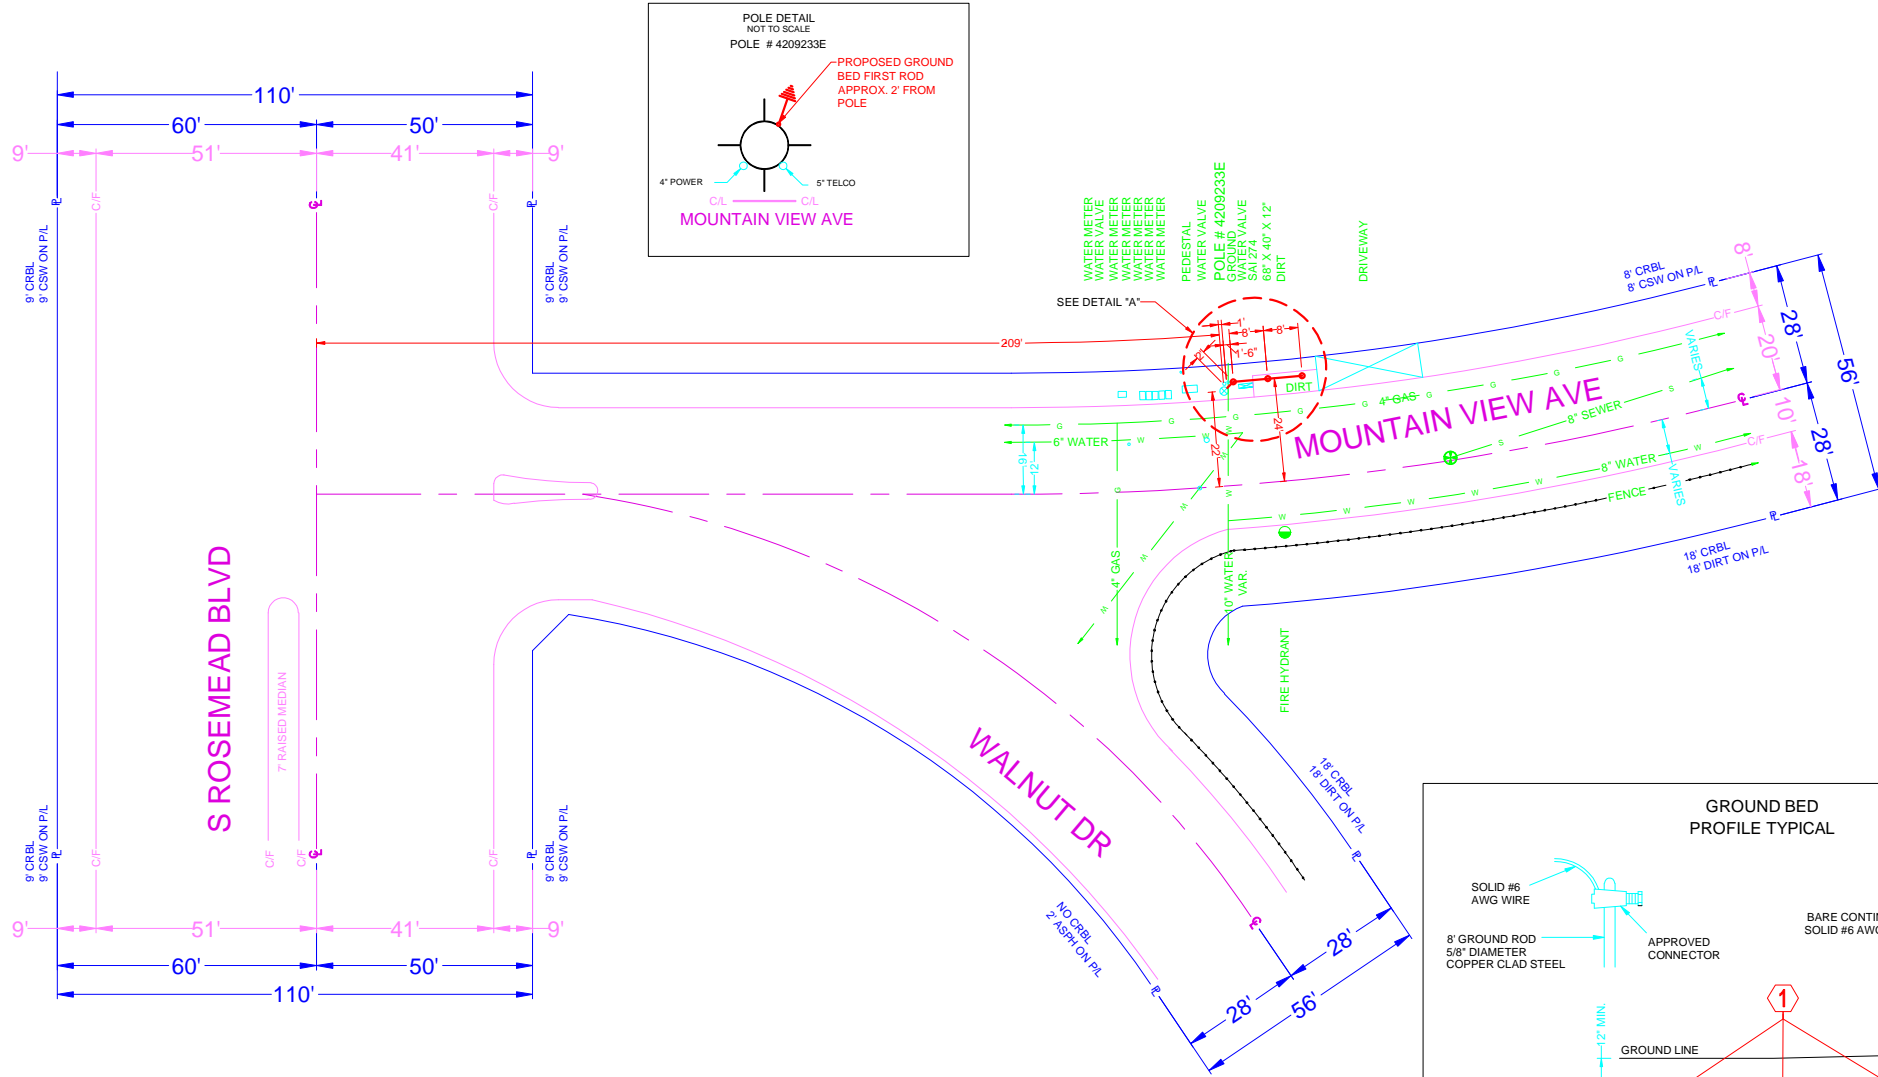

Consulting, LLC
1700 E. Garry Ave., Suite 210
Santa Ana, CA 92705
(949) 250-0004 / FAX (949) 250-0006



CONSTRUCTION REQUIREMENTS

1. MAINTAIN MINIMUM COVER OF 36" BELOW FLOW LINE.
2. VERIFY EXISTING SUBSTRUCTURES PRIOR TO EXCAVATION.
3. ALL 4" TO CONFORM TO PTS.-77 OR EQUIVALENT.
4. ALL 2" TO CONFORM TO PTS.-66 OR EQUIVALENT.
5. ALL BACKFILL TO BE SAND 12" BELOW AND 6" ABOVE.
6. DO NOT BACKFILL OVER ANY TELEPHONE BURIED SPLICE LOCATIONS UNTIL AUTHORIZED BY TELEPHONE COMPANY INSPECTOR.
7. PLACE # 6 TINNED GROUND WIRE AT BONDING POINTS. (SEE BONDING DETAIL).
8. PLACE PULL ROPE IN NEW CONDUIT.
9. DO NOT CUT CURB & GUTTER.
10. ALL SURFACES AND LANDSCAPES WHICH HAVE BEEN REMOVED OR DAMAGED IN THE COURSE OF CONSTRUCTION SHALL BE RECONSTRUCTED OR REPLACED TO AT LEAST EQUAL OR BETTER THAN THE PREVIOUS OR ADJACENT SURFACE.
11. ALL TRAFFIC CONTROL TO BE IN ACCORDANCE WITH THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) LATEST EDITION.
12. PER AT&T GUIDELINES, ALL HANDHOLES, SPLICE BOXES, AND MANHOLES TO BE PURCHASED FROM EITHER NEWBASE OR UTILITY VAULT.

THIS PROJECT REQUIRES EXCAVATION. CONSTRUCTION WILL UTILIZE AND IMPLEMENT ALL BEST MANAGEMENT PRACTICES (BMPs) AS REQUIRED TO ENSURE COMPLIANCE WITH AT&T POLICY LETTER ISSUE FEBRUARY 21, 2003 AND REVISED IN OCTOBER 2005 BY ENVIRONMENTAL MANAGEMENT CONCERNING STORM WATER PERMITTING AND STORM WATER POLLUTION PREVENTION PLANS (SWPPP's) AND IN ACCORDANCE WITH THE CLEAN WATER ACT (1972) AND EPA REGULATIONS PUBLISHED IN 1990 AS MODIFIED BY THE PHASE II RULE IN 1999.

LOCATION:
POLE # 4209233E, MOUNTAIN VIEW AVE, N/S OF STREET, 209' E/O C/L OF S ROSEMEAD BLVD

DESCRIPTION: PLACE GROUND BED AND 32' OF BARE # 6 GROUND WIRE AT POLE# 4209233E.

BACKFILL SHALL BE PER COUNTY OF LOS ANGELES STANDARDS.

STREET TYPE	SOIL CLASS	PROPOSED BACKFILL
MAJOR	N/A	N/A
SECONDARY	N/A	N/A
LOCAL	N/A	N/A
ALLEY	N/A	N/A

CONDUIT RECORD: N/A

SUB MAP #: N/A

STREET NAME N/A

MATERIAL N/A

LINEAR FEET N/A



EXCAVATION DATA

CITY OF: COUNTY OF LOS ANGELES
PLACING: GROUND BED & 32' OF BARE # 6 GROUND WIRE

EXCAVATION IN
EXCAVATION IN CONCRETE SIDEWALK 6'-6" X 1' = 6.5 SQ FT
EXCAVATION IN ASPHALT STREET
EXCAVATION IN ASPHALT ALLEY
EXCAVATION IN DIRT 11'-6" X 1' = 11.5 SQ FT

TOTAL EXCAVATION: 18 SQ FT
NUMBER OF CUTS: 1

DATE 11/11/2013 ATTID CHC/DA6015
DRAWN 11/11/2013 CHC/DA6015
CHECKED
APPROVED 01/30/2014 AG4193

DATE REVISIONS
RICKY ILLANGAKOON
TELEPHONE NUMBER 949-379-8076

SECCO K1-03
CENTRAL OFFICE PASADENA-GREEN

UNDERGROUND CONSTRUCTION PROJECT NUMBER 9284869

SCALE 1" = 20' THOMAS BUEHR 566-HS
FILENAME: K103 9284869.dwg DRAWING: 2/4