


CONSTRUCTION REQUIREMENTS

1. MAINTAIN MINIMAL COVER OF 36" BELOW FLOW LINE.
2. VERIFY EXISTING SUBSTRUCTURES PRIOR TO EXCAVATION.
3. ALL 4" TO CONFORM TO PIS-36 OR EQUIVALENT.
4. ALL 2" TO CONFORM TO PIS-36 OR EQUIVALENT.
5. DO NOT BACKFILL TO ANY TELEPHONE BURIED SPICE LOCATIONS UNTIL AUTHORIZED BY TELEPHONE COMPANY INSPECTOR.
6. PLACE # 6 TINED GROUND WIRE AT BONDING POINTS. (SEE BONDING DETAIL).
7. PLACE # 6 TINED GROUND WIRE AT BONDING POINTS. (SEE BONDING DETAIL).
8. PLACE PULL ROPE IN NEW CONDUIT.
9. DO NOT CUT CORB & GUTTER APPS WHICH HAVE BEEN.
10. ALL SURFACES AND LANDSCAPES WHICH HAVE BEEN.
11. ALL TRAFFIC CONTROL TO BE IN ACCORDANCE WITH THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) LATEST EDITION.
12. PER AT&T GUIDELINES, ALL HANDHOLES, SPICE BOXES AND MANHOLES TO BE PURCHASED FROM EITHER NEWBASE OR UTILITY VAULT.

THIS PROJECT REQUIRES EXCAVATION CONSTRUCTION WILL UTILIZE AND IMPLEMENT ALL BEST MANAGEMENT PRACTICES (BMPs) AS REQUIRED TO ENSURE COMPLIANCE WITH AT&T POLICY LETTER ISSUE FEBRUARY 21, 2003 AND REVISED IN OCTOBER 2005 BY ENVIRONMENTAL MANAGEMENT CONCERNING STORM WATER PERMITTING AND STORM WATER POLLUTION PREVENTION PLANS (SWPPP) AND IN ACCORDANCE WITH THE CLEAN WATER ACT (1972) AND REGULATIONS PUBLISHED IN 1980 AS MODIFIED BY THE PHASE II RULE IN 1986.

LOCATION: ROSECRANS AVE, WIS OF STREET, 21' WID CL OF CORLETT AVE
DESCRIPTION: PLACE GROUND BED AND 32' OF BARE #6 GROUND WIRE AT POLE 835355E.

BACKFILL SHALL BE PER COUNTY OF LOS ANGELES STANDARDS.

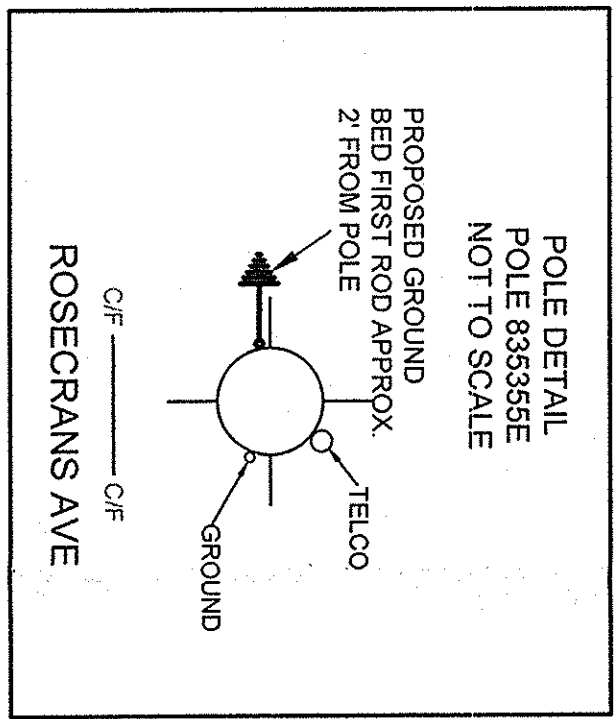

EXCAVATION DATA

CITY OF	COUNTY OF LOS ANGELES	
PLACING	GROUND BED & 32' BARE #6 GROUND WIRE	
EXCAVATION IN		
EXCAVATION IN CONCRETE SIDEWALK	18' X 1' = 18 SQ. FT.	
EXCAVATION IN ASPHALT STREET		
EXCAVATION IN DECK WALKWAY		
EXCAVATION IN DIRT		
TOTAL EXCAVATION:	18 SQ. FT.	
NUMBER OF CUTS:	1	
DATE	ATTID	ANTHONY KISTLER
DRAWN	CHIC/RT948	TELEPHONE NUMBER 626-570-5421
CHECKED		EMAIL ADDRESS ak2537@att.com
APPROVED	AK2537	PERSON LOUSE TELEPHONE NUMBER 310-554-6111
DATE	REVISIONS	REVISION
		AT&T
		CENTRAL OFFICE
		COMPTON
		UNDERGROUND CONSTRUCTION
		PROJECT NUMBER 9205611
		DRAWING: 1/1

Consulting, LLC
1700 E. Garry Ave., Suite 210
Santa Ana, CA 92705
(949) 250-0004 / FAX (949) 250-0006