


Field Notes of Section 8, in
 TOWNSHIP 1 SOUTH, RANGE 19 WEST, SAN BERNARDINO
 MERIDIAN, CALIFORNIA

Copied from Notes loaned by

C. E. J. MILLS

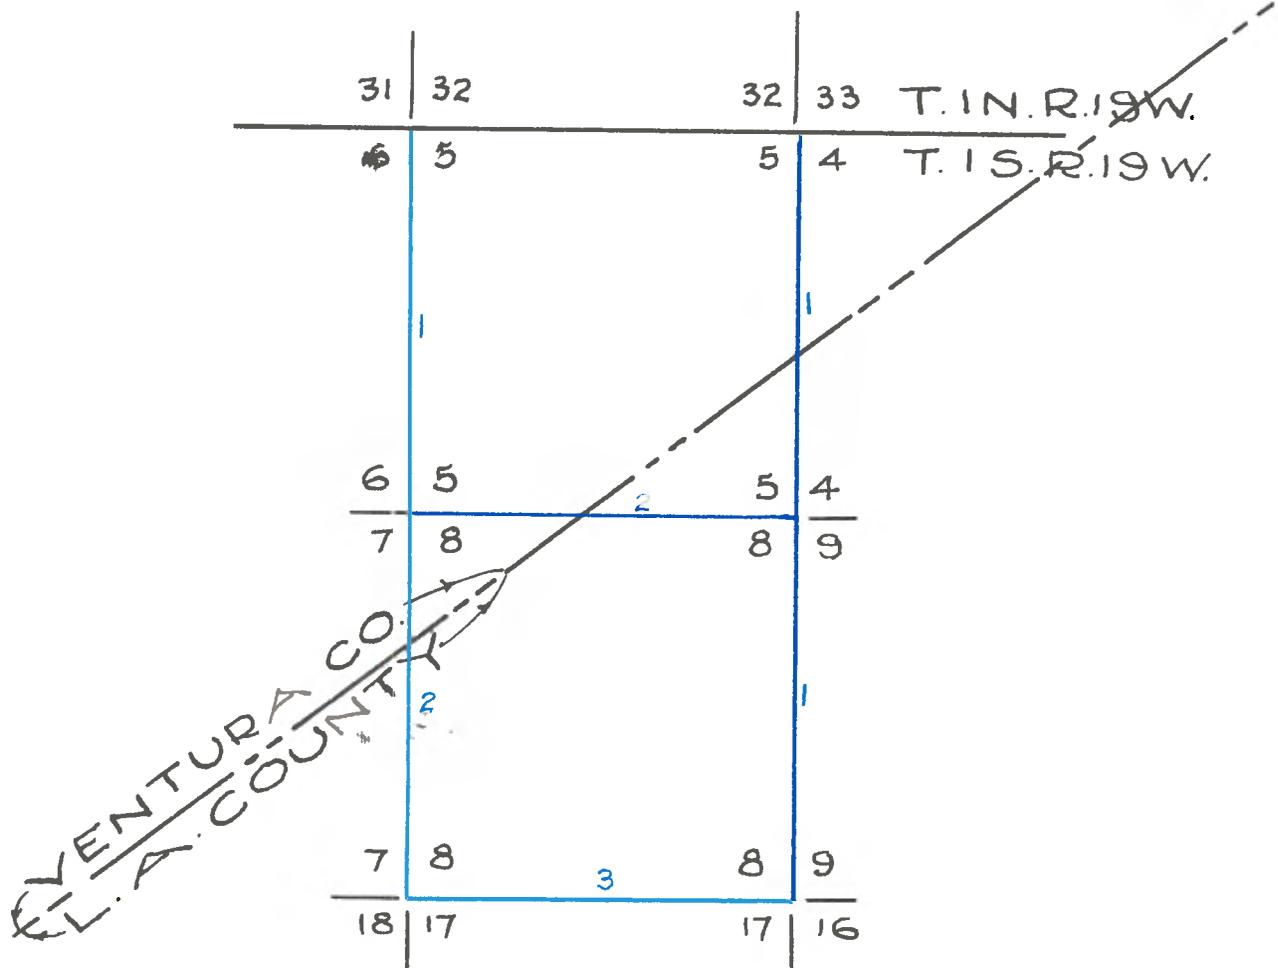

Blue lines run by J. R. Glover 1896

T. 1 S., R. 19 W., S. B. M.

S. 0° 02' E. on a true line between Sections 4 and 5,

x x x x x x x

80.00 Set a sandstone 24 x 14 x 5 ins., 18 ins. in the ground for corner to Sections 4, 5, 8 and 9, marked with 4 notches on E. and 5 notches on S. edges; and raised a mound of stone 2 feet base, 1½ feet high W. of corner. Pits impracticable.

x x x x x x x

- - - - -

S. 0° 02' E. on a true line between Sections 8 and 9,
Descend through dense chaparral.

40.00 Sandstone boulder in place 4 x 3 x 1 foot above the ground which I marked with x at exact corner point and ¼ on West face; for ¼ section corner, and raised a stone mound 2 feet base, 1½ feet, high, W. of corner.

Pits impracticable.

40.10 Gulch 15 lks. wide, course SW. ascend.

60.00 Top of spur 100 feet above gulch, bears E. and W.

Descend.

75.04 Gulch 10 lks. wide, 75 feet below top of spur course W. ascend.

80.00 Set a sandstone 20 x 12 x 10 ins., 15 ins. in the ground for corner to Sections 8, 9, 16 and 17, marked with 4 notches on S. and E. edges; and raised a mound of stone covered with earth, 3½ feet base, 1½ feet high W. of corner.

Land mountainous. Soil 3rd rate.

Scattering oak timber.

Dense undergrowth of chaparral.

Mountainous land 80.00 chs.

- - - - -

S. 0° 03' E. on a true line between Sections 5 and 6, descend.

x x x x x x x

80.00 Set a sandstone 20 x 18 x 10 ins., 15 ins. in the ground for corner to Sections 5, 6, 7 and 8, marked with 5

notches on S. and E. edges; and raised a stone mound, $2\frac{1}{2}$ feet base, 2 feet high, W. of corner.

Pits impracticable.

X X X X X X X X

East on a random line between Sections 5 and 8.

40.00 Set temporary $\frac{1}{4}$ Section corner.

80.00 Intersect N. and S. line 8 lks. S. of corner to Sections 4, 5, 8 and 9.

Thence I run,

S. $89^{\circ} 57'$ W. on a true line between Sections 5 and 8, descend.

40.00 Gulch, 10 lks. wide, 200 feet below Section corner, course S. 20° W., ascend.

40.05 Set a sandstone $16 \times 10 \times 8$ ins., 11 ins. in the ground for $\frac{1}{4}$ section corner marked $\frac{1}{4}$ on N. face; and raised a stone mound, 2 feet base, $1\frac{1}{2}$ feet high, N. of corner.

Pits impracticable.

69.50 Top of ridge, 125 feet above $\frac{1}{4}$ section corner, bears N. and S. descend.

80.10 The corner to Sections 5, 6, 7 and 8.

Land mountainous. Soil 3d rate.

Scattering oak timber.

Dense undergrowth of chaparral.

Mountainous land 80.10 chs.

S. $0^{\circ} 03'$ E. on a true line between Sections 7 and 8,

Descend through dense chaparral.

18.26 Gulch 8 lks. wide, course SW. ascend.

38.00 Top of ridge 300 feet above gulch bears NE and SW
Descend.

40.00 Set a sandstone $20 \times 16 \times 12$ ins., 15 ins. in the ground for $\frac{1}{4}$ section corner marked $\frac{1}{4}$ on W. face; and raised a

stone mound covered with earth, $3\frac{1}{2}$ feet base, $2\frac{1}{2}$ feet high, W. of corner.

74.14 Canon 20 lks. wide, 100 feet below top of ridge, course SW. ascend
80.00 Top of rocky spur bears E. and W. and set a sandstone
24 x 12 x 10 ins., 18 ins. in the ground for corner to
Sections 7, 8, 17 and 18, marked with 4 notches on S. and 5
notches on E. edges; and raised a stone mound 2 feet base, $1\frac{1}{2}$ feet
high, W. of corner.
Pits impracticable.
Land mountainous.
Soil 3d rate.
Scattering oak timber.
Dense undergrowth of chaparral.
Mountainous land 80.00 chs.

- - - - -

East on a random line between Sections 8 and 17
40.00 Set temporary $\frac{1}{4}$ section corner.
79.90 Intersect N. and S. line 21 lks. S. of corner to Sections 8, 9,
16 and 17,
Thence I run
S. $89^{\circ} 51'$ W. on a true line between Sections 8 and 17
Descend through dense chaparral.
24.02 Gulch 15 lks. wide, 300 feet below Section Corner.
Course S. 45° W. ascend.
28.00 Top of spur 50 feet above gulch bears N. and S.
Drake's house, bears S. $12\frac{1}{2}^{\circ}$ E. descend.
38.50 Creek 10 lks. wide, 50 feet below top of spur, course S.; ascend.
39.95 Set a sandstone 15 x 12 x 8 ins., 10 ins. in the ground for $\frac{1}{4}$ sec-
tion corner marked $\frac{1}{4}$ on N. face; from which bears
A Sycamore 6 ins. diam. N. 74° E. 245 lks. dist., marked $\frac{1}{4}$ S B T.
No other tree within limits; raised a stone mound 2 feet base,
 $1\frac{1}{2}$ feet high, N. of corner.

Pits impracticable.

- 46.15 Top of ridge 75 feet above corner bears N. 20° W. and S. 20° E.
descend.
- 49.80 Gulch, 10 lks. wide, 60 feet below top of ridge, course S. ascend
- 62.00 Top of ridge, 80 feet above gulch, bears NE. and SW.
Descend.
- 79.90 The corner to Sections 7, 8, 17 and 18.
Land mountainous.
Soil 3rd rate.
Scattering oak and sycamore timber.
Dense undergrowth of chaparral.
Mountainous land 79.90 chs.

Surveyed by James R. Glover, Deputy Surveyor,
Contract dated November 7, 1896.

.....