


Field Notes of Sections 20 and 21 in
TOWNSHIP 1 SOUTH, RANGE 17 WEST, S. B. M.

Copied from notes loaned by

C. E. J. Hills.

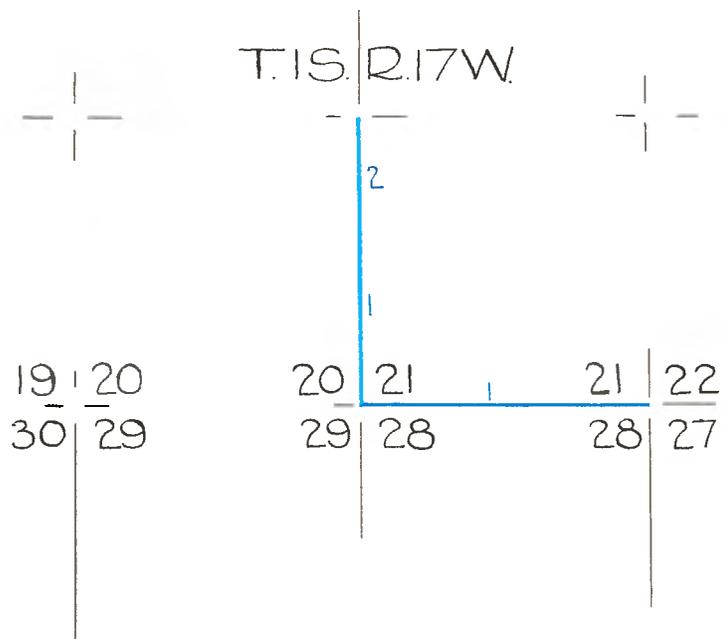

Blue - M. F. Reilly - 1895

DEPARTMENT OF THE INTERIOR,
General Land Office.
Office of Public Surveys.
145 Sansome Street.

San Francisco, California.
April 8th, 1926.

I, Frank E. Barker Office Cadastral Engineer, for California, do hereby certify that the annexed transcript of field notes of survey of the East line of section 20, Township 1 South, Range 17 West, San Bernardino Meridian, is a true and literal exemplification of said field notes as they remain on file and of record in this office.

(Official Seal)

FRANK E. BARKER,
Office Cadastral Engineer
for California.

Subdivisions T. 1 S., R. 17 W., S.B.M.

From the corner to sections 21, 23, 27 and 28 I run
WEST on a true line between sections 21 and 28.

Var. 14° 18' East.

Descend.

x x x x x x x

80.00 Set a sandstone 24x18x15 inches, 18 inches in the ground
for corner to sections 20, 21, 28 and 29, marked with 2
notches on S. and 4 notches on E. edges, and raised a stone
mound alongside. Pits impracticable.

From corner to sections 20, 21, 28 and 29, I run
North between sections 20 and 21

Var. 14° 21' east.

Ascend.

- .50 Top of spurnbears E. and W. and descend.
- 3.02 Cross gulch 6 links wide, course S. 25' West and ascend.
- 4.10 Top of low spur bears E. and W. and descend.
- 6.92 Cross same gulch, 6 links wide, course SE. and ascend.
- 18.85 Cross trail bears NW. and SE.
- 32.00 Top of divide, bears E. and W. and descend.
- 38.80 Cross gulch 3 links wide, course NW. and ascend.
- 40.00 Set a sandstone 30x16x9 inches, 22 inches in the ground for
quarter section corner, marked $\frac{1}{4}$ on W. face, and raised a
stone mound alongside.
Pits impracticable.
- 42.50 Top of spur bears E. and W. and descend.
- 50.88 Cross gulch, 3 links wide, course N. 65° W. and ascend.
- 57.00 Top of ridge bears E. and W. and descend.
- 68.00 Cross ravine, 5 links wide, course W. and ascend.
- 79.50 Top of spur bears NE. and SW. and descend.
- 80.00 Set a sandstone 34x16x14 inches, 25 inches in the ground
for corner to sections 16, 17, 20 and 21, marked with 3 notches

Subdivisions T. 1 S., R. 17 W., S.B.M.

on S. and 4 notches on E. edges, from which bears a

Live oak 14 in. dia. N. $49\frac{1}{4}^{\circ}$ E. 50 links distant,
marked T 1 S., R. 17 W., S. 16 B.T.

No other tree within limits.

Raised a stone mound alongside corner stone.

Pits impracticable.

Land, mountainous.

Soil, third rate.

Scattering timber and dense undergrowth of chaparral.

Survey made by M.F. Reilly, Deputy Surveyor,
Under contract of November 20, 1884.
Survey commenced October 26, 1895.
Survey completed November 27, 1895.

Book 361-8