


EAST BOUNDARY  
TOWNSHIP 6 NORTH, RANGE 15 WEST.

These notes furnished by the Dept.  
of Water and Power, and checked at  
United States Cadastral Engineer's Office, Glendale  
by A.C. Johnson and A.J. Baritell.

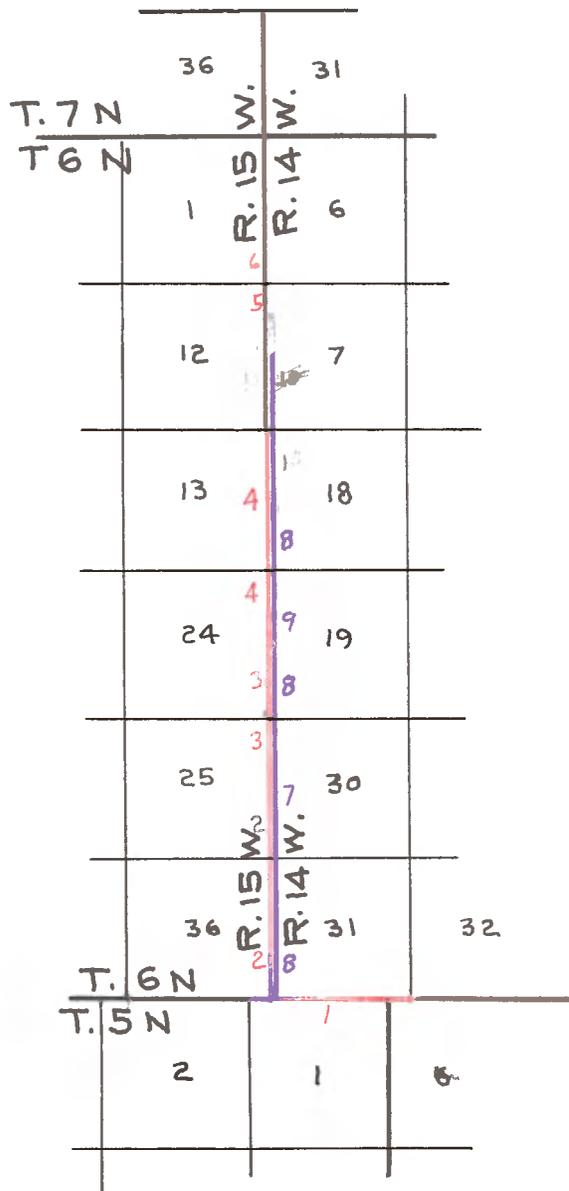

- Norway - 1884
- Goldsworthy - 1877
- Pearson - 1901

Surveyed by J. Goldsworthy, D. S.  
Contract of Aug. 18, 1877.

T. 6 N., R. 14 W., S.B.M.  
South on West Bdy. of Sec. 7 from the  $\frac{1}{4}$  Sec. Cor.

Var. 14° 15' East

x x x x x x x x

40.00 To corner to Secs. 7, 12, 13, 18, Set 4 x 4 elder post,  
4 ft. long with charred stake on S. side, 1 ft. in  
ground, and raised mound of earth,  $4\frac{1}{2}$  ft. in dia. and  
2 ft. high, with pits, 18 in. sq., & 12 in. deep.  
Land gently descending. Soil 2d rate.

---

Surveyed by W. H. Norway, D. S.  
Contract of Oct. 19, 1879.

1st. Std. N. on S.B. of T. 6 N., R. 14 W., S.B.M.

West on S.B. of Sec. 31.

Var. 14° 25' E.

x x x x x x x x

80.00 Set stone 10 x 20 x 16 in stone md.  $4\frac{1}{2}$  ft. in dia. at  
base by 2 ft. in height for std. cor. to Tps. 6 N.,  
Rs. 14 & 15 W.

Land mountainous. Soil 1st & 2d rate. Timber & under-  
growth of oak & cedar.

Oct. 30, 1879.

---

Surveyed by W. H. Norway, D. S.  
Contract of Aug. 25, 1884.

E. B. T. 6 N., R. 15 W., S. B. M.

From the old corner to Sections 7, 12, 13 and 18, on  
E. B. of Tp., where  $\frac{1}{4}$  find a post lying on the ground near  
an earth mound and traces of pits in each section and to  
reestablish which I set a post 4 ft. long, 4 ins. square,  
with marked stone, 12 ins. in the ground, marked T 6 N S  
7 on northeast, R 14 W S 18 on southeast, R 15 W S 13 on  
southwest and S 12 on northwest faces, with 4 notches on  
south and 2 notches on north edges; in old mound, which I  
rebuild, making it 2 ft. high  $4\frac{1}{2}$  ft. base; also redig pits  
making them 18 x 18 x 12 ins. in each section  $5\frac{1}{2}$  ft. dis-  
tant and destroy old post. I run  
South on a random line on east boundary.

Variation 14° 40' East

I set temporary  $\frac{1}{2}$  mile and mile corners at each 40 and 80 chains and at 4 miles, 32 links arrive at a point 192 links west of old standard corner to Tp. 6 north ranges 14 and 15 west, which is a stone set firmly in the ground marked S C with 6 notches on north east and west edges; with a stone mound alongside.

I destroy old mound and at point of intersection of range line with standard line, reset for standard corner to Tps. 6 north, ranges 14 and 15 west, and raised a stone mound alongside. Pits impracticable.

Thence I run

North on a true line between Sections 31 and 36.

Variation 14° 30' East

Ascend slope at an angle of 29°

40.04 Set a post 3 ft. long, 3 ins. square, 12 ins. in the ground for  $\frac{1}{4}$  section corner, marked  $\frac{1}{4}$  S. on west face, from which bears

Oak 8 ins. dia. S.  $38\frac{1}{4}$  West 82 links distant, marked  $\frac{1}{4}$  S B T

No other tree within limits, raised a stone mound around post. Pits impracticable.

67.30 Top of ridge bears east and west and descend slope at an angle of 17°

80.08 Set a granite stone 20 x 20 x 10 ins., 15 ins. in the ground for corner to Sections 25, 30, 31 and 36, marked with 1 notch on south and 5 notches on north edges; and raised a stone mound alongside.

Pits impracticable.

Land mountainous. Soil third rate. Timber of oak, scattering. Dense undergrowth of chaparral.

-----  
North on a true line between Sections 25 and 30.

Variation 14° 27' East.

Descend slope at an angle of 17°/

- 16.00 Cross ravine, 20 links wide, course east and ascend slope at an angle of  $10^{\circ}$
- 37.50 Top of ridge, bears northeast and southwest and descend slope at an angle of  $14^{\circ}$
- 40.04 Set a post, 3 ft. long, 3 ins. square, 12 ins. in the ground for  $\frac{1}{4}$  section corner marked  $\frac{1}{4}$  S on west face, from which bears  
Oak 10 ins. dia. north  $31^{\circ}$  east 16 links distant, marked  $\frac{1}{4}$  S B T  
No other tree within limits, raised a stone mound around post. Pits impracticable.
- 80.08 Set a granite stone 30 x 16 x 10 ins., 22 ins. in the ground for corner to Sections 19, 24, 25 and 30, marked with 2 notches on south and 4 notches on north edges and raised a stone mound alongside. Pits impracticable. Land mountainous. Soil second and third rate. Timber of oak, scattering, Dense undergrowth of chaparral.

-----

North on a true line between Sections 29 and 24.

Variation  $14^{\circ} 23'$  East.

Descend.

- 16.30 Cross creek, 6 links wide, course southwest and ascend slope at an angle of  $20^{\circ}$
- 40.04 Set a post 3 ft. long, 3 ins. square, with marked stone 12 ins. in the ground, for  $\frac{1}{4}$  section corner, marked  $\frac{1}{4}$  S on west face and raised a stone mound covered with earth around post.
- 48.60 Top of spur, bears northeast and southwest and descend slope at an angle of  $20^{\circ}$
- 72.00 Cross ravines, 10 links wide, course southwest and ascend slope at an angle of  $16^{\circ}$
- 80.08 Set a post 4 ft. long, 4 ins. square, with marked stone 12 ins. in the ground for cor. to Secs. 13, 18, 19, 24, marked T 6 N S 18 on northeast, R 14 W S 19 on southeast, R 15 W S 24 on southwest and S 13 on northwest faces,

with 3 notches on north and south edges; and raised a stone mound around post. Pits impracticable. Land mountainous. Soil third rate. Timber of oak and dense undergrowth of manzanita and chaparral.

-----  
North on true line between sections 13 and 18.

Variation 14° 12' East

Ascend

22.00 Top of ridge bears east and west and descend slope at an angle of 25°

40.04 Set a post 3 ft. long, 3 ins. square, with marked stone 12 ins. in the ground for  $\frac{1}{4}$  section corner, marked  $\frac{1}{4}$  S on west face and raised a mound of stone around post. Pits impracticable.

80.08 The corner to Sections 7, 12, 13 and 18. Land mountainous. Soil third rate. Dense undergrowth of chaparral. x x x x x

October 4, 1884.

-----  
Surveyed by Geo. W. Pearson, D. S.  
Contract of Apr. 8, 1901

Resurvey of the First Standard Parallel North, through Range 14 West, S. B. M.

West on a random line on south boundary of Section 31.

X X X X X X X

At 81.97 chains the Standard corner of Township 6 North Ranges 14 and 15 west, bears north 20 links, which is a schist stone 18 x 6 x 5 inches in a mound of stone, marked S C on north with 6 grooves on northeast and west faces, in addition, I marked this stone T 6 N on N., R 14 W on E., and R. 15 W. on W. faces, and raise a mound of stone, 4 feet base, 2 feet high, north of corner.

Vol. 215 - 20:15

W Bdy. - T.6.N., R.14.W.

Retracing.

From the old 1/4 Sec. corner between 7 and 12 which is a decayed post lying on the ground near an earth mound from which bears elder 5" diam. N.  $9\frac{1}{4}^{\circ}$  W. 55 lks. dist. marked 1/4 S.B.T.,

and to reestablish which after destroying old post I set a post 3' long, 3" square 12" in ground marked 1/4 S on W. face in old mound which I rebuilt making it 1 1/2 ft high 3 1/2 ft base with pits N. and S. 5 1/2 ft. distant which I redig making them 18 x 18 x 12 in.

I run

North on a true line between Secs. 7 and 12. Var.  $14^{\circ}40'$  E.

Descend.

- 15.00 Cross mouth of ravine. Course E.
- 22.50 To foot of mountain, bears E. and W. Ascend slope angle  $32^{\circ}$
- 25.00 Find no trace of old witness corner. To Sections 1,6,7,12 and continue North
- 40.00 Set a post 4' long, 4" square with marked stone 12" in ground for corner to Sections 1,6,7,12 marked

T.6.N.S 6 on N.E.

R. 14 W. S 7 on S.E.

R. 15 W. S 12 on S.W.

S. 1 on N.W. faces with 1 notch on north and 5 notches on S. edges and raised stone mound around post.

Pits impracticable.

Land mountainous

Soil 2nd rate

Timber of oak and elder, scattering dense undergrowth of chaparral.

- - - - -

W. Bdy. - T. 6 N., R. 14 W.

Retracing

North on a true line between Secs. 1 and 6; Var.  $14^{\circ}35'$  E.

Ascend slope at an angle of  $30^{\circ}$

20.00 Summit of high divide between San Francisco Canyon and Elizabeth Lake bears E. and W.

And descend slope at an angle of  $26^{\circ}$ .

40.00 Set a granite stone 20 x 12 x 12 inches, 15 inches in ground for  $1/4$  Sec. corner marked

$1/4$  on W. face and raised a stone mound alongside.

Pits impracticable

79.68 Set a post  $4\ 1/2$  ft long, 4" square with marked stone 12 inches in ground for corner to T. 6 and ~~7~~ N., R. 14 and 15 W. marked

T. 7 N. S 31 on N.E.

R. 14 W. S 6 on S.E.

T. 6 N. S 1 on S.W.

R. 15 W. S 36 on N.W. faces with 6 notches on each edge and raised stone mound around post.

Pits impracticable

Land mountainous

Soil 3rd rate

Timber oak and elder scattering

Dense undergrowth of same

Manzanita, chemisal and chaparral.

W. H. Norway

Contract Oct. 4, 1884.

Surveyed by S.W. Pearson, D.S.  
Contract of April 8, 1901.

Re-survey of the boundary of T. 6 N., R. 14 W., S. B. M.

Thence I run

North on a random line on W. bdy of the township setting temporary  $\frac{1}{4}$  section corners and section corners at intervals of 40.00 chains after a careful search and failing to find the missing corners, at 160.00 chains I find the corner of sections 19, 24, 25 and 30, which is a mound of stone and earth, 3 feet base, 1 ft. high without post or marked stone; I destroy this corner and reestablish it at the same point, as follows:

Set a sandstone 16 x 6 x 6 inches, 12 inches in the ground for corner to sections 19, 24, 25 and 30, marked with 2 notches on S. and 4 notches on N. edges; and raise a mound of stone covered with earth 4 ft. base,  $1\frac{1}{2}$  ft. high, W. of corner.

Thence I run

South on a true line between sections 25 and 30.

Through dense brush; descend

10.00 Cross gulch, 16 links wide, 150 ft. below section corner course N.W. and ascend

23.00 Top of spur, 400 ft. above gulch, bears N.W. Descend

26.30 Cross gulch, 16 links wide, 80 ft. below spur; course N.W. Ascend abruptly.

32.00 Top of spur 200 ft. above gulch, bears N.W. descend

36.00 Gulch, 15 links wide, course NW. ascend

40.00 Set a sandstone 14 x 10 x 8 inches, 10 inches in the ground for  $\frac{1}{4}$  section corner, marked  $\frac{1}{4}$  on W face; and raised a mound of stone covered with earth 4 ft. base, 2 ft. high, W. of corner.

60.00 Top of spur 200 ft. above gulch, bears W. descend

66.00 Cross head of gulch, 100 ft. below spur, course W. Ascend.

80.00 Set a sandstone 14 x 12 x 9 inches, 10 inches in the ground for corner of sections 25, 30, 31 and 36, marked with 1 notch on S and 5 notches on N edges; and raise a mound of stone covered

Re-survey of the boundary of T. 6 N., R. 14 W., S. B. M.

with earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft high W. of corner.

Land mountainous. soil third rate. No timber

Undergrowth 80.00 chains of chaparral. Mountainous land  
80.00 chains.

-----

South on a true line between sections 31 and 36.

Through heavy chaparral. Ascend.

23.00 Top of ridge, bears E. and W. Descend

40.00 Set a Feldspar stone 18 x 12 x 10 inches, 12 inches in the  
ground for  $\frac{1}{4}$  section corner, marked  $\frac{1}{4}$  on W face; and raised  
a mound of stone, 4 ft. base, 2 ft. high W. of corner.

Pits impracticable.

80.00 Standard corner of T. 6 N., Rs. 14 and 15 W.

Land mountainous. Soil third rate. No timber.

Undergrowth 80.00 chains dense chaparral. Mountainous land  
80.00 chains.

July 19, 1901.

-----

From cor. to secs. 19, <sup>2</sup>24, 25 & 30

Thence I run north on a random line on W. bdy. of the township  
setting temporary  $\frac{1}{4}$  section corner and section corner where  
found missing at intervals of 40.00 chains; at 120.00 chains  
intersect the  $\frac{1}{4}$  section corner between sections 13 and 18,  
which is a stone mound  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, no trace of  
the post could be found; I remove the corner and reestablish  
it at the same point as follows:

Set a granite stone 18 x 7 x 6 inches, 12 inches in the ground  
for  $\frac{1}{4}$  section corner, marked  $\frac{1}{4}$  on W face; and raised a mound  
of stone covered with earth  $3\frac{1}{2}$  ft. base,  $1\frac{1}{2}$  ft. high, W. of corner.

Thence I run

South on a true line between sections 13 and 18

Through brush; descend

Re-survey of the boundary of T. 6 N., R. 14 W., S. B. M.

- 4.00 Cross gulch, 30 links wide, course N.W. Ascend abruptly.
- 15.75 Top of high ridge bears E and W. Descend abruptly.
- 40.00 Set a granite stone 12 x 8 x 8 inches, 10 inches in the ground, for corner to sections 13, 18, 19 and 24, marked with 3 notches on N. and S. edges; and raised a mound of stone covered with earth 4 ft. base, 1½ ft. high, W. of corner.
- Land mountainous. Soil third rate. Timber a few scattering scrub oak. Undergrowth 40.00 chains of heavy chaparral. Mountainous land 40.00 chains.
- 
- South on a true line between sections 19 and 24.  
Through brush; descend
- 20.00 Begin steep descent over point of spur bearing S.
- 40.00 The point for ¼ section corner, falls on rock in place 4 x 4 x 3 ft. above ground on which I cut a cross (X) at the exact corner point for ¼ section corner marked ¼ on W face; and raised a mound of stone 3½ ft. base, 2 ft. high W. of corner. Pits impracticable.
- 40.50 Cross gulch, 40 links wide, 800 ft. below section corner course SW. Ascend.
- 47.50 Top of spur 120 ft. above gulch, bears SW.; descend
- 68.50 Cross gulch, 30 links wide, 400 ft. below spur; course W. ascend.
- 79.50 Top of spur 300 ft. above gulch, bears N.W., descend.
- 80.00 The corner of sections 19, 24, 25 and 30.
- Land, rough mountainous. Soil, third rate. No timber. Undergrowth 80.00 chains chaparral. Mountainous land 80.00 chains.

July 18, 1901.

-----

I re-run the north one-half of the line between sections 13 and 18 of the west boundary in order to locate an error in closing of the lines around section 18.

Re-survey of the boundary of T. 6 N., R. 14 W., S. E. M.

(From corner to sections 7, 12, 13 and 18, I run South  
on a random line between sections 13 and 18.

41.00 To a point 3.70 chains W. of the  $\frac{1}{4}$  section corner.

Thence I run

N. 5° 9' W. on a true line between sections 13 and 18.

Through dense brush; ascend

2.25 Top of spur bears N. E.

Thence descend abruptly over north slope of mountain.

41.17 The corner to sections 7, 12, 13 and 18.

Land rugged mountains. Soil rocky fourth rate.

Timber a few scattering live oak. Undergrowth 41.17

chains dense chaparral. Mountainous land, 41.17 chains.

July 31, 1901.

-----