ASPLUNDH CONSTRUCTION CORP.

SOUTHERN CALIFORNIA EDISON
An EDISON INTERNATIONAL Company

# DETERIORATED POLE REPLACEMENT

**CIRCUIT (S):**
GREEN VALLEY 4KV o/o GREEN VALLEY P.T. SUB

STA'S
3-4

**ADDRESS:**
**LOCATION:** SAN FRANCISQUITO CANYON RD N/S 2300' E/O FOREST SEVICE RD 7N02
**CITY:** LEONA VALLEY
*** NOTES:** HELICOPTER SET REQ'D
BULLETIN 322

SP475

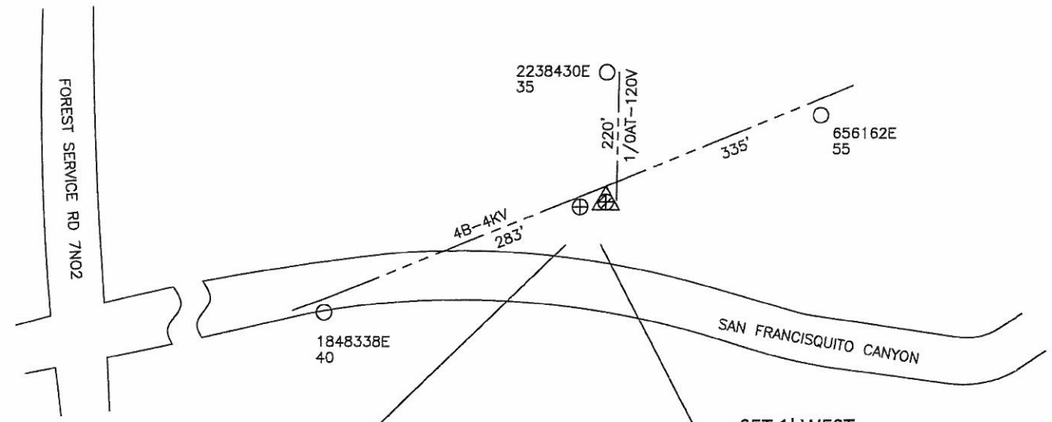


**TRANSFER (S):**
2/C 4B-4KV (NE/SW)
1-1/0AT-120V
1-NETCOMM RADIO

**3** RM 656163E
55' Class C3
RM: 1- POLE 55' CLASS 3 WOOD FULL TREAT
RM: 1- TR OH 10KVA 2.4KV 120/240 1P
SN: _____
RM: 1- FE CO OPEN 100A 4KV 1-EA
RM: 1- XA SNGL FB 10' STEEL PINS
RM: 2- INS GLASS & PIN 4KV
RM: 1- SEC ROLLER (166-CLEVIS & SPOOL)
RM: 1- AG DOWN GUY 9/32" - 50' LESS THAN 22.5KV
RM: 1- GR OH #6 SOL WP SECONDARY W/ROD

SET 1' WEST
POLE 656163E **4**
50' Class C4
IN: 1- POLE 50' CLASS 4 WOOD FULL TREAT
IN: 1- TR OH 25KVA 2.4KV 120/240 1P
SN: _____
IN: 1- FE CO MNT FOR ELF 100A 2.4KV 1-EA
IN: 1- FE FUSE ELF 8KV 25A
IN: 1- XA SNGL FB 10' STEEL PINS
IN: 2- INS POLY W/PIN 12KV CLMP #6-4/0 CU
IN: 1- SEC ROLLER (166-CLEVIS & SPOOL)
IN: 1- AG DOWN GUY 9/32" - 50' LESS THAN 22.5KV
IN: 1- GR OH #6 SOL WP SECONDARY W/ROD

N
NOT TO SCALE

| PERMIT REQ'D. | |
|---|---|
| CALTRANS: | |
| ENCROACHMENT: | |
| RAILROAD: | |
| HELICOPTER: | X |
| OTHER: | |

SPEED LIMIT NA

PEDESTRIAN TRAFFIC CONTROL REQUIRED
☐ YES ☒ NO

GPS: LAT: N 34° 36' 51.2"
LONG: W 118° 25' 52.6"

TLM DATA:

| | SIZE | KVA | CUST. | % LOAD |
|---|---|---|---|---|
| EXIST | 10 | 2.14 | 1 | 21.4 |
| PROP. | 25 | 2.14 | 1 | 8.5 |

VOLTAGE DROP _____ %
PRI. CIRC. GREEN VALLEY 4KV

| NOTES | |
|---|---|
| JOINT POLE: | X |
| RENTER: | X |
| MITC FUME: | |
| JOINT MEET: | |
| TRUCK ACCESS: | |
| HAND SET: | |
| CONTACT CATV: | |
| ENVIRONMENTAL: | |
| REAL PROP. REVIEW: | |
| PAVEMENT REPAIR: | |
| ☐ CONCRETE ☐ ASPHALT | ____X____ |

| | | | |
|---|---|---|---|
| DISTRICT 36 – ANTELOPE VALLEY | PROJ. MGR. RODRIGUEZ, JOHN T PHONE 909-469-0219 | PLANNER HAUPT, KYLE PHONE 714-893-2405 | |
| FOREMAN | TRUCK NO. / P/E / INVENTORY MAP NO. 132-62 | THOMAS GUIDE LA 4192-B3 / GRID NO. | DESIGN NO. 551319_0.01 |
| CSD 140 Y___ N___ | BY-PASS CODE / EXISTING _____ CHANGE TO _____ | TLM CHECKED _____ %LOAD | J.P.A. NO. 406190157 / ASSOCIATED DESIGN NO. |
| PRODUCT/SAP NO. 787014-INFRA REP - DET POLE RELACE | PRODUCT/SAP NO. | PRODUCT/SAP NO. | |

PROPOSED CONSTRUCTION (LOCATION)
DETERIORATED POLE REPLACEMENT
VARLOC VARIOUS ANTELOPE VALLEY CA 93534
ANTELOPE VALLEY

| TYPE | APPROVED BY | DATE | CHECKED BY | DRAWN BY | PAX # |
|---|---|---|---|---|---|
| | | | | | |

Southern California Edison Company

SHEET _____ OF _____
JOB NO. 551319_0.01