152

3937

VICINITY MAP

TLM DATA:	805112E			
	SIZE	kVA	CUST	%LOAD
EXIST:	37.5	70.8	30	188.8
PROP:	50	31.9	16	63.8
VD= NA		FLICKER= NA		

NOTES:

- CREW TO INSTALL TRANSFORMER TO BREAK UP LOAD
- INSTALL SECTIONALIZERS ON WEST SIDE OF POLE 805112E
- CREW TO REPLACE OVER LOADED TRANSFORMER

EXISTING 805112E (1)
60' Class 2
RM: 1- TR OH 37KVA 4KV 120/240 1P
SN: _____
RM: 1- FE CO OPEN 100A 4KV 1-EA
IN: 1- TR OH 50KVA 2.4KV 120/240 1P
SN: _____
IN: 1- FE CO OPEN 100A 4KV 1-EA
IN: 1- SEC 2 SEC SECTIONALIZING LINK 6-4/0

EXISTING 4405081E (2)
60' Class 2
IN: 1- TR OH 50KVA 2.4KV 120/240 1P
SN: _____
IN: 1- FE CO OPEN 100A 4KV 1-EA

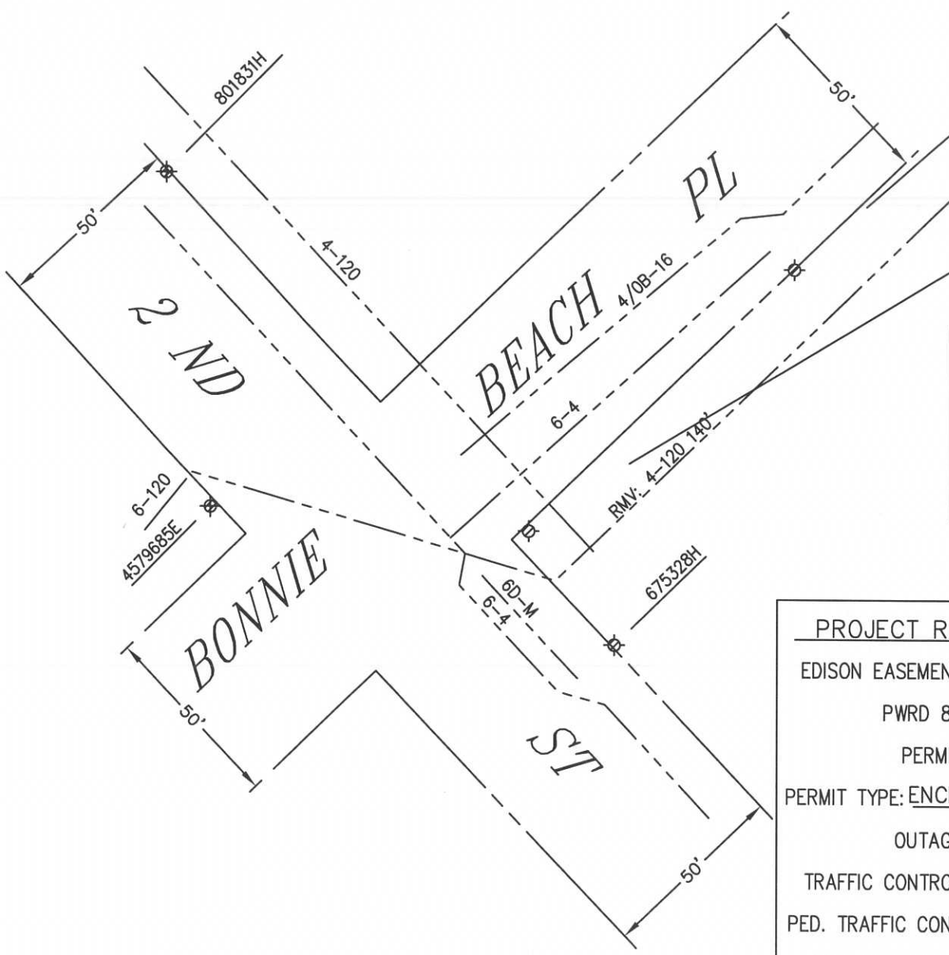

TLM DATA:	4405081E			
	SIZE	kVA	CUST	%LOAD
EXIST:	NA	NA	NA	88
PROP:	50	44.3	14	88
VD= NA		FLICKER= NA		

SOUTHERN CALIFORNIA EDISON
An EDISON INTERNATIONAL Company

SCALE: 1" = 40'
0 40 80

BROOKLYN 4KV O/O BELVEDERE SUB

PROJECT REQUIREMENTS	
EDISON EASEMENT REQUIRED	N
PWRD 88 REQUIRED	N
PERMIT REQUIRED	Y
PERMIT TYPE: ENCROACHMENT	
OUTAGE REQUIRED	Y
TRAFFIC CONTROL REQUIRED	Y
PED. TRAFFIC CONTROL REQ'D	N
CONVEYANCE LETTER REQ'D	N

DISTRICT 22 - MONTEBELLO	PROJ. MGR. ALATORRE, ELDA M PHONE 323-720-5214	PLANNER ALATORRE, ELDA M PHONE 323-720-5214	
FOREMAN	TRUCK NO. / P/E	INVENTORY MAP NO. 124-4233-1 / THOMAS GUIDE / GRID NO.	DESIGN NO. 610558_0.01
CSD 140 Y___ N___	BY-PASS CODE / EXISTING ___ CHANGE TO ___	TLM CHECKED ___ %LOAD / J.P.A. NO.	ASSOCIATED DESIGN NO.
PRODUCT/SAP NO. 876203-PREVENTIVE MAINT (INSPECTION DRIVEN)	PRODUCT/SAP NO.	PRODUCT/SAP NO.	

TYPE	APPROVED BY	DATE	CHECKED BY	DRAWN BY	PAX #

PROPOSED CONSTRUCTION (LOCATION)
REPLACE OVER LOADED PRI XFMR-D
XS BONNIE BEACH PL & 2ND ST
EAST LOS ANGELES CA 91754

Southern California Edison Company

SHEET 1 OF 1 | JOB NO. 610558_0.01