(P) 4.7.14 (T)

PERMIT NEEDED

EAST LOS ANGELES / LA CO

HAMMILL 16kV O/O REPTTO SUB

AT CURB N. SIDE E. EAGLE ST.
52' W/OF S. MC BRIDE AVE
ON S/SIDE OF ADD.
471 S. MC BRIDE AV.

(12) POLE 4445421E
45' Class C2
IN: 1– POLE 45' CLASS 2 WOOD FULL TREAT
IN: 1– XA SNGL FB 10' STEEL PINS
IN: 1– XA SNGL FB 10' STEEL PINS SECONDARY
IN: 2– INS POLY W/PIN 16KV CLMP #4–653 ACSR
IN: 2– SEC ROLLER (166–CLEVIS & SPOOL)
IN: 1– SEC 2" PVC FOR UNDER ARM W/#2 TW
IN: 2– SEC STEEL PIN & INS – PHASE
IN: 1– SEC STEEL PIN & INS – NEUTRAL
IN: 1– GR OH #6 SOL WP SECONDARY W/ROD
IN: 2– FE CO OPEN 100A 16KV 1–EA
IN: 1– TR OH 100KVA 16KV 120/240 1P
SN:_____

(11) RM 85096H
40' Class C5
RM: 1– POLE 40' CLASS 5 WOOD FULL TREAT
RM: 1– XA SNGL FB 10' STEEL PINS
RM: 1– XA SNGL FB 10' STEEL PINS SECONDARY
RM: 2– INS GLASS & PIN 16KV CLMP #4–336 ACSR
RM: 1– SEC ROLLER (166–CLEVIS & SPOOL)
RM: 1– SEC 2" PVC FOR UNDER ARM W/#2 TW
RM: 2– SEC STEEL PIN & INS – PHASE
RM: 1– SEC STEEL PIN & INS – NEUTRAL
RM: 1– SEC END ARM RACK WITH 3 SPOOL RACK
RM: 1– GR OH #6 SOL WP SECONDARY W/ROD
RM: 2– FE FH CO ALL SIZES 200A OR LESS 16KV
RM: 1– TR OH 50KVA 16KV 120/240 1P
SN:_____

CONC.

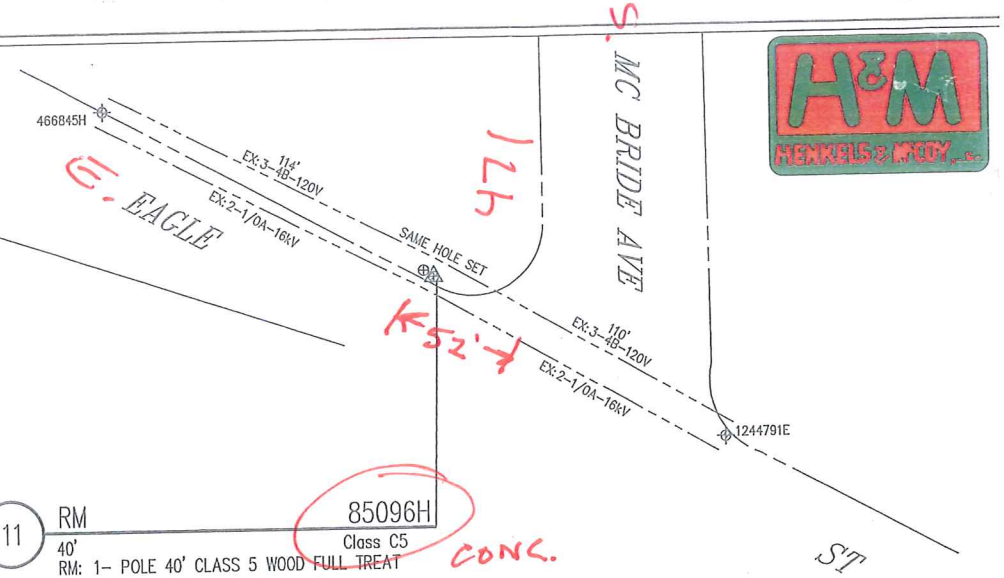

TRANSFERS:
2– 1/0A 16kV (E&W)
3– 4B 120V (E&W)
3– 4AT SVC
1– 6' MAST ARM ST/LT

*SAME HOLE SET DUE TO COM/SPLICE BOX
SET IN SAME HOLE Y OR SET___ ___ HARD SET N

ENVIRO REVIEW	N	HAND SET	N	SPECIAL EQUIP NEEDED	N
JOINT MEET	N	PERMIT NEEDED	Y	IF YES WHAT IS NEEDED?	
TRUCK ACCESS	Y	NETCOMM SHEET	N		
PAVEMENT REPAIR	Y	RIGHTS CHECK	N	EST. TIME TO REPLACE	
ASPHALT		PED TRAFFIC CONTROL	Y	48 MH	
CONCRETE	Y	OUTAGE	Y	CONTACT CATV	N
REPAIR SIZE	3x3	CSD–140	Y	MITC POLE	N

GPS
34°–01'–45.5"
118°–10'–02.6"

TLM DATA:	4445421E			
	SIZE	kVA	CUST	%LOAD
EXIST:	50	87.2	19	174.4
PROP:	100	70.3	19	70.30
VD= N/A		FLICKER= N/A		

NOT TO SCALE

SOUTHERN CALIFORNIA EDISON
An EDISON INTERNATIONAL Company

DISTRICT 22 – MONTEBELLO	PROJ. MGR. RODRIGUEZ, JOHN T. PHONE 909–469–0219		PLANNER CARRILLO, CHRIS PHONE 909–322–5429		
FOREMAN	TRUCK NO.	P/E	INVENTORY MAP NO. 122–4236–1	THOMAS GUIDE 635 F7	GRID NO.
CSD 140 Y___ N___	BY–PASS CODE	EXISTING ___ CHANGE TO ___	TLM CHECKED 70.30 %LOAD	J.P.A. NO. E 6022 000405842689	
PRODUCT/SAP NO. 698638 - DET POLE REPLACEMENT	PRODUCT/SAP NO.				

DESIGN NO. 490366_0.01
ASSOCIATED DESIGN NO.
PRODUCT/SAP NO.

PROPOSED CONSTRUCTION (LOCATION)
4532 EAGLE ST
EAST LOS ANGELES

TYPE	APPROVED BY	DATE	CHECKED BY	DRAWN BY	PAX #

Southern California Edison Company

SHEET ___ OF ___
JOB NO. 490366_0.01

17.

POLE NO.	Pole Length / Anchor Size	Year Set	Pole Trt / Class / Anchor Direct.	Record 120V E	Record HLA	Record	Record	Proposed 120K V E	Proposed HLA	Proposed	Proposed	Proposed	Item No.	LOCATION AND NATURE OF WORK If not in accordance with Joint Pole agreement and routine-state reasons.	
														E TO REPLACE PER SEC. 7.11, 7.4, 19.6, 14.3	1
85096H	40	1936	FT 5	.50	23'			C-5	LTD					EAGLE ST N/S 45' W/O MCBRIDE ST, LOS ANGELES	2
								1/2(1)					5C	TOP POLE	3
								1/2(1)				3X3	10C	CONCRETE REPAIR	4
															5
85096H	45		FT 2					39-10	23-5					EAGLE ST N/S 45' W/O MCBRIDE ST, EAST LOS ANGELES	6
									TN 23						7
								1/2(1)					19A		8
								1/2(1)					15B	VIS STRIPS	9
															10
				4KV				4KV						E TO REPLACE PER SEC. 7.11, 10.8, 19.4	11
7405E	45	1932	FT 5	34-8	20-1			PTD						RECORD AV P/L E, 235' N/O EAGLE ST, EAST LOS ANGELES	12
								1					78A	CATV	13
															14
7405E	40		FT 5					34-8	20-1					RECORD AV P/L E, 234' N/O EAGLE ST, EAST LOS ANGELES	15
														HARD SET SOUTH	16
								1/2(1)					13B	FENCE	17
															18
															19

OLE LEGEND:
= PULL (Item 5A)
3 = PULL BUTT
= TRANSPORT (Item 5B)
= SALVAGE
= DISPOSE (Item 5D)
N = TENANT

L = LOWER TOP(Item 5E)
C(XX) = FOOTAGE CUT
SCZ = SAFETY CLEARANCE ZONE

ANCHOR/ARM LEGEND:
AR = ANCHOR/ARM REMOVED
AT = ANCHOR/ARM TRANSFERRED

Show Quantity of Items to be billed in the Column of Party to be Paid.

GEOGRAPHICAL LOCATION

EAST LA
COMMUNITY

Rev. Jul 2013