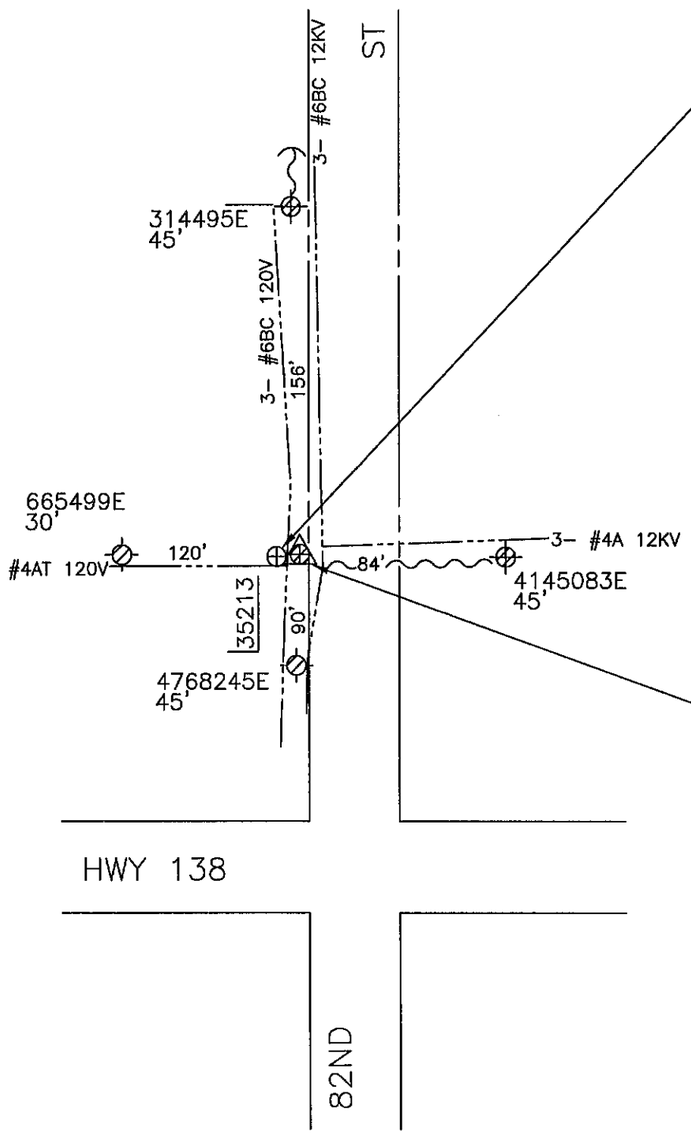


IN 314494E (4)
45' Class C2

IN: 1- POLE 45' CLASS 2 WOOD FULL TREAT
IN: 2- XA SNGL FB 10' STEEL PINS
IN: 3- INS POLY & ANGLE PIN 12KV CLMP #4-336
IN: 3- INS POLY DE 12KV HOT SHOE #4 & 1/0 (BOLTED)
IN: 1- INS POLY W/PIN 12KV CLMP #4-653 ACSR
IN: 1- XA SNGL FB 10' STEEL PINS SECONDARY
IN: 2- SEC STEEL PIN & INS - PHASE
IN: 1- SEC STEEL PIN & INS - NEUTRAL
IN: 2- SEC ROLLER (166-CLEVIS & SPOOL)
IN: 1- SEC 1" PVC FOR UNDER ARM W/#8 TW WIRE
IN: 1- AG SPAN GUY 7/32" - 200'
IN: 1- MISC AVIAN HOOD FOR HENDRIX INSUL #4-653

RM 314494E (3)
40' Class C5

RM: 1- POLE 40' CLASS 5 WOOD FULL TREAT
RM: 2- XA SNGL FB 10' STEEL PINS
RM: 7- INS GLASS/POLY 35KV & LESS
RM: 1- XA SNGL FB 8' STEEL PINS SECONDARY
RM: 2- SEC STEEL PIN & INS - PHASE
RM: 1- SEC STEEL PIN & INS - NEUTRAL
RM: 1- SEC ROLLER (166-CLEVIS & SPOOL)
RM: 1- SEC 2" PVC FOR UNDER ARM W/#2 TW
RM: 1- AG SPAN GUY 7/32" - 200'
SET HARD WEST
E TO CUT 10'
TEL TO PTD

SOUTHERN CALIFORNIA EDISON
An EDISON INTERNATIONAL Company

NOT TO SCALE

NOTE TO CREW:
TRANSFER:
3- #6BC 12KV
3- #4A 12KV
3- #6BC 120V
1- #4AT 120V
2- #4AT SVCS
1- ST LT

NOTES:

CIRCUIT: CALIBER 12KV
SUB: PALMDALE
CIRCUIT:
SUB:
REAR PROPERTY NO
TRUCK ACCESS YES
HAND DIG NO
TRAFFIC CONTROL NO
PTC NO
ROUTE #
BULLETIN 322 YES
ENVIRONMENTAL NO
PERMIT REQ'D NO
TYPE
TREE TRIMMING NO
CONCRETE REPAIR REQ'D NO
CRANE SET NO
GPS:
LAT: 34° 31' 18.3"
LON: 117° 59' 01.6"
ELEV: 2889'

UNDERGROUND SERVICE ALERT
Dial 811
Call USA
For Underground Locating
2 Working Days Before You Dig

| | | | | | |
|---|---|---|---|---|---|
| DISTRICT 36 - ANTELOPE VALLEY | PROJ. MGR. JOHN T. RODRIGUEZ PHONE (714) 973-5678 | | PLANNER RAND TAYLOR ( HWI) PHONE (951) 826-8853 | | |
| FOREMAN | TRUCK NO. | P/E | INVENTORY MAP NO. 120-86 | THOMAS GUIDE 4377 H1 | GRID NO. 000 | DESIGN NO. 498926_0.01 |
| CSD 140 Y ___ N X | BY-PASS CODE | EXISTING ___ CHANGE TO ___ | TLM CHECKED ___ %LOAD | J.P.A. NO. E6036-405530653 | ASSOCIATED DESIGN NO. |
| PRODUCT/SAP NO. 710787-INFRASTRUCTURE REPLACEMENT - DET POLE REPLACEMENT | | | PRODUCT/SAP NO. | | PRODUCT/SAP NO. |

| TYPE | APPROVED BY | DATE | CHECKED BY | DRAWN BY | PAX # |
|---|---|---|---|---|---|
| | | | | HWI/ D.M. | |

Southern California Edison Company

PROPOSED CONSTRUCTION (LOCATION)
TD 710787
35213 82ND ST
LITTLEROCK

SHEET ___ OF ___
JOB NO. 498926_0.01