

EXHIBIT B



A-Tech Consulting, Inc.

1640 N. Batavia Street, Orange, CA 92867
Phone (714) 434-6360 Fax (714) 221-6360
www.atechinc.net

COMPREHENSIVE ASBESTOS, HAZMAT & XRF-LEAD ASSESSMENT

High Desert Hospital

44900 60th Street West, Various Buildings, Interior and Exterior

City of Lancaster
County of Los Angeles
State of California

Project Number: Atch-211061

June 23, 2021

PREPARED FOR:

County of Los Angeles, Department of Public Works

PRIVILEGED & CONFIDENTIAL

This report is intended for the sole use of the County of Los Angeles, Department of Public Works. The use or re-use of this document or the findings, conclusion or recommendations presented therein, by any other party or parties are at the sole risk of said user.

Cover

ASBESTOS

Table of Contents

I. Executive Summary

- 1.0 Introduction
- 2.0 Scope of Assessment
- 3.0 Previous Assessment/Historical Data
- 4.0 Visual Inspection and Sampling/Analytical Methodology
- 5.0 Laboratory Accreditation and Analytical Procedures
- 6.0 Asbestos Identification
- 7.0 Building & Material Condition
- 8.0 Recommendations
- 9.0 Limitations

II. Appendices

A. Asbestos Bulk Sample Analysis

B. Diagrams: Asbestos Bulk Sample Locations

C. Digital Photographs

D. Laboratory Reports-Asbestos Analysis of Bulk Materials via EPA 600/R-93/116 Method Using Polarized Light Microscopy and Chain of Custody

E. Inspector Certifications

Atch-211061
Comprehensive Asbestos Assessment
44900 60th Street West
Lancaster, California 93536

June 23, 2021

County of Los Angeles, Department of Public Works
44900 60th Street West
Lancaster, California 93536

Attn: Mr. Gus Bitar

Re: High Desert Hospital
44900 60th Street West, Various Buildings, Interior and Exterior
Lancaster, California 93536

Pursuant to your request, A-Tech Consulting, Inc. (A-Tech) has completed a Comprehensive Asbestos Assessment of the High Desert Hospital located at 44900 60th Street West, in Lancaster, California. The following report summarizes the findings of this inspection. Please direct all questions for this project to A-Tech's CSST or CAC who performed the sampling at (800) 434-1025 or pm@atechinc.net.

1.0 INTRODUCTION

A-Tech was contacted by Mr. Gus Bitar with County of Los Angeles, Department of Public Works to confirm the presence or absence of asbestos in the interior and exterior of various buildings at High Desert Hospital located at 44900 60th Street West, (subject property), in Lancaster, California. The assessment was conducted by Adrian Urbina - CSST #19-6634 under the supervision of Robert Williams - CAC #96-1980 with A-Tech from April 05, 2021 to April 09, 2021, from April 12, 2021 to April 15, 2021, from April 19, 2021 to April 22, 2021, and from April 26, 2021 to April 29, 2021.

2.0 SCOPE OF ASSESSMENT

This comprehensive asbestos assessment was performed to identify visible and/or readily accessible suspect friable and non-friable Asbestos-Containing Building Materials (ACBMs) at a subject property. The intent of this assessment was to satisfy all regulatory requirements for renovation and/or demolition. Friable ACM, as defined by the U.S. Environmental Protection Agency (EPA) and South Coast Air Quality Management District (SCAQMD), Rule 1403, is a material that, when dry, can be easily pulverized, crushed or reduced to powder by hand pressure. Non-friable ACBM that can potentially be broken, crumbled, pulverized or reduced to powder in the course of demolition or renovation activities are classified as Category I or Category II, non-friable ACBM. These assessments are typically accomplished by, and limited to, an in-depth site reconnaissance, a review of readily available building records, and a review of readily available asbestos Operation and Maintenance (O&M) plans. In the event that suspected or known ACBMs exist at a given site, samples of the potential ACBMs may be collected for subsequent laboratory analysis.

This Comprehensive Asbestos Assessment was conducted in accordance with the scope of services authorized by Mr. Gus Bitar with County of Los Angeles, Department of Public Works in accordance with current regulatory guidelines.

3.0 PREVIOUS ASSESSMENT/HISTORICAL DATA

No prior asbestos related documentation for the subject property was reviewed or made available.

4.0 VISUAL INSPECTION AND SAMPLING/ANALYTICAL METHODOLOGY

To identify suspect friable and non-friable ACBM, as required under California law, a California Occupational Safety Health Administration (CAL-OSHA) Certified Site Surveillance Technician (CSST) and/or Certified Asbestos Consultant (CAC) is required to conduct visual and/or bulk assessments of a subject property.

During this assessment, A-Tech identified homogenous areas of suspected ACBMs for purpose of sampling in accordance with current CAL-OSHA/EPA (AHERA) requirements. These areas were defined with respect to similarities in appearance, age, use, type, color, and/or texture. The condition and estimated quantity of the suspected materials were also assessed. Based upon A-Tech Consulting, Inc.'s observations, two hundred and seventy-three (273) homogeneous suspect asbestos containing building materials were identified. Please refer to Appendix A for a complete list of sampled materials.

To evaluate the presence of asbestos in these suspected ACBMs, A-Tech Consulting, Inc. obtained one-thousand forty-six (1,046) bulk samples, which appeared to represent each homogeneous area. However, some of the samples analyzed may have multiple layers of material, which the laboratory is required to separate and analyze independently. The total amount of samples analyzed was two-thousand two-hundred ninety (2,290). Regarding multiple layered materials, if one layer tests positive for asbestos content, the entire sample is considered positive.

Materials containing greater than one-tenth of one percent (>0.1%) asbestos by weight is considered positive in this report and defined as asbestos containing construction material (ACCM), and anything >1% is an asbestos containing material.

Following Asbestos Hazard Emergency Response Act (AHERA) inspection methodology, the inspector identifies each suspect material and categorizes it into one of three established material types: surfacing, thermal system or miscellaneous (See Attached Table: Asbestos Bulk Sample Analysis for Individual Sample Identification). The following describes the characteristics for these three categories:

- *Surfacing material* - means material in a building that is sprayed on, troweled on, or otherwise applied to surfaces such as acoustical plaster on ceilings, fireproofing materials on structural members, or other materials on surfaces for acoustical, fireproofing, or other purposes.
- *Thermal system insulation* - means material in a building applied to pipes, fittings, boilers, breeching, tanks, ducts, or other interior structural components to prevent heat loss or gain, or water condensation, or for other purposes.
- *Miscellaneous material* - means interior building material on structural components, structural members or fixtures, such as floor and ceiling tiles, and does not include surfacing material or thermal system insulation.

Amended water-spray wet methods were used during the collection of each friable sample, such as suspended ceiling tiles. For buildings to be demolished, A-Tech conducts destructive sampling. All sampling was conducted down to stud/joist level. After collecting each sample, the sampling equipment was cleaned with a moist towelette. Each sample was sealed in a sample container and assigned a discrete sample identification number.

4.1 UNIVERSAL WASTE (UW) & HAZARDOUS MATERIALS (HM) INSPECTION

A visual hazardous materials assessment was conducted at this site for components containing Polychlorinated Biphenyls (PCBs), Mercury and other suspect visible hazardous materials. The following report summarizes the findings:

<u>Findings</u>	<u>Quantity and Locations</u>
Mercury Switches	Eight (8) Mercury Switches in the Emergency Power Building and B-7 Trailer
Florescent Light Bulbs	Six Hundred (600) Florescent Light Bulbs throughout the Main Hospital Building and B1-B13 Trailers
Mercury Bulbs	Four-Hundred Fifty (450) Mercury Bulbs throughout the Main Hospital Building and B1-B12 Trailers
HVAC Package Units	Ten (10) throughout the Main Hospital Building and fourteen (14) at the Exterior of B1-B13 Trailers

<u>Findings</u>	<u>Quantity and Locations</u>
Generators	Five (5) at the Main Hospital Building, 2nd Floor, Mechanical Room and Exterior of B-12 Trailer
Transformers/Capacitors	Fifteen (15) transformers/capacitors in Main Hospital Building, 1st Floor, Rooms 202, 404, 605, D-26 and Basement and 2nd Floor, Mechanical Rooms and Exterior of B-12 Trailer
Bird Feces	100 SF at the Exterior of Main Hospital Building, B1-B13 Trailers, Emergency Power Building, and Hazardous Waste Building

The light ballasts were inspected for PCB's. No PCB-containing light ballasts were observed in the inspected buildings. The light bulbs were inspected and approximately four-hundred fifty (450) mercury-containing light bulbs were present and were observed throughout the Main Hospital Building and B1-B13 trailers. In addition, six hundred (600) florescent light bulbs were observed throughout the Main Hospital Building and B1-B13 Trailers. These bulbs should be properly recycled prior to demolition. There were eight (8) mercury switches observed in the Emergency Power Building and B-7 Trailer. Mercury switches must be properly transported and recycled. At the time of the inspection, ten (10) HVAC Units were observed on the Main Hospital, Roof and fourteen (14) were observed at the exterior of B1-B13 trailers. This refrigerant gas is deemed to cause damage to the environment and more specifically, the ozone layer. The gases in the unit should be evacuated by a Certified Technician and/or Licensed Company, prior to demolition. Additionally, fifteen (15) transformers/capacitors were observed in the Main Hospital Building, Mechanical Rooms, and B-12 Trailer, Exterior. During the inspection, A-Tech also noted five (5) total generators located in the 2nd Floor, Mechanical Room of the Main Hospital Building and adjacent to the B12 Trailer, and approximately one-hundred (100) square feet of bird feces on the exterior of various buildings.

5.0 LABORATORY ACCREDITATION & ANALYTICAL PROCEDURES

The one thousand forty-six (1,046) samples obtained from the subject property were delivered to AIH Laboratory located at 2556 W. Woodland Drive, Anaheim, California 92801 (562) 860-2201 (under chain-of-custody procedures) for analysis. This laboratory is a fully accredited laboratory by the National Institute of Standards and Technology (NIST) through participation in the National Voluntary Laboratory Accreditation Program (NVLAP) lab code #500079-0.

The samples were analyzed for asbestos by PLM, using dispersion staining in accordance with U.S. EPA Procedures outlined in 40 CFR 763, Subpart F, Appendix A (ASHERA). Utilizing the PLM 600R/R-93/116 method, the result given is a semi-quantitative result (down to <1%) which reflects a calibrated visual estimate from an analyst using both Polarized Light Microscopy and Stereomicroscopy.

6.0 ASBESTOS IDENTIFICATION

Based upon the analytical results, asbestos is present in one-hundred forty-six (146) of the samples analyzed, of which one-hundred thirty-one (131) of the samples were considered to be non-friable materials and fifteen (15) were considered to be friable. These samples were obtained from the 12" x 12" pink streaked resilient flooring/resilient floor mastic, 12" x 12" dark brown streaked resilient flooring/resilient floor mastic, 12" x 12" light brown streaked resilient flooring/resilient floor mastic, 12" x 12" white with light brown streaked resilient flooring/resilient floor mastic, 12" x 12" light brown with red streaked resilient flooring/resilient floor mastic, 12" x 12" dark brown with tan streaked resilient flooring/resilient floor mastic, carpet glue with leveling compound, 12" x 12" light blue streaked resilient flooring/resilient floor mastic, 9" x 9" pink with black and red streaked resilient flooring/resilient floor mastic, 9" x 9" light brown with tan and dark brown streaked resilient flooring/resilient floor mastic, 9" x 9" pink with red and brown streaked resilient flooring/resilient floor mastic, 12" x 12" tan with brown and white streaked resilient flooring/resilient floor mastic, 9" x 9" green with white streaked resilient flooring/resilient floor mastic, 12" x 12" light tan with light brown streaked resilient flooring/resilient floor mastic, 12" x 12" white with blue and red streaked resilient flooring/resilient floor mastic, 12" x 12" brown and white streaked resilient flooring/resilient floor mastic, 12" x 12" orange with white streaked resilient flooring/resilient floor mastic, 12" x 12" off-white with light brown and gray streaked resilient flooring/resilient floor mastic, 24" x 24" gold resilient flooring/resilient floor mastic, 12" x 12" brown with gold flakes resilient flooring/resilient floor mastic, 12" x 12" granite pattern resilient flooring/resilient floor mastic, 9" x 9" brown with white streaked resilient flooring/resilient floor mastic, wheat tape with yellow insulation pipe wrap, concrete, fireproofing, light brown boiler TSI, 4" thermal system insulation pipe elbows/runs, 2" thermal system insulation pipe elbows/runs, 4" thermal system insulation pipe run wrapped in foil, red laced pipe insulation, 12" x 12" blue with gray stripes resilient flooring/resilient floor mastic, 12" x 12" brown with red stripes resilient floor tile/resilient floor mastic, 12" x 12" yellow with red stripes resilient floor tile/resilient floor mastic, 12" x 12" brown with brown streaked resilient floor tile/resilient floor mastic, black mounting mastic, silver mastic, brick and mortar, dark blue with white spots vinyl sheeting, carpet glue with vinyl flooring, penetration mastic, woven roof material with sealant, silver penetration mastic, brown penetration mastic, rolled roof, black penetration mastic, 12" x 12" tan with brown and white streaked resilient floor tile/resilient floor mastic, penetration mastic, and brown penetration mastic.

Based upon the analytical results, asbestos is present in the following material:

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-001A	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 806, Floor	Black Asphaltic Mastic Chrysotile - 2%	12,000 SF
211061-A-001C	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B21	Black Asphaltic Mastic Chrysotile - 2%	See 001A
211061-A-001E	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C5	Black Asphaltic Mastic Chrysotile - 2%	See 001A
211061-A-002D	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Black Asphaltic Mastic Chrysotile - 2%	1,500 SF
211061-A-003A	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, Corridor C	Trace of Black Asphaltic Mastic Chrysotile - 2%	1,500 SF
211061-A-003C	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Trace of Black Asphaltic Mastic Chrysotile - 2%	See 003A
211061-A-003E	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, Corridor 4	Trace of Black Asphaltic Mastic Chrysotile - 2%	See 003A
211061-A-004B	12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A34	Black Asphaltic Mastic Chrysotile - 2%	300 SF

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-004C	12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 5/6, 512	Black Asphaltic Mastic Chrysotile - 2%	See 004B
211061-A-005A	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, Corridor 7 Exit	Black Asphaltic Mastic with Debris Chrysotile - 2%	20,000 SF
211061-A-005B	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 5/6, 612	Black Asphaltic Mastic with Debris Chrysotile - 2%	See 005A
211061-A-005C	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, D/E Corridor	Black Asphaltic Mastic with Debris Chrysotile - 2%	See 005A
211061-A-005D	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B/C Corridor	Black Asphaltic Mastic with Debris Chrysotile - 2%	See 005A
211061-A-005E	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, Electrical Room	Black Asphaltic Mastic Chrysotile - 2%	See 005A
211061-A-005F	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 114	Black Asphaltic Mastic Chrysotile - 2%	See 005A
211061-A-005G	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 410	Black Asphaltic Mastic Chrysotile - 2%	See 005A
211061-A-006A	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, Exit Corridor 1	Black Asphaltic Mastic Chrysotile - 2%	2,000 SF
211061-A-006B	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 5/6, Corridor 5 Exit	Black Asphaltic Mastic Chrysotile - 2%	See 006A
211061-A-006C	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, Corridor 7 Exit	Black Asphaltic Mastic with Debris Chrysotile - 2%	See 006A
211061-A-006D	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, Corridor E	Black Asphaltic Mastic Chrysotile - 2%	See 006A
211061-A-006E	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B/C Corridor	Black Asphaltic Mastic Chrysotile - 2%	See 006A
211061-A-007A	Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area 7/8, 815	Black Asphaltic Mastic Chrysotile - 2%	5,500 SF
211061-A-007F	Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area A, A1	Black Asphaltic Mastic Chrysotile - 2%	See 007A
211061-A-007G	Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area B-E, B Corridor	Black Asphaltic Mastic Chrysotile - 2%	See 007A
211061-A-008B	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, D16	Black Asphaltic Mastic with Debris Chrysotile - 2%	1,200 SF
211061-A-008C	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 815	Black Asphaltic Mastic Chrysotile - 2%	See 008B
211061-A-008D	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E20	Black Asphaltic Mastic Chrysotile - 2%	See 008B

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-008E	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C16	Black Asphaltic Mastic with Debris Chrysotile - 2%	See 008B
211061-A-011A	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 800	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 3%	1,300 SF
211061-A-011B	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C26	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 3%	See 011A
211061-A-011C	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E4	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 3%	See 011A
211061-A-011D	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 103	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 3%	See 011A
211061-A-011E	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B28	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 3%	See 011A
211061-A-013A	9" x 9" Light Brown With Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C39	Black Asphaltic Mastic Chrysotile - 2% Beige Floor Tile Chrysotile - 3%	500 SF
211061-A-013B	9" x 9" Light Brown With Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C35	Black Asphaltic Mastic Chrysotile - 2% Beige Floor Tile Chrysotile - 3%	See 013A
211061-A-013C	9" x 9" Light Brown With Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 112	Black Asphaltic Mastic Chrysotile - 2% Beige Floor Tile Chrysotile - 3%	See 013A
211061-A-015A	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 403	Black Asphaltic Mastic Chrysotile - 2% Brown Floor Tile Chrysotile - 4%	1,500 SF
211061-A-015B	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 313	Black Asphaltic Mastic Chrysotile - 2% Brown Floor Tile Chrysotile - 4%	See 015A
211061-A-015C	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B31	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 4%	See 015A
211061-A-015D	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B39	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 4%	See 015A
211061-A-015E	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C32	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 4%	See 015A
211061-A-017A	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 304	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 4%	8,000 SF

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-017B	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B35	Black Asphaltic Mastic Chrysotile - 2%	See 017A
211061-A-017C	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, S40	Tan/Black Asphaltic Mastic Chrysotile - 2%	See 017A
211061-A-018A	9" x 9" Green With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C14	Green Floor Tile Chrysotile - 3%	100 SF
211061-A-018B	9" x 9" Green With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C14	Green Floor Tile Chrysotile - 3%	See 018A
211061-A-018C	9" x 9" Green With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C14	Green Floor Tile Chrysotile - 3%	See 018A
211061-A-020A	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E22	Black Asphaltic Mastic Chrysotile - 2%	1,700 SF
211061-A-020B	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, D4	Black Asphaltic Mastic Chrysotile - 2%	See 020A
211061-A-020C	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 102	Black Asphaltic Mastic Chrysotile - 2%	See 020A
211061-A-020D	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 108	Black Asphaltic Mastic Chrysotile - 2%	See 020A
211061-A-020E	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 110	Black Asphaltic Mastic Chrysotile - 2%	See 020A
211061-A-021A	12" x 12" White with Blue and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E20	Black Asphaltic Mastic with Grey Coating Chrysotile - 2%	900 SF
211061-A-021B	12" x 12" White with Blue and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B1	Black Asphaltic Mastic with Debris Chrysotile - 2%	See 021A
211061-A-021C	12" x 12" White with Blue and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B1	Black Asphaltic Mastic with Debris Chrysotile - 2%	See 021A
211061-A-022A	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 117	Black Asphaltic Mastic with Debris Chrysotile - 2%	8,000 SF
211061-A-022B	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B19	Black Asphaltic Mastic with Debris Chrysotile - 3%	See 022A
211061-A-022C	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, Corridor 3 Exit	Black Asphaltic Mastic with Debris Chrysotile - 3%	See 022A
211061-A-022D	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, Exit Corridor 2	Black Asphaltic Mastic with Debris Chrysotile - 3%	See 022A
211061-A-022E	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E10	Black Asphaltic Mastic with Debris Chrysotile - 3%	See 022A
211061-A-022F	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E18	Black Asphaltic Mastic with Debris Chrysotile - 3%	See 022A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-022G	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 417	Black Asphaltic Mastic with Debris Chrysotile - 3%	See 022A
211061-A-024A	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B3	Black Asphaltic Mastic Chrysotile - 2%	2,800 SF
211061-A-024B	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, S20	Black Asphaltic Mastic Chrysotile - 2%	See 024A
211061-A-025A	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, D4	Black Asphaltic Mastic Chrysotile - 2%	4,800 SF
211061-A-025B	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, S13	Black Asphaltic Mastic Chrysotile - 2%	See 025A
211061-A-025C	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B21	Black Asphaltic Mastic Chrysotile - 2%	See 025A
211061-A-025D	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, S17	Black Asphaltic Mastic Chrysotile - 2%	See 025A
211061-A-025E	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A27	Black Asphaltic Mastic Chrysotile - 2%	See 025A
211061-A-026A	24" x 24" Gold Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C10-A	Black Asphaltic Mastic Chrysotile - 2%	100 SF
211061-A-026B	24" x 24" Gold Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C10-A	Black Asphaltic Mastic Chrysotile - 2%	See 026A
211061-A-026C	24" x 24" Gold Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C10-A	Black Asphaltic Mastic Chrysotile - 2%	See 026A
211061-A-027A	12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Black Asphaltic Mastic Chrysotile - 2%	30 SF
211061-A-027B	12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Black Asphaltic Mastic Chrysotile - 2%	See 027A
211061-A-027C	12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Black Asphaltic Mastic Chrysotile - 2%	See 027A
211061-A-028A	12" x 12" Granite Pattern Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Black Asphaltic Mastic Chrysotile - 2%	70 SF
211061-A-028B	12" x 12" Granite Pattern Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Black Asphaltic Mastic with Debris Chrysotile - 3%	See 028A
211061-A-028C	12" x 12" Granite Pattern Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Black Asphaltic Mastic with Debris Chrysotile - 3%	See 028A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-029A	9" x 9" Brown With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A27 Bathroom	Black Asphaltic Mastic with debris Chrysotile - 2% Brown Floor Tile Chrysotile - 3%	50 SF
211061-A-029B	9" x 9" Brown With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A27 Bathroom	Black Asphaltic Mastic with debris Chrysotile - 2% Brown Floor Tile Chrysotile - 3%	See 029A
211061-A-029C	9" x 9" Brown With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A27 Bathroom	Black Asphaltic Mastic with debris Chrysotile - 2% Brown Floor Tile Chrysotile - 3%	See 029A
211061-A-060B	Wheat Tape with Yellow Insulation Pipe Wrap	Main Hospital, 1st Floor, Area B-E, B/C Corridor	Trace of grey loose fibrous material Chrysotile - 8%	4,500 SF
211061-A-060E	Wheat Tape with Yellow Insulation Pipe Wrap	Main Hospital, 1st Floor, Area A, Corridor A	Grey loose fibrous material Chrysotile - 12%	See 060B
211061-A-064D	Concrete	Main Hospital, 2nd Floor, Mechanical Room	Black asphaltic powdery material Chrysotile - 2%	3,700 SF
211061-A-066D	Fireproofing	Main Hospital, 2nd Floor, Mechanical Room	Grey chalky material with paint Chrysotile - 7%	4,500 SF
211061-A-066E	Fireproofing	Main Hospital, 2nd Floor, Mechanical Room	Grey chalky material with paint Chrysotile - 7%	See 066D
211061-A-068A	Light Brown Boiler TSI	Main Hospital, 2nd Floor, Mechanical Room	White fibrous powdery material Chrysotile - 5% Amosite - 5%	200 SF
211061-A-068B	Light Brown Boiler TSI	Main Hospital, 2nd Floor, Mechanical Room	White fibrous powdery material Chrysotile - 5% Amosite - 5%	See 068A
211061-A-068C	Light Brown Boiler TSI	Main Hospital, 2nd Floor, Mechanical Room	White fibrous powdery material Chrysotile - 5% Amosite - 5%	See 068A
211061-A-070A	4" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	White fibrous powdery material Chrysotile - 5% Amosite - 5%	500 SF
211061-A-070B	4" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	White fibrous powdery material Chrysotile - 5% Amosite - 5%	See 070A
211061-A-070C	4" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	White fibrous powdery material Chrysotile - 5% Amosite - 5%	See 070A
211061-A-071A	2" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	White fibrous powdery material Chrysotile - 5% Amosite - 5%	600 SF

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-071B	2" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	White fibrous powdery material Chrysotile - 5% Amosite - 5%	See 071A
211061-A-071C	2" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	White fibrous powdery material Chrysotile - 5% Amosite - 5%	See 071A
211061-A-090A	4" Thermal System Insulation Pipe Run Wrapped in Foil	Main Hospital, 1st Floor, Mechanical Room	Grey fibrous material Chrysotile - 10%	200 SF
211061-A-090C	4" Thermal System Insulation Pipe Run Wrapped in Foil	Main Hospital, 1st Floor, Mechanical Room	Grey fibrous material Chrysotile - 10%	See 090A
211061-A-092A	Red Laced Pipe Insulation	Main Hospital, Exterior, Exterior C	White woven fibrous material with coating Chrysotile - 5% Grey loose fibrous material Chrysotile - 10%	10 SF
211061-A-092B	Red Laced Pipe Insulation	Main Hospital, Exterior, Exterior C	White woven fibrous material with coating Chrysotile - 5% Grey loose fibrous material Chrysotile - 10%	See 092A
211061-A-092C	Red Laced Pipe Insulation	Main Hospital, Exterior, Exterior C	White woven fibrous material with coating Chrysotile - 5% Grey loose fibrous material Chrysotile - 10%	See 092A
211061-A-094A	12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic	B-13, 1st Floor, Open Area	Black Asphaltic Mastic Chrysotile - 2%	450 SF
211061-A-094B	12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic	B-13, 1st Floor, Open Area	Black Asphaltic Mastic Chrysotile - 2%	See 094A
211061-A-094C	12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic	B-13, 1st Floor, Open Area	Black Asphaltic Mastic Chrysotile - 2%	See 094A
211061-A-095A	12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Bank, Floor	Black Asphaltic Mastic Chrysotile - 2%	110 SF
211061-A-095B	12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Bank	Black Asphaltic Mastic Chrysotile - 2%	See 095A
211061-A-095C	12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Bank	Black Asphaltic Mastic Chrysotile - 2%	See 095A
211061-A-096A	12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Laundromat	Black Asphaltic Mastic Chrysotile - 2%	70 SF
211061-A-096B	12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Laundromat	Black Asphaltic Mastic Chrysotile - 2%	See 096A
211061-A-096C	12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Laundromat	Black Asphaltic Mastic Chrysotile - 2%	See 096A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-108A	12" x 12" Brown with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic	B-12, 1st Floor, Bathroom	Black Asphaltic Mastic Chrysotile - 2%	20 SF
211061-A-108B	12" x 12" Brown with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic	B-12, 1st Floor, Bathroom	Black Asphaltic Mastic Chrysotile - 2%	See 108A
211061-A-108C	12" x 12" Brown with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic	B-12, 1st Floor, Bathroom	Black Asphaltic Mastic Chrysotile - 2%	See 108A
211061-A-125A	Black Mounting Mastic	Emergency Power Building, Exterior, Roof	Black Asphaltic Mastic Chrysotile - 2%	10 SF
211061-A-125B	Black Mounting Mastic	Emergency Power Building, Exterior, Roof	Black Asphaltic Mastic Chrysotile - 2%	See 125A
211061-A-125C	Black Mounting Mastic	Emergency Power Building, Exterior, Roof	Black Asphaltic Mastic Chrysotile - 2%	See 125A
211061-A-133A	Silver Mastic	B-10, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 4%	1 SF
211061-A-133B	Silver Mastic	B-10, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 4%	See 133A
211061-A-133C	Silver Mastic	B-10, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 4%	See 133A
211061-A-135A	Brick and Mortar	Hazardous Waste, Exterior, Exterior A	White Sandy Material with coating Chrysotile - <1% Point Count - <0.1%	500 SF
211061-A-135B	Brick and Mortar	Hazardous Waste, Exterior, Exterior C	White Sandy Material with coating Chrysotile - <1% Point Count - <0.1%	See 135A
211061-A-135C	Brick and Mortar	Hazardous Waste, Exterior, Exterior D	White Sandy Material with coating Chrysotile - <1% Point Count - <0.1%	See 135A
211061-A-140A	Dark Blue with White Spots Vinyl Sheeting	B-02, 1st Floor, Janitor	Tan/Black Asphaltic Mastic Chrysotile - 2%	150 SF
211061-A-154A	Carpet Glue with Vinyl Flooring	B-03, 1st Floor, Registration	Cream Floor Tile Chrysotile - 3%	900 SF
211061-A-154B	Carpet Glue with Vinyl Flooring	B-03, 1st Floor, Registration	Cream Floor Tile Chrysotile - 3%	See 154A
211061-A-154C	Carpet Glue with Vinyl Flooring	B-03, 1st Floor, PFS Sup. Office	Cream Floor Tile Chrysotile - 3%	See 154A
211061-A-164A	Penetration Mastic	B-03, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 2%	10 SF
211061-A-164B	Penetration Mastic	B-03, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 2%	See 164A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-164C	Penetration Mastic	B-03, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 2%	See 164A
211061-A-185A	Woven Roof Material with Sealant	B-03, Exterior, Roof	Black Fibrous Woven Asphaltic Material with coating Chrysotile - 2%	1,400 SF
211061-A-185B	Woven Roof Material with Sealant	B-03, Exterior, Roof	Black Fibrous Woven Asphaltic Material with coating Chrysotile - 2%	See 185A
211061-A-185C	Woven Roof Material with Sealant	B-03, Exterior, Roof	Black Fibrous Woven Asphaltic Material with coating Chrysotile - 2%	See 185A
211061-A-185D	Woven Roof Material with Sealant	B-03, Exterior, Roof	Black Fibrous Woven Asphaltic Material with coating Chrysotile - 2%	See 185A
211061-A-185E	Woven Roof Material with Sealant	B-03, Exterior, Roof	Black Fibrous Woven Asphaltic Material with coating Chrysotile - 2%	See 185A
211061-A-221A	Silver Penetration Mastic	B-01, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 3%	10 SF
211061-A-221B	Silver Penetration Mastic	B-01, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 3%	See 221A
211061-A-221C	Silver Penetration Mastic	B-01, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 3%	See 221A
211061-A-224B	Brown Penetration Mastic	B-05, Exterior, Roof	Black Asphaltic Material Chrysotile - 2%	10 SF
211061-A-239E	Rolled Roof	B-04, Exterior, Roof	Multilayered black fibrous asphaltic material with granules Chrysotile - <1% Point Count - <0.1%	7,200 SF
211061-A-240A	Black Penetration Mastic	B-04, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 3%	10 SF
211061-A-241A	12" x 12" Tan with Brown and White Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Kitchen	Black Asphaltic Material Chrysotile - 2%	400 SF
211061-A-241B	12" x 12" Tan with Brown and White Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Kitchen	Black Asphaltic Material Chrysotile - 2%	See 241A
211061-A-241C	12" x 12" Tan with Brown and White Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Restroom	Black Asphaltic Material Chrysotile - 2%	See 241A
211061-A-257A	Penetration Mastic	B-11, Exterior, Roof	Black Asphaltic Mastic with coating and granules Chrysotile - 2%	20 SF

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-257C	Penetration Mastic	B-11, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 4%	See 257A
211061-A-273B	Brown Penetration Mastic	B-06, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 2%	10 SF
211061-A-273C	Brown Penetration Mastic	B-06, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 2%	See 273B
211061-A-185A	Woven Roof Material with Sealant	B-03, Exterior, Roof	Black Fibrous Woven Asphaltic Material with coating Chrysotile - 2%	1,400 SF
211061-A-185B	Woven Roof Material with Sealant	B-03, Exterior, Roof	Black Fibrous Woven Asphaltic Material with coating Chrysotile - 2%	See 185A
211061-A-185C	Woven Roof Material with Sealant	B-03, Exterior, Roof	Black Fibrous Woven Asphaltic Material with coating Chrysotile - 2%	See 185A
211061-A-185D	Woven Roof Material with Sealant	B-03, Exterior, Roof	Black Fibrous Woven Asphaltic Material with coating Chrysotile - 2%	See 185A
211061-A-185E	Woven Roof Material with Sealant	B-03, Exterior, Roof	Black Fibrous Woven Asphaltic Material with coating Chrysotile - 2%	See 185A
211061-A-221A	Silver Penetration Mastic	B-01, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 3%	10 SF
211061-A-221B	Silver Penetration Mastic	B-01, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 3%	See 221A
211061-A-221C	Silver Penetration Mastic	B-01, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 3%	See 221A
211061-A-224B	Brown Penetration Mastic	B-05, Exterior, Roof	Black Asphaltic Material Chrysotile - 2%	10 SF
211061-A-239E	Rolled Roof	B-04, Exterior, Roof	Multilayered black fibrous asphaltic material with granules Chrysotile - <1% Point Count - <0.1%	7,200 SF
211061-A-240A	Black Penetration Mastic	B-04, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 3%	10 SF
211061-A-241A	12" x 12" Tan with Brown and White Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Kitchen	Black Asphaltic Material Chrysotile - 2%	400 SF
211061-A-241B	12" x 12" Tan with Brown and White Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Kitchen	Black Asphaltic Material Chrysotile - 2%	See 241A
211061-A-241C	12" x 12" Tan with Brown and White Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Restroom	Black Asphaltic Material Chrysotile - 2%	See 241A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Asbestos Type - Percentage</u>	<u>Est. Qty.</u>
211061-A-257A	Penetration Mastic	B-11, Exterior, Roof	Black Asphaltic Mastic with coating and granules Chrysotile - 2%	20 SF
211061-A-257C	Penetration Mastic	B-11, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 4%	See 257A
211061-A-273B	Brown Penetration Mastic	B-06, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 2%	10 SF
211061-A-273C	Brown Penetration Mastic	B-06, Exterior, Roof	Black Asphaltic Mastic with coating Chrysotile - 2%	See 273B

The homogenous locations for the material containing asbestos are as follows:

<u>Material</u>	<u>Sample Locations</u>
12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C1 Main Hospital, 1st Floor, Area B-E, C3 Main Hospital, 1st Floor, Area B-E, C7 Main Hospital, 1st Floor, Area B-E, C19 Main Hospital, 1st Floor, Area B-E, D13 Main Hospital, 1st Floor, Area B-E, D21 Main Hospital, 1st Floor, Area B-E, C5 Main Hospital, 1st Floor, Area 3/4, Corridor 4 Main Hospital, 1st Floor, Area 3/4, 407 Main Hospital, 1st Floor, Area A, A34 Main Hospital, 1st Floor, Area A, A30 Main Hospital, 1st Floor, Area A, A23 Main Hospital, 1st Floor, Area 7/8, 806 Main Hospital, 1st Floor, Area 7/8, 807 Main Hospital, 1st Floor, Area 7/8, 804 Main Hospital, 1st Floor, Area B-E, B11 Main Hospital, 1st Floor, Area B-E, B21 Main Hospital, 1st Floor, Area B-E, B36 Main Hospital, 1st Floor, Area B-E, C28 Main Hospital, 1st Floor, Area 7/8, 816 Main Hospital, 1st Floor, Area 7/8, 810 Main Hospital, 1st Floor, Area 7/8, Corridor 8 Main Hospital, 1st Floor, Area 7/8, 811 Main Hospital, 1st Floor, Area 7/8, 809
12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23 Main Hospital, 1st Floor, Area 3/4, Corridor 4 Main Hospital, 1st Floor, Area B-E, Corridor C Main Hospital, 1st Floor, Area B-E, C1 Main Hospital, 1st Floor, Area B-E, C3 Main Hospital, 1st Floor, Area B-E, B36 Main Hospital, 1st Floor, Area A, A34 Main Hospital, 1st Floor, Area A, A30 Main Hospital, 1st Floor, Area 7/8, Corridor 8
12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B31 Main Hospital, 1st Floor, Area B-E, B36 Main Hospital, 1st Floor, Area A, A30 Main Hospital, 1st Floor, Area A, A34 Main Hospital, 1st Floor, Area A, A23 Main Hospital, 1st Floor, Area 3/4, Corridor 4 Main Hospital, 1st Floor, Area 7/8, Corridor 8 Main Hospital, 1st Floor, Area B-E, Corridor C Main Hospital, 1st Floor, Area B-E, C1 Main Hospital, 1st Floor, Area B-E, C3

<u>Material</u>	<u>Sample Locations</u>
12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A30 Main Hospital, 1st Floor, Area A, A23 Main Hospital, 1st Floor, Area 5/6, 512 Main Hospital, 1st Floor, Area 3/4, Corridor 4 Main Hospital, 1st Floor, Area B-E, Corridor C Main Hospital, 1st Floor, Area B-E, C1 Main Hospital, 1st Floor, Area B-E, B36 Main Hospital, 1st Floor, Area B-E, S1 Main Hospital, 1st Floor, Area A, A4 Main Hospital, 1st Floor, Area A, A34 Main Hospital, 1st Floor, Area 7/8, Corridor 8
12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A26 Main Hospital, 1st Floor, Area A, A28 Main Hospital, 1st Floor, Area A, Electrical Room Main Hospital, 1st Floor, Area 3/4, 410 Main Hospital, 1st Floor, Area 3/4, 416 Main Hospital, 1st Floor, Area 7/8, Corridor 7 Exit Main Hospital, 1st Floor, Area 7/8, Corridor 8 Exit Main Hospital, 1st Floor, Area 7/8, 805A Main Hospital, 1st Floor, Area A, A3 Main Hospital, 1st Floor, Area 1/2, 211 Main Hospital, 1st Floor, Area 1/2, 215 Main Hospital, 1st Floor, Area 3/4, 302 Main Hospital, 1st Floor, Area 3/4, 402 Main Hospital, 1st Floor, Area 3/4, 406 Main Hospital, 1st Floor, Area 3/4, 408 Main Hospital, 1st Floor, Area 1/2, 113 Main Hospital, 1st Floor, Area 1/2, 114 Main Hospital, 1st Floor, Area 1/2, 204 Main Hospital, 1st Floor, Area 1/2, 206 Main Hospital, 1st Floor, Area 1/2, 207 Main Hospital, 1st Floor, Area 1/2, 209 Main Hospital, 1st Floor, Area 1/2, 107 Main Hospital, 1st Floor, Area 1/2, 109 Main Hospital, 1st Floor, Area 5/6, 609 Main Hospital, 1st Floor, Area 5/6, 608 Main Hospital, 1st Floor, Area 5/6, 610 Main Hospital, 1st Floor, Area 5/6, 613 Main Hospital, 1st Floor, Area 5/6, 612 Main Hospital, 1st Floor, Area 5/6, 614 Main Hospital, 1st Floor, Area 5/6, 515 Main Hospital, 1st Floor, Area 5/6, 516 Main Hospital, 1st Floor, Area 5/6, 517 Main Hospital, 1st Floor, Area 5/6, Corridor 6 Main Hospital, 1st Floor, Area 5/6, 607 Main Hospital, 1st Floor, Area 5/6, 606 Main Hospital, 1st Floor, Area 5/6, 506 Main Hospital, 1st Floor, Area 5/6, 508 Main Hospital, 1st Floor, Area 5/6, 509 Main Hospital, 1st Floor, Area 5/6, 511 Main Hospital, 1st Floor, Area 5/6, 512 Main Hospital, 1st Floor, Area 5/6, 513 Main Hospital, 1st Floor, Area 5/6, 617 Main Hospital, 1st Floor, Area 5/6, 618 Main Hospital, 1st Floor, Area 5/6, 619 Main Hospital, 1st Floor, Area 5/6, Corridor 5 Main Hospital, 1st Floor, Area 5/6, 502 Main Hospital, 1st Floor, Area 5/6, 500 Main Hospital, 1st Floor, Area B-E, B19 Main Hospital, 1st Floor, Area B-E, B38 Main Hospital, 1st Floor, Area B-E, B32 Main Hospital, 1st Floor, Area B-E, B34 Main Hospital, 1st Floor, Area 5/6, Corridor 5 Exit Main Hospital, 1st Floor, Area 5/6, Corridor 6 Exit Main Hospital, 1st Floor, Area B-E, D36 Main Hospital, 1st Floor, Area B-E, Corridor E Main Hospital, 1st Floor, Area B-E, B/C Corridor Main Hospital, 1st Floor, Area B-E, B16 Main Hospital, 1st Floor, Area B-E, File Room

<u>Material</u>	<u>Sample Locations</u>
	Main Hospital, 1st Floor, Area B-E, D31 Main Hospital, 1st Floor, Area B-E, C17A Main Hospital, 1st Floor, Area B-E, Corridor D Main Hospital, 1st Floor, Area B-E, D13 Main Hospital, 1st Floor, Area B-E, D17 Main Hospital, 1st Floor, Area B-E, D/E Corridor Main Hospital, 1st Floor, Area B-E, D38 Main Hospital, 1st Floor, Area B-E, D23 Main Hospital, 1st Floor, Area B-E, D25 Main Hospital, 1st Floor, Area B-E, D30 Main Hospital, 1st Floor, Area B-E, C20 Main Hospital, 1st Floor, Area B-E, C22 Main Hospital, 1st Floor, Area B-E, C17 Main Hospital, 1st Floor, Area B-E, C31 Main Hospital, 1st Floor, Area B-E, C37 Main Hospital, 1st Floor, Area B-E, C33 Main Hospital, 1st Floor, Area B-E, D19
12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23
12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, Corridor 4
12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A34

<u>Material</u>	<u>Sample Locations</u>
12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C1 Main Hospital, 1st Floor, Area B-E, C3 Main Hospital, 1st Floor, Area B-E, C7 Main Hospital, 1st Floor, Area B-E, C19 Main Hospital, 1st Floor, Area B-E, D13 Main Hospital, 1st Floor, Area B-E, D21 Main Hospital, 1st Floor, Area B-E, C5 Main Hospital, 1st Floor, Area 3/4, Corridor 4 Main Hospital, 1st Floor, Area 3/4, 407 Main Hospital, 1st Floor, Area A, A34 Main Hospital, 1st Floor, Area A, A30 Main Hospital, 1st Floor, Area A, A23 Main Hospital, 1st Floor, Area 7/8, 806 Main Hospital, 1st Floor, Area 7/8, 807 Main Hospital, 1st Floor, Area 7/8, 804 Main Hospital, 1st Floor, Area B-E, B11 Main Hospital, 1st Floor, Area B-E, B21 Main Hospital, 1st Floor, Area B-E, B36 Main Hospital, 1st Floor, Area B-E, C28 Main Hospital, 1st Floor, Area 7/8, 816 Main Hospital, 1st Floor, Area 7/8, 810 Main Hospital, 1st Floor, Area 7/8, Corridor 8 Main Hospital, 1st Floor, Area 7/8, 811 Main Hospital, 1st Floor, Area 7/8, 809
12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23 Main Hospital, 1st Floor, Area 3/4, Corridor 4 Main Hospital, 1st Floor, Area B-E, Corridor C Main Hospital, 1st Floor, Area B-E, C1 Main Hospital, 1st Floor, Area B-E, C3 Main Hospital, 1st Floor, Area B-E, B36 Main Hospital, 1st Floor, Area A, A34 Main Hospital, 1st Floor, Area A, A30 Main Hospital, 1st Floor, Area 7/8, Corridor 8

<u>Material</u>	<u>Sample Locations</u>
12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B31 Main Hospital, 1st Floor, Area B-E, B36 Main Hospital, 1st Floor, Area A, A30 Main Hospital, 1st Floor, Area A, A34 Main Hospital, 1st Floor, Area A, A23 Main Hospital, 1st Floor, Area 3/4, Corridor 4 Main Hospital, 1st Floor, Area 7/8, Corridor 8 Main Hospital, 1st Floor, Area B-E, Corridor C Main Hospital, 1st Floor, Area B-E, C1 Main Hospital, 1st Floor, Area B-E, C3
12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A30 Main Hospital, 1st Floor, Area A, A23 Main Hospital, 1st Floor, Area 5/6, 512 Main Hospital, 1st Floor, Area 3/4, Corridor 4 Main Hospital, 1st Floor, Area B-E, Corridor C Main Hospital, 1st Floor, Area B-E, C1 Main Hospital, 1st Floor, Area B-E, B36 Main Hospital, 1st Floor, Area B-E, S1 Main Hospital, 1st Floor, Area A, A4 Main Hospital, 1st Floor, Area A, A34 Main Hospital, 1st Floor, Area 7/8, Corridor 8
12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A26 Main Hospital, 1st Floor, Area A, A28 Main Hospital, 1st Floor, Area A, Electrical Room Main Hospital, 1st Floor, Area 3/4, 410 Main Hospital, 1st Floor, Area 3/4, 416 Main Hospital, 1st Floor, Area 7/8, Corridor 7 Exit Main Hospital, 1st Floor, Area 7/8, Corridor 8 Exit Main Hospital, 1st Floor, Area 7/8, 805A Main Hospital, 1st Floor, Area A, A3 Main Hospital, 1st Floor, Area 1/2, 211 Main Hospital, 1st Floor, Area 1/2, 215 Main Hospital, 1st Floor, Area 3/4, 302 Main Hospital, 1st Floor, Area 3/4, 402 Main Hospital, 1st Floor, Area 3/4, 406 Main Hospital, 1st Floor, Area 3/4, 408 Main Hospital, 1st Floor, Area 1/2, 113 Main Hospital, 1st Floor, Area 1/2, 114 Main Hospital, 1st Floor, Area 1/2, 204 Main Hospital, 1st Floor, Area 1/2, 206 Main Hospital, 1st Floor, Area 1/2, 207 Main Hospital, 1st Floor, Area 1/2, 209 Main Hospital, 1st Floor, Area 1/2, 107 Main Hospital, 1st Floor, Area 1/2, 109 Main Hospital, 1st Floor, Area 5/6, 609 Main Hospital, 1st Floor, Area 5/6, 608 Main Hospital, 1st Floor, Area 5/6, 610 Main Hospital, 1st Floor, Area 5/6, 613 Main Hospital, 1st Floor, Area 5/6, 612 Main Hospital, 1st Floor, Area 5/6, 614 Main Hospital, 1st Floor, Area 5/6, 515 Main Hospital, 1st Floor, Area 5/6, 516 Main Hospital, 1st Floor, Area 5/6, 517 Main Hospital, 1st Floor, Area 5/6, Corridor 6 Main Hospital, 1st Floor, Area 5/6, 607 Main Hospital, 1st Floor, Area 5/6, 606 Main Hospital, 1st Floor, Area 5/6, 506 Main Hospital, 1st Floor, Area 5/6, 508 Main Hospital, 1st Floor, Area 5/6, 509 Main Hospital, 1st Floor, Area 5/6, 511 Main Hospital, 1st Floor, Area 5/6, 512 Main Hospital, 1st Floor, Area 5/6, 513

Material	Sample Locations
	Main Hospital, 1st Floor, Area 5/6, 617 Main Hospital, 1st Floor, Area 5/6, 618 Main Hospital, 1st Floor, Area 5/6, 619 Main Hospital, 1st Floor, Area 5/6, Corridor 5 Main Hospital, 1st Floor, Area 5/6, 502 Main Hospital, 1st Floor, Area 5/6, 500 Main Hospital, 1st Floor, Area B-E, B19 Main Hospital, 1st Floor, Area B-E, B38 Main Hospital, 1st Floor, Area B-E, B32 Main Hospital, 1st Floor, Area B-E, B34 Main Hospital, 1st Floor, Area 5/6, Corridor 5 Exit Main Hospital, 1st Floor, Area 5/6, Corridor 6 Exit Main Hospital, 1st Floor, Area B-E, D36 Main Hospital, 1st Floor, Area B-E, Corridor E Main Hospital, 1st Floor, Area B-E, B/C Corridor Main Hospital, 1st Floor, Area B-E, B16 Main Hospital, 1st Floor, Area B-E, File Room Main Hospital, 1st Floor, Area B-E, D31 Main Hospital, 1st Floor, Area B-E, C17A Main Hospital, 1st Floor, Area B-E, Corridor D Main Hospital, 1st Floor, Area B-E, D13 Main Hospital, 1st Floor, Area B-E, D17 Main Hospital, 1st Floor, Area B-E, D/E Corridor Main Hospital, 1st Floor, Area B-E, D38 Main Hospital, 1st Floor, Area B-E, D23 Main Hospital, 1st Floor, Area B-E, D25 Main Hospital, 1st Floor, Area B-E, D30 Main Hospital, 1st Floor, Area B-E, C20 Main Hospital, 1st Floor, Area B-E, C22 Main Hospital, 1st Floor, Area B-E, C17 Main Hospital, 1st Floor, Area B-E, C31 Main Hospital, 1st Floor, Area B-E, C37 Main Hospital, 1st Floor, Area B-E, C33 Main Hospital, 1st Floor, Area B-E, D19
12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, Corridor 7 Exit Main Hospital, 1st Floor, Area 7/8, Corridor 8 Exit Main Hospital, 1st Floor, Area B-E, Corridor D Main Hospital, 1st Floor, Area B-E, D/E Corridor Main Hospital, 1st Floor, Area B-E, Corridor E Main Hospital, 1st Floor, Area B-E, B/C Corridor Main Hospital, 1st Floor, Area 5/6, Corridor 5 Main Hospital, 1st Floor, Area 5/6, Corridor 6 Main Hospital, 1st Floor, Area 1/2, Exit Corridor 1 Main Hospital, 1st Floor, Area 1/2, Exit Corridor 2 Main Hospital, 1st Floor, Area 3/4, Corridor 3 Exit Main Hospital, 1st Floor, Area 3/4, Corridor 4 Exit Main Hospital, 1st Floor, Area 5/6, Corridor 5 Exit Main Hospital, 1st Floor, Area 5/6, Corridor 6 Exit
Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area 3/4, 303 Main Hospital, 1st Floor, Area A, A1 Main Hospital, 1st Floor, Area B-E, E11 Main Hospital, 1st Floor, Area B-E, B Corridor Main Hospital, 1st Floor, Area B-E, C36 Main Hospital, 1st Floor, Area 7/8, 708 Main Hospital, 1st Floor, Area 7/8, 710 Main Hospital, 1st Floor, Area 7/8, 713 Main Hospital, 1st Floor, Area 7/8, 712 Main Hospital, 1st Floor, Area 7/8, 714 Main Hospital, 1st Floor, Area 5/6, 607 Main Hospital, 1st Floor, Area 7/8, 815 Main Hospital, 1st Floor, Area 7/8, Corridor 7 Main Hospital, 1st Floor, Area 7/8, 702

<u>Material</u>	<u>Sample Locations</u>
	Main Hospital, 1st Floor, Area 7/8, 704 Main Hospital, 1st Floor, Area 7/8, 706 Main Hospital, 1st Floor, Area 7/8, 709
12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, HQ, Room Main Hospital, 1st Floor, Area 7/8, 815 Main Hospital, 1st Floor, Area B-E, C16 Main Hospital, 1st Floor, Area B-E, E20 Main Hospital, 1st Floor, Area B-E, D16 Main Hospital, 1st Floor, Area B-E, D29
9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B28 Main Hospital, 1st Floor, Area A, A5 Main Hospital, 1st Floor, Area A, A3A Main Hospital, 1st Floor, Area A, A11 Main Hospital, 1st Floor, Area 1/2, 101 Main Hospital, 1st Floor, Area 1/2, 103 Main Hospital, 1st Floor, Area 7/8, 800 Main Hospital, 1st Floor, Area B-E, C38 Main Hospital, 1st Floor, Area B-E, C39 Main Hospital, 1st Floor, Area B-E, C26 Main Hospital, 1st Floor, Area B-E, E4
9" x 9" Light Brown With Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 112 Main Hospital, 1st Floor, Area B-E, C39 Main Hospital, 1st Floor, Area B-E, C35
9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B23 Main Hospital, 1st Floor, Area B-E, B31 Main Hospital, 1st Floor, Area B-E, B35 Main Hospital, 1st Floor, Area B-E, B37 Main Hospital, 1st Floor, Area B-E, B39 Main Hospital, 1st Floor, Area 3/4, 313 Main Hospital, 1st Floor, Area 3/4, 403 Main Hospital, 1st Floor, Area B-E, C32 Main Hospital, 1st Floor, Area B-E, C30 Main Hospital, 1st Floor, Area B-E, C24
12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 316 Main Hospital, 1st Floor, Area 3/4, 317 Main Hospital, 1st Floor, Area 3/4, 311 Main Hospital, 1st Floor, Area 3/4, 307 Main Hospital, 1st Floor, Area 3/4, 304 Main Hospital, 1st Floor, Area 3/4, 309 Main Hospital, 1st Floor, Area A, A12 Main Hospital, 1st Floor, Area 1/2, 210 Main Hospital, 1st Floor, Area 1/2, Exit Corridor 2 Main Hospital, 1st Floor, Area 3/4, 305 Main Hospital, 1st Floor, Area 3/4, 310 Main Hospital, 1st Floor, Area 3/4, 315 Main Hospital, 1st Floor, Area B-E, E18 Main Hospital, 1st Floor, Area B-E, B9 Main Hospital, 1st Floor, Area B-E, S40 Main Hospital, 1st Floor, Area B-E, B19 Main Hospital, 1st Floor, Area B-E, B22 Main Hospital, 1st Floor, Area B-E, B35 Main Hospital, 1st Floor, Area B-E, C17A Main Hospital, 1st Floor, Area B-E, D30
9" x 9" Green With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C14

<u>Material</u>	<u>Sample Locations</u>
12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 110 Main Hospital, 1st Floor, Area B-E, E22 Main Hospital, 1st Floor, Area B-E, D4 Main Hospital, 1st Floor, Area 1/2, 102 Main Hospital, 1st Floor, Area 1/2, 108
12" x 12" White with Blue and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E20 Main Hospital, 1st Floor, Area B-E, B1
12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, Exit Corridor 2 Main Hospital, 1st Floor, Area 3/4, Corridor 4 Main Hospital, 1st Floor, Area 3/4, Corridor 4 Exit Main Hospital, 1st Floor, Area 3/4, 409 Main Hospital, 1st Floor, Area 3/4, 413 Main Hospital, 1st Floor, Area 3/4, 414 Main Hospital, 1st Floor, Area 3/4, 417 Main Hospital, 1st Floor, Area 1/2, 117 Main Hospital, 1st Floor, Area 1/2, Corridor 2 Main Hospital, 1st Floor, Area 1/2, 213 Main Hospital, 1st Floor, Area 1/2, 216 Main Hospital, 1st Floor, Area 3/4, Corridor 3 Main Hospital, 1st Floor, Area 3/4, Corridor 3 Exit Main Hospital, 1st Floor, Area B-E, E6 Main Hospital, 1st Floor, Area B-E, E4 Main Hospital, 1st Floor, Area B-E, B19 Main Hospital, 1st Floor, Area B-E, B21 Main Hospital, 1st Floor, Area B-E, B26 Main Hospital, 1st Floor, Area 1/2, Corridor 1 Main Hospital, 1st Floor, Area B-E, E10 Main Hospital, 1st Floor, Area B-E, E18 Main Hospital, 1st Floor, Area B-E, Corridor E
12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B3 Main Hospital, 1st Floor, Area B-E, E9 Main Hospital, 1st Floor, Area B-E, S20 Main Hospital, 1st Floor, Area B-E, S21 Main Hospital, 1st Floor, Area B-E, C2
12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A27 Main Hospital, 1st Floor, Area A, A11 Main Hospital, 1st Floor, Area B-E, B19 Main Hospital, 1st Floor, Area B-E, B21 Main Hospital, 1st Floor, Area B-E, D4 Main Hospital, 1st Floor, Area B-E, D2 Corridor Main Hospital, 1st Floor, Area B-E, S13 Main Hospital, 1st Floor, Area B-E, E13 Main Hospital, 1st Floor, Area B-E, S16 Main Hospital, 1st Floor, Area B-E, S17
24" x 24" Gold Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C10-A
12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23
12" x 12" Granite Pattern Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23
9" x 9" Brown With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A27 Bathroom
Wheat Tape with Yellow Insulation Pipe Wrap	Main Hospital, 1st Floor, Throughout

<u>Material</u>	<u>Sample Locations</u>
Concrete	Main Hospital, 2nd Floor, Stair Main Hospital, 2nd Floor, Mechanical Room Main Hospital, 2nd Floor, HVAC Intake 1 Main Hospital, 2nd Floor, HVAC Intake 2 Main Hospital, 2nd Floor, HVAC Intake 3
Fireproofing	Main Hospital, 2nd Floor, Stair Main Hospital, 2nd Floor, Mechanical Room
Light Brown Boiler TSI	Main Hospital, 2nd Floor, Mechanical Room
4" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room
2" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room
4" Thermal System Insulation Pipe Run Wrapped in Foil	Main Hospital, 1st Floor, Mechanical Room
Red Laced Pipe Insulation	Main Hospital, Exterior, Exterior C
12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic	B-13, 1st Floor, Open Area
12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Bank
12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Laundromat
12" x 12" Brown with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic	B-12, 1st Floor, Bathroom
Black Mounting Mastic	Emergency Power Building, Exterior, Roof
Silver Mastic	B-10, Exterior, Roof
Brick and Mortar	Hazardous Waste, Exterior, Exterior A Hazardous Waste, Exterior, Exterior B Hazardous Waste, Exterior, Exterior C Hazardous Waste, Exterior, Exterior D
Dark Blue with White Spots Vinyl Sheeting	B-02, 1st Floor, Janitor B-02, 1st Floor, Lounge
Carpet Glue with Vinyl Flooring	B-03, 1st Floor, Registration B-03, 1st Floor, PFS Sup. Office
Penetration Mastic	B-03, Exterior, Roof
Woven Roof Material with Sealant	B-03, Exterior, Roof
Silver Penetration Mastic	B-01, Exterior, Roof
Brown Penetration Mastic	B-05, Exterior, Roof
Rolled Roof	B-04, Exterior, Roof
Black Penetration Mastic	B-04, Exterior, Roof
12" x 12" Tan with Brown and White Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Kitchen B-11, 1st Floor, Restroom
Penetration Mastic	B-11, Exterior, Roof

<u>Material</u>	<u>Sample Locations</u>
Brown Penetration Mastic	B-06, Exterior, Roof

7.0 BUILDING & MATERIAL CONDITION

The facility structure is in good condition with no structural damage.

The building materials identified as ACM's are in good and fair condition and are considered to be friable and non-friable (See Appendix A. Asbestos Bulk Analysis for detailed information).

Materials in good condition have a low exposure potential in their current state. Monitor conditions regularly and maintain all asbestos-containing materials in good (intact) condition.

Materials in fair condition have a moderate exposure potential in their current state and are more likely to deteriorate than materials in good condition. Stabilization of material by properly certified personnel should be conducted to restore material into a good (intact) state.

8.0 RECOMMENDATIONS

Due to the potential hazards of exposure, an Asbestos Management Program (AMP) should be prepared, and implemented, to avoid incidental, and/or accidental disturbance of ACM. The AMP should set forth operational and maintenance guidelines to minimize fiber release, which may be caused by, age, normal wear and tear, delamination, building maintenance, repairs, renovation and other activities which may disturb ACM.

Prior to renovation, specifications should be properly modified to incorporate the removal of ACM. If removal of ACM is required in connection with demolition, renovation, or building repair, such work should only be performed by personnel who are appropriately trained, experienced, and registered. Intentional disturbance of ACM should be performed in a manner such that emissions are controlled. Control measures should include, but not be limited to, wet methods; encapsulation, removal with HEPA-filter equipped vacuums, and appropriately labeled polyethylene bags. HVAC systems in work areas where asbestos is to be abated should be deactivated and the register closed and temporarily sealed. Air monitoring relating to such work should be performed by or under the direct supervision of a California State Certified Asbestos Consultant before, during, and after the abatement work, as required by EPA and other regulations.

California law requires a building owner to provide tenant, employee and vendor notifications within fifteen (15) days of receipt of information identifying the presence of ACM in their building(s) and annually thereafter. Specific notification requirements are outlined in Assembly Bill 3713.

There are potential liabilities associated with the presence, and removal of ACM. Precautionary measures, as outlined herein, should be taken in accordance with the guidelines set forth by the EPA, the Occupational Safety and Health Administration (OSHA) and other regulatory agencies. The Division of Occupational Safety and Health (DOSH or CAL/OSHA) must be notified a minimum of 24 hours prior to the start of any asbestos-abatement project.

The local National Emission Standards for Hazardous Air Pollutants (NESHAP) regulatory agency as listed below must be notified ten (10) working days prior to the start of any demolition or asbestos – abatement projects which exceed 100 square feet or 120 linear feet of asbestos-containing material. This project is within the jurisdiction of South Coast Air Quality Management District (SCAQMD), Rule 1403.

If additional suspect materials are observed by the contractor, abatement contractor, building owner and/or its representatives, A-Tech should be notified to conduct additional testing. Certain materials may not have been visible/accessible during the initial assessment such as subsurface materials, live electrical equipment, materials in pipe chases, barrier paper under wood, sub-slab membranes, materials under the building structure, in wall and ceiling cavities, etc.

9.0 LIMITATIONS

The conclusions presented in this report are professional opinions based solely upon visual observations at the site and laboratory analysis of the tested samples. They are intended exclusively for the purpose outlined herein, and for the site location and project indicated.

This assessment report is not specifications for asbestos abatement and it should not be used as a stand-alone asbestos abatement bid document. Recognizing that even the most comprehensive assessment may fail to detect ACMF at a particular site, this study was not intended to identify all potential ACMF present in the building or at the site for such reasons as the possible existence of buried, covered and inaccessible areas and features. A-Tech does not warrant that all sub-surface, wall cavity or other inaccessible materials were tested. A-Tech did not test any live electrical components or disassemble operational building equipment such as fans or HVAC components. These components may contain untested suspect ACMF's. If any suspect ACMFs not tested herein are discovered, they must be tested prior to impact.

Samples were collected from materials of similar appearance, age, use, type, color and/or texture. However, this does not guarantee that they are of the same composition. No guarantee is expressed or implied that all ACMF has been identified. **Asbestos quantities are estimates only (see Asbestos Tables-Est. Qty.) Exact quantities should be verified by the abatement contractor prior to removal.**

A-Tech assumes no responsibility for the identification of suspect asbestos containing materials, which are not included in this assessment, concealed and/or inaccessible (i.e. locked rooms, under carpet, etc.) However, A-Tech makes every attempt possible to inspect all designated areas for asbestos containing materials (i.e. check under carpeting, inspect attic, crawl space, etc.).

Services performed by A-Tech were conducted in a manner above the care and skill ordinarily and currently exercised by members of the same profession that even the most comprehensive scope of services might fail to detect environmental liabilities on a particular site. Therefore, A-Tech cannot act as insurers and cannot "certify" that a site is free of environmental contamination.

No expressed or implied representation or warranty is included or intended in our reports, except that our services were performed, within the limits prescribed by the Scope of Services, with the customary thoroughness and competence of our profession.

This report is intended for the sole use of the contracted Client and its authorized representatives. The exchange of information was unique between A-Tech and the client regarding the mutually agreed upon scope of service. Unless explicitly authorized in this report, no third party is beneficiary to the contract or findings of this report. The unauthorized use or reliance of this document or the findings, conclusion or recommendations presented herein, by any other party or parties is at the sole risk of any such third party. For the same reasons, no warranties or representations, expressed or implied in this report, are provided to any such third party.

Information and opinions presented herein apply to the existing and reasonable foreseeable site conditions at the time of our investigation. They cannot necessarily apply to site changes of which this office is unaware and have not had the opportunity to review. Changes in the conditions of this property may occur with time due to natural processes or works of man on the subject property or on adjacent properties. Changes in applicable standards may also occur as a result of legislation or the broadening of knowledge. Accordingly, the findings of this report may be invalidated, wholly or in part by changes beyond our control.

A-Tech trusts that the information presented herein provides the data you require. Should you have any questions or comments please contact A-Tech Consulting, Inc. at (800) 434-1025.

Respectfully submitted,
A-Tech Consulting, Inc.



Robert L. Williams, DPH, CAC, CIEC
Certified Asbestos Consultant #96-1980

Asbestos Bulk Analysis

Client Name: High Desert Hospital, 44900 60th Street West

A-Tech Project Number: 211061

Location: Various Buildings, Interior and Exterior

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-001A	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 806, Floor	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	12,000 SF
211061-A-001B	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 816	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-001C	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B21	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 001A
211061-A-001D	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, D13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-001E	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C5	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 001A
211061-A-001F	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A30	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-001G	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 407	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-002A	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B36	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-002B	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, Corridor 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-002C	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A34	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-002D	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	1,500 SF
211061-A-002E	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, Corridor 8	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-003A	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, Corridor C	Positive	Trace of Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	1,500 SF
211061-A-003B	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-003C	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Positive	Trace of Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 003A
211061-A-003D	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B31	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-003E	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, Corridor 4	Positive	Trace of Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 003A
211061-A-004A	12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B36	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-004B	12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A34	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	300 SF
211061-A-004C	12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 5/6, 512	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 004B

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-005A	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, Corridor 7 Exit	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2%	Misc.	Non-Friable	Good	High	20,000 SF
211061-A-005B	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 5/6, 612	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 005A
211061-A-005C	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, D/E Corridor	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 005A
211061-A-005D	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B/C Corridor	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 005A
211061-A-005E	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, Electrical Room	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 005A
211061-A-005F	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 114	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 005A
211061-A-005G	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 410	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 005A
211061-A-006A	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, Exit Corridor 1	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	2,000 SF
211061-A-006B	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 5/6, Corridor 5 Exit	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 006A
211061-A-006C	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, Corridor 7 Exit	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 006A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-006D	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, Corridor E	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 006A
211061-A-006E	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B/C Corridor	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 006A
211061-A-007A	Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area 7/8, 815	Positive	Black Asphaltic Mastic Chrysotile - 2%	Surfacing	Non-Friable	Good	Moderate	5,500 SF
211061-A-007B	Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area 7/8, Corridor 7	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-007C	Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area 7/8, 702	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-007D	Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area 3/4, 303	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-007E	Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area B-E, E11	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-007F	Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area A, A1	Positive	Black Asphaltic Mastic Chrysotile - 2%	Surfacing	Non-Friable	Good	Moderate	See 007A
211061-A-007G	Carpet Glue With Leveling Compound	Main Hospital, 1st Floor, Area B-E, B Corridor	Positive	Black Asphaltic Mastic Chrysotile - 2%	Surfacing	Non-Friable	Good	Moderate	See 007A
211061-A-008A	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, HQ, Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-008B	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, D16	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2%	Misc.	Non-Friable	Good	High	1,200 SF

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-008C	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 815	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 008B
211061-A-008D	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E20	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 008B
211061-A-008E	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C16	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 008B
211061-A-009A	12" x 12" Blue With Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 813	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-009B	12" x 12" Blue With Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 813	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-009C	12" x 12" Blue With Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 813	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-010A	12" x 12" Dark Gray With Black Streaked Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 813	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-010B	12" x 12" Dark Gray With Black Streaked Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 813	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-010C	12" x 12" Dark Gray With Black Streaked Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 813	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-011A	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 7/8, 800	Positive	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Fair	High	1,300 SF

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-011B	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C26	Positive	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Fair	High	See 011A
211061-A-011C	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E4	Positive	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Fair	High	See 011A
211061-A-011D	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 103	Positive	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Fair	High	See 011A
211061-A-011E	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B28	Positive	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Fair	High	See 011A
211061-A-013A	9" x 9" Light Brown With Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C39	Positive	Black Asphaltic Mastic Chrysotile - 2% Beige Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Fair	High	500 SF
211061-A-013B	9" x 9" Light Brown With Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C35	Positive	Black Asphaltic Mastic Chrysotile - 2% Beige Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Fair	High	See 013A
211061-A-013C	9" x 9" Light Brown With Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 112	Positive	Black Asphaltic Mastic Chrysotile - 2% Beige Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Fair	High	See 013A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-014A	Green Carpet Glue	Main Hospital, 1st Floor, Area B-E, C34	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-014B	Green Carpet Glue	Main Hospital, 1st Floor, Area B-E, C34	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-014C	Green Carpet Glue	Main Hospital, 1st Floor, Area 5/6, 507	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-015A	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 403	Positive	Black Asphaltic Mastic Chrysotile - 2% Brown Floor Tile Chrysotile - 4%	Misc.	Non-Friable	Fair	High	1,500 SF
211061-A-015B	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 313	Positive	Black Asphaltic Mastic Chrysotile - 2% Brown Floor Tile Chrysotile - 4%	Misc.	Non-Friable	Fair	High	See 015A
211061-A-015C	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B31	Positive	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 4%	Misc.	Non-Friable	Fair	High	See 015A
211061-A-015D	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B39	Positive	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 4%	Misc.	Non-Friable	Fair	High	See 015A
211061-A-015E	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C32	Positive	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 4%	Misc.	Non-Friable	Fair	High	See 015A
211061-A-016A	Concrete	Main Hospital, 1st Floor, Area B-E, Kitchen	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-016B	Concrete	Main Hospital, 1st Floor, Area B-E, Kitchen	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-016C	Concrete	Main Hospital, 1st Floor, Area B-E, Kitchen	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-016D	Concrete	Main Hospital, 1st Floor, Area 5/6, 605	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-016E	Concrete	Main Hospital, 1st Floor, Area B-E, D26	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-016F	Concrete	Main Hospital, 1st Floor, Area 1/2, 202	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-016G	Concrete	Main Hospital, 1st Floor, Area B-E, D26	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-017A	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 304	Positive	Black Asphaltic Mastic Chrysotile - 2% Cream Floor Tile Chrysotile - 4%	Misc.	Non-Friable	Good	High	8,000 SF
211061-A-017B	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B35	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 017A
211061-A-017C	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, S40	Positive	Tan/Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 017A
211061-A-017D	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, D30	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-017E	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E18	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-017F	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C17A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-017G	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B22	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-018A	9" x 9" Green With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C14	Positive	Green Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Good	High	100 SF
211061-A-018B	9" x 9" Green With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C14	Positive	Green Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 018A
211061-A-018C	9" x 9" Green With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C14	Positive	Green Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 018A
211061-A-019A	Tan Speckled Vinyl Sheeting	Main Hospital, 1st Floor, Area B-E, B2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-019B	Tan Speckled Vinyl Sheeting	Main Hospital, 1st Floor, Area B-E, OR1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-019C	Tan Speckled Vinyl Sheeting	Main Hospital, 1st Floor, Area B-E, OR2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-019D	Tan Speckled Vinyl Sheeting	Main Hospital, 1st Floor, Area B-E, OR3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-019E	Tan Speckled Vinyl Sheeting	Main Hospital, 1st Floor, Area B-E, D28	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-019F	Tan Speckled Vinyl Sheeting	Main Hospital, 1st Floor, Area B-E, S14	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-019G	Tan Speckled Vinyl Sheeting	Main Hospital, 1st Floor, Area B-E, S2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-020A	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E22	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	1,700 SF
211061-A-020B	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, D4	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 020A
211061-A-020C	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 102	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 020A
211061-A-020D	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 108	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 020A
211061-A-020E	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 110	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 020A
211061-A-021A	12" x 12" White with Blue and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E20	Positive	Black Asphaltic Mastic with Grey Coating Chrysotile - 2%	Misc.	Non-Friable	Fair	High	900 SF
211061-A-021B	12" x 12" White with Blue and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B1	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2%	Misc.	Non-Friable	Fair	High	See 021A
211061-A-021C	12" x 12" White with Blue and Red Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B1	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2%	Misc.	Non-Friable	Fair	High	See 021A
211061-A-022A	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, 117	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2%	Misc.	Non-Friable	Good	High	8,000 SF
211061-A-022B	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B19	Positive	Black Asphaltic Mastic with Debris Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 022A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-022C	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, Corridor 3 Exit	Positive	Black Asphaltic Mastic with Debris Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 022A
211061-A-022D	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 1/2, Exit Corridor 2	Positive	Black Asphaltic Mastic with Debris Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 022A
211061-A-022E	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E10	Positive	Black Asphaltic Mastic with Debris Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 022A
211061-A-022F	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E18	Positive	Black Asphaltic Mastic with Debris Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 022A
211061-A-022G	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area 3/4, 417	Positive	Black Asphaltic Mastic with Debris Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 022A
211061-A-023A	Tan with Red and Blue Specks Vinyl Sheeting	Main Hospital, 1st Floor, Area B-E, B20	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-023B	Tan with Red and Blue Specks Vinyl Sheeting	Main Hospital, 1st Floor, Area B-E, B20	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-023C	Tan with Red and Blue Specks Vinyl Sheeting	Main Hospital, 1st Floor, Area B-E, B20	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-024A	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B3	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	2,800 SF
211061-A-024B	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, S20	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 024A
211061-A-024C	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, S21	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-024D	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, E9	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-024E	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-025A	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, D4	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	4,800 SF
211061-A-025B	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, S13	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 025A
211061-A-025C	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, B21	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 025A
211061-A-025D	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, S17	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 025A
211061-A-025E	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A27	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 025A
211061-A-026A	24" x 24" Gold Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C10-A	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	100 SF
211061-A-026B	24" x 24" Gold Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C10-A	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 054055A
211061-A-026C	24" x 24" Gold Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area B-E, C10-A	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 026A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-027A	12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	30 SF
211061-A-027B	12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 027A
211061-A-027C	12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 027A
211061-A-028A	12" x 12" Granite Pattern Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	70 SF
211061-A-028B	12" x 12" Granite Pattern Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Positive	Black Asphaltic Mastic with Debris Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 028A
211061-A-028C	12" x 12" Granite Pattern Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A23	Positive	Black Asphaltic Mastic with Debris Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 028A
211061-A-029A	9" x 9" Brown With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A27 Bathroom	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2% Brown Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Good	High	50 SF
211061-A-029B	9" x 9" Brown With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A27 Bathroom	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2% Brown Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 029A
211061-A-029C	9" x 9" Brown With White Streaked Resilient Flooring/Resilient Floor Mastic	Main Hospital, 1st Floor, Area A, A27 Bathroom	Positive	Black Asphaltic Mastic with Debris Chrysotile - 2% Brown Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Good	High	See 029A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-030A	6" Cream Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, 810	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-030B	6" Cream Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, B36	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-030C	6" Cream Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, D29	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-030D	6" Cream Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area A, A34	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-030E	6" Cream Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 3/4, Corridor 4 Exit	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-031A	6" Dark Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 5/6, 502	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-031B	6" Dark Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, Corridor 8 Exit	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-031C	6" Dark Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, D23	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-031D	6" Dark Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, C17	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-031E	6" Dark Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, E4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-032A	6" Dark Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, 704	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-032B	6" Dark Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, S21	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-032C	6" Dark Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, C10-A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-033A	4" Dark Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, 813	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-033B	4" Dark Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, C16	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-033C	4" Dark Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, C16A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-034A	6" Red Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, 800	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-034B	6" Red Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, B16	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-034C	6" Red Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 3/4, 403	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-035A	6" Light Green Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, 706	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-035B	6" Light Green Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, C21	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-035C	6" Light Green Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, D38	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-036A	6" Light Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, 702	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-036B	6" Light Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, E9	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-036C	6" Light Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 5/6, Corridor 5	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-036C	6" Light Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 5/6, Corridor 5	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-036D	6" Light Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, S13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-036E	6" Light Gray Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area A, A10	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-037A	6" Dark Green Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, 707	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-037B	6" Dark Green Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, 707	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-037C	6" Dark Green Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, 708	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-038A	6" Black Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, C35	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-038B	6" Black Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 7/8, 713	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-038C	6" Black Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area A, A11	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-039A	4" Dark Tan Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 5/6, 606	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-039B	4" Dark Tan Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area A, A26	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-039C	4" Dark Tan Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area A, A13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-040A	6" Dark Tan Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area A, A27	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-040B	6" Dark Tan Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, C2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-040C	6" Dark Tan Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, D25	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-041A	4" Dark Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, D30	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-041B	4" Dark Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 1/2, 102	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-041C	4" Dark Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, D4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-042A	4" Light Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, E22	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-042B	4" Light Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, E22	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-042C	4" Light Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, E18	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-043A	6" Blue Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, B1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-043B	6" Blue Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, B1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-043C	6" Blue Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, B1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-044A	Plaster	Main Hospital, 1st Floor, Area 1/2, Corridor 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-044B	Plaster	Main Hospital, 1st Floor, Area 3/4, Corridor 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-044C	Plaster	Main Hospital, 1st Floor, Area 5/6, Corridor 6	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-044D	Plaster	Main Hospital, 1st Floor, Area B-E, D/E Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-044E	Plaster	Main Hospital, 1st Floor, Area B-E, D2 Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-044F	Plaster	Main Hospital, 1st Floor, Area A, Corridor A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-044G	Plaster	Main Hospital, 1st Floor, Area 7/8, Corridor 8	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-045A	Drywall with Joint Compound	Main Hospital, 1st Floor, HQ, Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-045B	Drywall with Joint Compound	Main Hospital, 1st Floor, Area B-E, E11	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-045C	Drywall with Joint Compound	Main Hospital, 1st Floor, Area 5/6, 502	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-045D	Drywall with Joint Compound	Main Hospital, 1st Floor, Area B-E, E13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-045E	Drywall with Joint Compound	Main Hospital, 1st Floor, Area B-E, C21	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-045F	Drywall with Joint Compound	Main Hospital, 1st Floor, Area B-E, D25	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-045G	Drywall with Joint Compound	Main Hospital, 1st Floor, Area B-E, C15A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-046A	Dark Brown Hockey Puck Mastic	Main Hospital, 1st Floor, Area B-E, E22	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-046B	Dark Brown Hockey Puck Mastic	Main Hospital, 1st Floor, Area B-E, D23	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-046C	Dark Brown Hockey Puck Mastic	Main Hospital, 1st Floor, Area B-E, C16	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-046D	Dark Brown Hockey Puck Mastic	Main Hospital, 1st Floor, Area A, A23	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-046E	Dark Brown Hockey Puck Mastic	Main Hospital, 1st Floor, Area 3/4, 302	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-046F	Dark Brown Hockey Puck Mastic	Main Hospital, 1st Floor, Area B-E, B11	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-046G	Dark Brown Hockey Puck Mastic	Main Hospital, 1st Floor, Area A, A9	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-047A	6" Light Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 5/6, 506	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-047B	6" Light Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, C15	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-047C	6" Light Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 1/2, 106	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-047D	6" Light Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area B-E, B28	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-047E	6" Light Brown Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area 3/4, 406	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-048A	6" Dark Blue Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area A, A4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-048B	6" Dark Blue Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area A, A-N Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-048C	6" Dark Blue Cove Base/Cove Base Mastic	Main Hospital, 1st Floor, Area A, A-S Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-049A	2' x 2' White Pitted Ceiling Tile	Main Hospital, 1st Floor, Area 7/8, Corridor 7	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-049B	2' x 2' White Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, C15	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-049C	2' x 2' White Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, D29	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-049D	2' x 2' White Pitted Ceiling Tile	Main Hospital, 1st Floor, Area A, A10	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-049E	2' x 2' White Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, E11	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-049F	2' x 2' White Pitted Ceiling Tile	Main Hospital, 1st Floor, Area 1/2, Corridor 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-049G	2' x 2' White Pitted Ceiling Tile	Main Hospital, 1st Floor, Area 5/6, Corridor 6 Exit	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-050A	1' x 1' White Large Pitted Ceiling Tile	Main Hospital, 1st Floor, Area A, A23	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-050B	1' x 1' White Large Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B31	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-050C	1' x 1' White Large Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, E22	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-050D	1' x 1' White Large Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, C16	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-050E	1' x 1' White Large Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, C32	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-050F	1' x 1' White Large Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, C22	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-050G	1' x 1' White Large Pitted Ceiling Tile	Main Hospital, 1st Floor, Area A, A9	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-051A	1' x 1' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, C21	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-051B	1' x 1' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, D23	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-051C	1' x 1' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, E11	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-051D	1' x 1' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area A, A14	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-051E	1' x 1' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, E13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-051F	1' x 1' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area 5/6, 618	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-051G	1' x 1' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area 3/4, 302	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-052A	2' x 4' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area A, A18	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-052B	2' x 4' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B36	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-052C	2' x 4' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, D27	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-052D	2' x 4' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, E11	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-052E	2' x 4' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area A, A9	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-052F	2' x 4' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B33	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-052G	2' x 4' White Small Pitted Ceiling Tile	Main Hospital, 1st Floor, Area A, A15	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-053A	1' x 1' White Fissured Ceiling Tile	Main Hospital, 1st Floor, Area B-E, E4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-053B	1' x 1' White Fissured Ceiling Tile	Main Hospital, 1st Floor, Area B-E, E4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-053C	1' x 1' White Fissured Ceiling Tile	Main Hospital, 1st Floor, Area B-E, E4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-054A	2' x 4' White Smooth Ceiling Tile	Main Hospital, 1st Floor, Area B-E, S13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-054B	2' x 4' White Smooth Ceiling Tile	Main Hospital, 1st Floor, Area B-E, E9	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-054C	2' x 4' White Smooth Ceiling Tile	Main Hospital, 1st Floor, Area B-E, S21	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-054D	2' x 4' White Smooth Ceiling Tile	Main Hospital, 1st Floor, Area B-E, S5	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-054E	2' x 4' White Smooth Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B19	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-055A	2' x 2' Gypsum Ceiling Tile	Main Hospital, 1st Floor, Area B-E, C2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-055B	2' x 2' Gypsum Ceiling Tile	Main Hospital, 1st Floor, Area B-E, C2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-055C	2' x 2' Gypsum Ceiling Tile	Main Hospital, 1st Floor, Area B-E, C2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-056A	2' x 2' White Fissured Ceiling Tile	Main Hospital, 1st Floor, HQ, Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-056B	2' x 2' White Fissured Ceiling Tile	Main Hospital, 1st Floor, Area A, A-N Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-056C	2' x 2' White Fissured Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B34	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-057A	2' x 4' White Plastic Covered Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B19	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-057B	2' x 4' White Plastic Covered Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B19	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-057C	2' x 4' White Plastic Covered Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B19	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-058A	2' x 4' White Fissured Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B34	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-058B	2' x 4' White Fissured Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B34	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-058C	2' x 4' White Fissured Ceiling Tile	Main Hospital, 1st Floor, Area B-E, B34	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-059A	Gray Fireproofing	Main Hospital, 1st Floor, Area B-E, Corridor D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-059B	Gray Fireproofing	Main Hospital, 1st Floor, Area A, Corridor A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-059C	Gray Fireproofing	Main Hospital, 1st Floor, Area B-E, Corridor C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-059D	Gray Fireproofing	Main Hospital, 1st Floor, Area B-E, Corridor E	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-059E	Gray Fireproofing	Main Hospital, 1st Floor, Area B-E, D/E Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-059F	Gray Fireproofing	Main Hospital, 1st Floor, Area B-E, B/C Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-059G	Gray Fireproofing	Main Hospital, 1st Floor, Area B-E, B Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-060A	Wheat Tape with Yellow Insulation Pipe Wrap	Main Hospital, 1st Floor, Area B-E, Corridor E	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-060B	Wheat Tape with Yellow Insulation Pipe Wrap	Main Hospital, 1st Floor, Area B-E, B/C Corridor	Positive	Trace of Grey Loose Fibrous Material Chrysotile - 8%	TSI	Friable	Good	Moderate	4,500 SF
211061-A-060C	Wheat Tape with Yellow Insulation Pipe Wrap	Main Hospital, 1st Floor, Area B-E, C2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-060D	Wheat Tape with Yellow Insulation Pipe Wrap	Main Hospital, 1st Floor, Area B-E, B Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-060E	Wheat Tape with Yellow Insulation Pipe Wrap	Main Hospital, 1st Floor, Area A, Corridor A	Positive	Grey Loose Fibrous Material Chrysotile - 12%	TSI	Friable	Good	Moderate	See 060B
211061-A-061A	Orange Fiberglass Batting Insulation	Main Hospital, 1st Floor, Area B-E, Corridor D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-061B	Orange Fiberglass Batting Insulation	Main Hospital, 1st Floor, Area B-E, B/C Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-061C	Orange Fiberglass Batting Insulation	Main Hospital, 1st Floor, Area B-E, B Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-061D	Orange Fiberglass Batting Insulation	Main Hospital, 1st Floor, Area A, Corridor A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-061E	Orange Fiberglass Batting Insulation	Main Hospital, 1st Floor, Area B-E, Corridor C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-062A	Off White Wheat Tape	Main Hospital, 1st Floor, Area B-E, D4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-062B	Off White Wheat Tape	Main Hospital, 1st Floor, Area B-E, D4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-062C	Off White Wheat Tape	Main Hospital, 1st Floor, Area B-E, D4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-063A	2' x 4' White Insulation Ceiling Tile	Main Hospital, 1st Floor, Area A, A27	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-063B	2' x 4' White Insulation Ceiling Tile	Main Hospital, 1st Floor, Area A, A27	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-063C	2' x 4' White Insulation Ceiling Tile	Main Hospital, 1st Floor, Area A, A27	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-064A	Concrete	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-064B	Concrete	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-064C	Concrete	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-064D	Concrete	Main Hospital, 2nd Floor, Mechanical Room	Positive	Black Asphaltic Powdery Material Chrysotile - 2%	Misc.	Non-Friable	Good	High	3,700 SF

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-064E	Concrete	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-065A	Gray Brick and Mortar	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-065B	Gray Brick and Mortar	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-065C	Gray Brick and Mortar	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-065D	Gray Brick and Mortar	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-065E	Gray Brick and Mortar	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-066A	Fireproofing	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-066B	Fireproofing	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-066C	Fireproofing	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-066D	Fireproofing	Main Hospital, 2nd Floor, Mechanical Room	Positive	Grey Chalky Material with Paint Chrysotile - 7%	Surfacing	Friable	Good	High	4,500 SF
211061-A-066E	Fireproofing	Main Hospital, 2nd Floor, Mechanical Room	Positive	Grey Chalky Material with Paint Chrysotile - 7%	Surfacing	Friable	Good	High	See 066D
211061-A-067A	White Fiberglass Pipe Wrap	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-067B	White Fiberglass Pipe Wrap	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-067C	White Fiberglass Pipe Wrap	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-068A	Light Brown Boiler TSI	Main Hospital, 2nd Floor, Mechanical Room	Positive	White Fibrous Powdery Material Chrysotile - 5% Amosite - 5%	TSI	Friable	Good	High	200 SF
211061-A-068B	Light Brown Boiler TSI	Main Hospital, 2nd Floor, Mechanical Room	Positive	White Fibrous Powdery Material Chrysotile - 5% Amosite - 5%	TSI	Friable	Good	High	See 068A
211061-A-068C	Light Brown Boiler TSI	Main Hospital, 2nd Floor, Mechanical Room	Positive	White Fibrous Powdery Material Chrysotile - 5% Amosite - 5%	TSI	Friable	Good	High	See 068A
211061-A-069A	White Laced-up Pipe Insulation	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-069B	White Laced-up Pipe Insulation	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-069C	White Laced-up Pipe Insulation	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-070A	4" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	Positive	White Fibrous Powdery Material Chrysotile - 5% Amosite - 5%	TSI	Friable	Good	High	500 SF
211061-A-070B	4" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	Positive	White Fibrous Powdery Material Chrysotile - 5% Amosite - 5%	TSI	Friable	Good	High	See 070A
211061-A-070C	4" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	Positive	White Fibrous Powdery Material Chrysotile - 5% Amosite - 5%	TSI	Friable	Good	High	See 070A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-071A	2" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	Positive	White Fibrous Powdery Material Chrysotile - 5% Amosite - 5%	TSI	Friable	Good	High	600 SF
211061-A-071B	2" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	Positive	White Fibrous Powdery Material Chrysotile - 5% Amosite - 5%	TSI	Friable	Good	High	See 071A
211061-A-071C	2" Thermal System Insulation Pipe Elbows/Runs	Main Hospital, 2nd Floor, Mechanical Room	Positive	White Fibrous Powdery Material Chrysotile - 5% Amosite - 5%	TSI	Friable	Good	High	See 071A
211061-A-072A	Black HVAC Backing	Main Hospital, 2nd Floor, HVAC Intake 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-072B	Black HVAC Backing	Main Hospital, 2nd Floor, HVAC Intake 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-072C	Black HVAC Backing	Main Hospital, 2nd Floor, HVAC Intake 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-073A	Black Wall Sealant	Main Hospital, 2nd Floor, HVAC Intake 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-073B	Black Wall Sealant	Main Hospital, 2nd Floor, HVAC Intake 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-073C	Black Wall Sealant	Main Hospital, 2nd Floor, HVAC Intake 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-074A	HVAC Tape	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-074B	HVAC Tape	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-074C	HVAC Tape	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-075A	Stucco	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-075B	Stucco	Main Hospital, 2nd Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-075C	Stucco	Main Hospital, 2nd Floor, Stair	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-076A	Rolled Roof	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-076B	Rolled Roof	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-076C	Rolled Roof	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-076D	Rolled Roof	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-076E	Rolled Roof	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-076F	Rolled Roof	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-076G	Rolled Roof	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-077A	Silver Mastic	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-077A	Silver Mastic	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-077B	Silver Mastic	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-077C	Silver Mastic	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-077D	Silver Mastic	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-077E	Silver Mastic	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-078A	Exterior HVAC Tape	Main Hospital, Exterior, HVAC Platform	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-078B	Exterior HVAC Tape	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-078C	Exterior HVAC Tape	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-079A	Black Flashing Caulking	Main Hospital, Exterior, HVAC Platform	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-079B	Black Flashing Caulking	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-079C	Black Flashing Caulking	Main Hospital, Exterior, HVAC Platform	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-080A	Foil Wrap Insulation	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-080B	Foil Wrap Insulation	Main Hospital, Exterior, HVAC Platform	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-080C	Foil Wrap Insulation	Main Hospital, Exterior, HVAC Platform	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-081A	White Mounting Mastic	Main Hospital, Exterior, HVAC Platform	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-081B	White Mounting Mastic	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-081C	White Mounting Mastic	Main Hospital, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-082A	Gray & Red Roof Shingles	Main Hospital, Exterior, Awning	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-082B	Gray & Red Roof Shingles	Main Hospital, Exterior, Awning	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-082C	Gray & Red Roof Shingles	Main Hospital, Exterior, Awning	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-083A	Loose Tar/Rock	Main Hospital, Exterior, Awning	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-083B	Loose Tar/Rock	Main Hospital, Exterior, Awning	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-083C	Loose Tar/Rock	Main Hospital, Exterior, Awning	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-084A	Red Fire Stop	Main Hospital, Exterior, Elevated Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-084B	Red Fire Stop	Main Hospital, Exterior, Elevated Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-084C	Red Fire Stop	Main Hospital, Exterior, Elevated Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-085A	White Foil TSI	Main Hospital, Exterior, HVAC Platform	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-085B	White Foil TSI	Main Hospital, Exterior, HVAC Platform	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-085C	White Foil TSI	Main Hospital, Exterior, HVAC Platform	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-086A	Stucco	Main Hospital, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-086B	Stucco	Main Hospital, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-086C	Stucco	Main Hospital, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-086D	Stucco	Main Hospital, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-086E	Stucco	Main Hospital, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-086F	Stucco	Main Hospital, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-086G	Stucco	Main Hospital, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-087A	Brick and Mortar	Main Hospital, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-087B	Brick and Mortar	Main Hospital, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-087C	Brick and Mortar	Main Hospital, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-087D	Brick and Mortar	Main Hospital, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-087E	Brick and Mortar	Main Hospital, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-087F	Brick and Mortar	Main Hospital, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-087G	Brick and Mortar	Main Hospital, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-088A	Concrete	Main Hospital, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-088B	Concrete	Main Hospital, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-088C	Concrete	Main Hospital, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-088D	Concrete	Main Hospital, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-088E	Concrete	Main Hospital, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-088F	Concrete	Main Hospital, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-088G	Concrete	Main Hospital, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-089A	Concrete	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-089B	Concrete	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-089C	Concrete	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-090A	4" Thermal System Insulation Pipe Run Wrapped in Foil	Main Hospital, 1st Floor, Mechanical Room	Positive	Grey Fibrous Material Chrysotile - 10%	TSI	Friable	Good	High	200 SF
211061-A-090B	4" Thermal System Insulation Pipe Run Wrapped in Foil	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-090C	4" Thermal System Insulation Pipe Run Wrapped in Foil	Main Hospital, 1st Floor, Mechanical Room	Positive	Grey Fibrous Material Chrysotile - 10%	TSI	Friable	Good	High	See 090A
211061-A-091A	White Laced Pipe Insulation	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-091B	White Laced Pipe Insulation	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-091C	White Laced Pipe Insulation	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-092A	Red Laced Pipe Insulation	Main Hospital, Exterior, Exterior C	Positive	White Woven Fibrous Material with Coating Chrysotile - 5% Grey Loose Fibrous Material Chrysotile - 10%	TSI	Friable	Fair	High	10 SF
211061-A-092B	Red Laced Pipe Insulation	Main Hospital, Exterior, Exterior C	Positive	White Woven Fibrous Material with Coating Chrysotile - 5% Grey Loose Fibrous Material Chrysotile - 10%	TSI	Friable	Fair	High	See 092A
211061-A-092C	Red Laced Pipe Insulation	Main Hospital, Exterior, Exterior C	Positive	White Woven Fibrous Material with Coating Chrysotile - 5% Grey Loose Fibrous Material Chrysotile - 10%	TSI	Friable	Fair	High	See 092A
211061-A-093A	Yellow Ceiling Fiberglass Insulation	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-093A	Yellow Ceiling Fiberglass Insulation	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-093B	Yellow Ceiling Fiberglass Insulation	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-093C	Yellow Ceiling Fiberglass Insulation	Main Hospital, 1st Floor, Mechanical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-094A	12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic	B-13, 1st Floor, Open Area	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	450 SF

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-094B	12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic	B-13, 1st Floor, Open Area	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 094A
211061-A-094C	12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic	B-13, 1st Floor, Open Area	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 094A
211061-A-095A	12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Bank, Floor	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	110 SF
211061-A-095B	12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Bank	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 095A
211061-A-095C	12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Bank	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 095A
211061-A-096A	12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Laundromat	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	70 SF
211061-A-096B	12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Laundromat	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 096A
211061-A-096C	12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Laundromat	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 096A
211061-A-097A	Carpet Glue	B-13, 1st Floor, Theater	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-097B	Carpet Glue	B-13, 1st Floor, Theater	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-097C	Carpet Glue	B-13, 1st Floor, Restaurant	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-098A	12" x 12" Brown with Olive Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-098B	12" x 12" Brown with Olive Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-098C	12" x 12" Brown with Olive Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-099A	12" x 12" Pink with Black and White Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-099A	12" x 12" Pink with Black and White Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-099B	12" x 12" Pink with Black and White Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-099B	12" x 12" Pink with Black and White Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-099C	12" x 12" Pink with Black and White Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-099C	12" x 12" Pink with Black and White Stripes Resilient Floor Tile/Resilient Floor Mastic	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-100A	Concrete	B-13, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-100B	Concrete	B-13, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-100C	Concrete	B-13, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-101A	4" Black Cove Base/Cove Base Mastic	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-101B	4" Black Cove Base/Cove Base Mastic	B-13, 1st Floor, Restaurant	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-101C	4" Black Cove Base/Cove Base Mastic	B-13, 1st Floor, Laundromat	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-102A	Drywall with Joint Compound	B-13, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-102B	Drywall with Joint Compound	B-13, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-102C	Drywall with Joint Compound	B-13, 1st Floor, Theater	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-102D	Drywall with Joint Compound	B-13, 1st Floor, Bathroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-102E	Drywall with Joint Compound	B-13, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-103A	Acoustic Spray-On	B-13, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-103B	Acoustic Spray-On	B-13, 1st Floor, Theater	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-103C	Acoustic Spray-On	B-13, 1st Floor, Laundromat	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-103D	Acoustic Spray-On	B-13, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-103E	Acoustic Spray-On	B-13, 1st Floor, Market	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-104A	6" Black Cove Base/Cove Base Mastic	B-13, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-104B	6" Black Cove Base/Cove Base Mastic	B-13, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-104C	6" Black Cove Base/Cove Base Mastic	B-13, 1st Floor, Theater	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-105A	Exterior Stucco with Vapor Barrier	B-13, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-105B	Exterior Stucco with Vapor Barrier	B-13, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-105C	Exterior Stucco with Vapor Barrier	B-13, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-105D	Exterior Stucco with Vapor Barrier	B-13, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-105E	Exterior Stucco with Vapor Barrier	B-13, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-106A	Concrete	B-13, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-106B	Concrete	B-13, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-106C	Concrete	B-13, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-107A	Shingle Roof	B-13, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-107B	Shingle Roof	B-13, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-107C	Shingle Roof	B-13, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-107D	Shingle Roof	B-13, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-107E	Shingle Roof	B-13, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-108A	12" x 12" Brown with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic	B-12, 1st Floor, Bathroom	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Fair	High	20 SF
211061-A-108B	12" x 12" Brown with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic	B-12, 1st Floor, Bathroom	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Fair	High	See 108A
211061-A-108C	12" x 12" Brown with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic	B-12, 1st Floor, Bathroom	Positive	Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Fair	High	See 108A
211061-A-109A	Concrete	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-109B	Concrete	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-109C	Concrete	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-109D	Concrete	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-109E	Concrete	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-110A	Drywall with Joint Compound	B-12, 1st Floor, Bathroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-110B	Drywall with Joint Compound	B-12, 1st Floor, Bathroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-110C	Drywall with Joint Compound	B-12, 1st Floor, Bathroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-111A	2' x 2' Fissured Ceiling Tile	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-111B	2' x 2' Fissured Ceiling Tile	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-111C	2' x 2' Fissured Ceiling Tile	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-112A	2' x 4' Pitted Ceiling Tile	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-112B	2' x 4' Pitted Ceiling Tile	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-112C	2' x 4' Pitted Ceiling Tile	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-112D	2' x 4' Pitted Ceiling Tile	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-112E	2' x 4' Pitted Ceiling Tile	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-113A	Fiberglass Batting Insulation	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-113B	Fiberglass Batting Insulation	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-113C	Fiberglass Batting Insulation	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-113D	Fiberglass Batting Insulation	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-113E	Fiberglass Batting Insulation	B-12, 1st Floor, Open Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-114A	4" Black Cove Base/Cove Base Mastic	B-12, 1st Floor, Bathroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-114B	4" Black Cove Base/Cove Base Mastic	B-12, 1st Floor, Bathroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-114C	4" Black Cove Base/Cove Base Mastic	B-12, 1st Floor, Bathroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-115A	Foil Wrap Insulation	B-12, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-115B	Foil Wrap Insulation	B-12, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-115C	Foil Wrap Insulation	B-12, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-116A	Stucco	B-12, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-116B	Stucco	B-12, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-116C	Stucco	B-12, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-117A	Concrete	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-117B	Concrete	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-117C	Concrete	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-118A	4" Brown Cove Base/Cove Base Mastic	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-118B	4" Brown Cove Base/Cove Base Mastic	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-118C	4" Brown Cove Base/Cove Base Mastic	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-119A	Fireproofing	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-119B	Fireproofing	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-119C	Fireproofing	Emergency Power Building, 1st Floor, Generator Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-120A	Drywall with Joint Compound	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-120B	Drywall with Joint Compound	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-120C	Drywall with Joint Compound	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-120D	Drywall with Joint Compound	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-120E	Drywall with Joint Compound	Emergency Power Building, 1st Floor, Walkway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-121A	Woven Pipe Wrap	Emergency Power Building, 1st Floor, Generator Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-121B	Woven Pipe Wrap	Emergency Power Building, 1st Floor, Generator Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-121C	Woven Pipe Wrap	Emergency Power Building, 1st Floor, Generator Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-122A	Brick and Mortar	Emergency Power Building, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-122B	Brick and Mortar	Emergency Power Building, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-122C	Brick and Mortar	Emergency Power Building, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-122D	Brick and Mortar	Emergency Power Building, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-122E	Brick and Mortar	Emergency Power Building, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-123A	Rolled Roof	Emergency Power Building, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-123B	Rolled Roof	Emergency Power Building, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-123C	Rolled Roof	Emergency Power Building, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-124A	Tan HVAC Mastic	Emergency Power Building, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-124B	Tan HVAC Mastic	Emergency Power Building, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-124C	Tan HVAC Mastic	Emergency Power Building, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-125A	Black Mounting Mastic	Emergency Power Building, Exterior, Roof	Positive	Black Asphaltic Mastic Chrysotile - 2%	Surfacing	Non-Friable	Good	Moderate	10 SF
211061-A-125B	Black Mounting Mastic	Emergency Power Building, Exterior, Roof	Positive	Black Asphaltic Mastic Chrysotile - 2%	Surfacing	Non-Friable	Good	Moderate	See 125A
211061-A-125C	Black Mounting Mastic	Emergency Power Building, Exterior, Roof	Positive	Black Asphaltic Mastic Chrysotile - 2%	Surfacing	Non-Friable	Good	Moderate	See 125A
211061-A-126A	12" x 12" Brown with White Streaked Resilient Flooring/Resilient Floor Mastic	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-126B	12" x 12" Brown with White Streaked Resilient Flooring/Resilient Floor Mastic	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-126C	12" x 12" Brown with White Streaked Resilient Flooring/Resilient Floor Mastic	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-127A	4" Brown Cove Base/Cove Base Mastic	B-10, 1st Floor, Bathroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-127B	4" Brown Cove Base/Cove Base Mastic	B-10, 1st Floor, Bathroom 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-127C	4" Brown Cove Base/Cove Base Mastic	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-128A	Drywall with Joint Compound	B-10, 1st Floor, Bathroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-128B	Drywall with Joint Compound	B-10, 1st Floor, Bathroom 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-128C	Drywall with Joint Compound	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-129A	2' x 4' Pitted Ceiling Tile	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-129B	2' x 4' Pitted Ceiling Tile	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-129C	2' x 4' Pitted Ceiling Tile	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-130A	Fiberglass Batting Insulation	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-130B	Fiberglass Batting Insulation	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-130C	Fiberglass Batting Insulation	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-131A	HVAC Tape	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-131B	HVAC Tape	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-131C	HVAC Tape	B-10, 1st Floor, Main Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-132A	Rolled Roof	B-10, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-132B	Rolled Roof	B-10, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-132C	Rolled Roof	B-10, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-133A	Silver Mastic	B-10, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 4%	Surfacing	Non-Friable	Good	High	1 SF
211061-A-133B	Silver Mastic	B-10, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 4%	Surfacing	Non-Friable	Good	High	See 133A
211061-A-133C	Silver Mastic	B-10, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 4%	Surfacing	Non-Friable	Good	High	See 133A
211061-A-134A	Concrete	B-10, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-134B	Concrete	B-10, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-134C	Concrete	B-10, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-135A	Brick and Mortar	Hazardous Waste, Exterior, Exterior A	Positive	White Sandy Material with Coating Chrysotile - <1% Point Count - <0.1%	Misc.	Non-Friable	Good	High	500 SF
211061-A-135B	Brick and Mortar	Hazardous Waste, Exterior, Exterior C	Positive	White Sandy Material with Coating Chrysotile - <1% Point Count - <0.1%	Misc.	Non-Friable	Good	High	See 135A
211061-A-135C	Brick and Mortar	Hazardous Waste, Exterior, Exterior D	Positive	White Sandy Material with Coating Chrysotile - <1% Point Count - <0.1%	Misc.	Non-Friable	Good	High	See 135A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-136A	Concrete	Hazardous Waste, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-136B	Concrete	Hazardous Waste, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-136C	Concrete	Hazardous Waste, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-137A	Asphalt Roof	Hazardous Waste, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-137B	Asphalt Roof	Hazardous Waste, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-137C	Asphalt Roof	Hazardous Waste, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-138A	Carpet Glue	B-02, 1st Floor, South Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-138B	Carpet Glue	B-02, 1st Floor, Doctors Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-138C	Carpet Glue	B-02, 1st Floor, South Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-138D	Carpet Glue	B-02, 1st Floor, Doctors Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-138E	Carpet Glue	B-02, 1st Floor, Doctors Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-139A	12" x 12" Blue with White Streaked Vinyl Tile	B-02, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-139B	12" x 12" Blue with White Streaked Vinyl Tile	B-02, 1st Floor, Exam Room 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-139C	12" x 12" Blue with White Streaked Vinyl Tile	B-02, 1st Floor, Exam Room 6	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-139D	12" x 12" Blue with White Streaked Vinyl Tile	B-02, 1st Floor, Exam Room 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-139E	12" x 12" Blue with White Streaked Vinyl Tile	B-02, 1st Floor, Exam Room 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-140A	Dark Blue with White Spots Vinyl Sheeting	B-02, 1st Floor, Janitor	Positive	Tan/Black Asphaltic Mastic Chrysotile - 2%	Misc.	Non-Friable	Good	High	150 SF
211061-A-140B	Dark Blue with White Spots Vinyl Sheeting	B-02, 1st Floor, Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-140C	Dark Blue with White Spots Vinyl Sheeting	B-02, 1st Floor, Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-141A	4" Light Brown Cove Base/Cove Base Mastic	B-02, 1st Floor, South Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-141B	4" Light Brown Cove Base/Cove Base Mastic	B-02, 1st Floor, Charting	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-141C	4" Light Brown Cove Base/Cove Base Mastic	B-02, 1st Floor, North Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-142A	4" Dark Green Cove Base/Cove Base Mastic	B-02, 1st Floor, Medical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-142B	4" Dark Green Cove Base/Cove Base Mastic	B-02, 1st Floor, Exam Room 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-142C	4" Dark Green Cove Base/Cove Base Mastic	B-02, 1st Floor, Exam Room 6	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-143A	4" Brown Cove Base/Cove Base Mastic	B-02, 1st Floor, Doctors Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-143B	4" Brown Cove Base/Cove Base Mastic	B-02, 1st Floor, Doctors Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-143C	4" Brown Cove Base/Cove Base Mastic	B-02, 1st Floor, Doctors Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-144A	Drywall with Joint Compound	B-02, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-144B	Drywall with Joint Compound	B-02, 1st Floor, Triage	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-144C	Drywall with Joint Compound	B-02, 1st Floor, Specialty Treatment Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-144D	Drywall with Joint Compound	B-02, 1st Floor, Exam Room 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-144E	Drywall with Joint Compound	B-02, 1st Floor, Charting	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-144F	Drywall with Joint Compound	B-02, 1st Floor, Medical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-144G	Drywall with Joint Compound	B-02, 1st Floor, Utility Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-145A	2' x 2' Pitted Ceiling Tile	B-02, 1st Floor, South Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-145B	2' x 2' Pitted Ceiling Tile	B-02, 1st Floor, Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-145C	2' x 2' Pitted Ceiling Tile	B-02, 1st Floor, Specialty Treatment Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-145D	2' x 2' Pitted Ceiling Tile	B-02, 1st Floor, Triage	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-145E	2' x 2' Pitted Ceiling Tile	B-02, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-146A	2' x 4' Fissured Ceiling Tile	B-02, 1st Floor, Work Up Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-146B	2' x 4' Fissured Ceiling Tile	B-02, 1st Floor, Work Up Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-146C	2' x 4' Fissured Ceiling Tile	B-02, 1st Floor, Work Up Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-147A	Fiberglass Batting Insulation	B-02, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-147B	Fiberglass Batting Insulation	B-02, 1st Floor, North Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-147C	Fiberglass Batting Insulation	B-02, 1st Floor, Charting	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-147D	Fiberglass Batting Insulation	B-02, 1st Floor, South Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-147E	Fiberglass Batting Insulation	B-02, 1st Floor, South Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-148A	Foil Wrap	B-02, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-148B	Foil Wrap	B-02, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-148C	Foil Wrap	B-02, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-149A	Black Mastic	B-02, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-149B	Black Mastic	B-02, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-149C	Black Mastic	B-02, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-150A	Foil Pipe Wrap with Insulation	B-02, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-150B	Foil Pipe Wrap with Insulation	B-02, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-150C	Foil Pipe Wrap with Insulation	B-02, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-151A	Rolled Roof	B-02, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-151B	Rolled Roof	B-02, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-151C	Rolled Roof	B-02, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-151D	Rolled Roof	B-02, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-151E	Rolled Roof	B-02, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-152A	Penetration Mastic	B-02, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-152B	Penetration Mastic	B-02, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-152C	Penetration Mastic	B-02, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-153A	Light Gray Vinyl Sheeting	B-03, 1st Floor, Peds Waiting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-153B	Light Gray Vinyl Sheeting	B-03, 1st Floor, Peds Waiting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-153C	Light Gray Vinyl Sheeting	B-03, 1st Floor, Peds Waiting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-154A	Carpet Glue with Vinyl Flooring	B-03, 1st Floor, Registration	Positive	Cream Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Good	Moderate	900 SF
211061-A-154B	Carpet Glue with Vinyl Flooring	B-03, 1st Floor, Registration	Positive	Cream Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Good	Moderate	See 154A
211061-A-154C	Carpet Glue with Vinyl Flooring	B-03, 1st Floor, PFS Sup. Office	Positive	Cream Floor Tile Chrysotile - 3%	Misc.	Non-Friable	Good	Moderate	See 154A
211061-A-155A	4" Light Brown Cove Base/Cove Base Mastic	B-03, 1st Floor, Peds Waiting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-155B	4" Light Brown Cove Base/Cove Base Mastic	B-03, 1st Floor, Registration	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-155C	4" Light Brown Cove Base/Cove Base Mastic	B-03, 1st Floor, Ops	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-156A	Drywall with Joint Compound	B-03, 1st Floor, Peds Waiting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-156B	Drywall with Joint Compound	B-03, 1st Floor, Registration	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-156C	Drywall with Joint Compound	B-03, 1st Floor, PFS Sup. Office	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-156D	Drywall with Joint Compound	B-03, 1st Floor, SGT Office	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-156E	Drywall with Joint Compound	B-03, 1st Floor, Storage	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-157A	2' x 4' White Fissured Ceiling Tile	B-03, 1st Floor, Peds Waiting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-157B	2' x 4' White Fissured Ceiling Tile	B-03, 1st Floor, Peds Waiting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-157C	2' x 4' White Fissured Ceiling Tile	B-03, 1st Floor, Registration	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-158A	Yellow Fiberglass Batting Insulation	B-03, 1st Floor, Registration	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-158B	Yellow Fiberglass Batting Insulation	B-03, 1st Floor, Peds Waiting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-158C	Yellow Fiberglass Batting Insulation	B-03, 1st Floor, Ops	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-159A	Foil HVAC Tape	B-03, 1st Floor, Peds Waiting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-159B	Foil HVAC Tape	B-03, 1st Floor, Registration	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-159C	Foil HVAC Tape	B-03, 1st Floor, Ops	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-160A	2' x 2' White Pitted Ceiling Tile	B-03, 1st Floor, Ops	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-160A	2' x 2' White Pitted Ceiling Tile	B-03, 1st Floor, Ops	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-160B	2' x 2' White Pitted Ceiling Tile	B-03, 1st Floor, Report Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-160C	2' x 2' White Pitted Ceiling Tile	B-03, 1st Floor, SGT Office	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-161A	Glue with Leveling Compound	B-03, 1st Floor, Report Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-161B	Glue with Leveling Compound	B-03, 1st Floor, Storage	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-161C	Glue with Leveling Compound	B-03, 1st Floor, SGT Office	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-162A	Foil Wrap Insulation	B-03, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-162B	Foil Wrap Insulation	B-03, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-162C	Foil Wrap Insulation	B-03, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-163A	Black Mastic	B-03, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-163B	Black Mastic	B-03, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-163C	Black Mastic	B-03, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-164A	Penetration Mastic	B-03, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 2%	Surfacing	Non-Friable	Good	Low	10 SF

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-164B	Penetration Mastic	B-03, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 2%	Surfacing	Non-Friable	Good	Low	See 164A
211061-A-164C	Penetration Mastic	B-03, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 2%	Surfacing	Non-Friable	Good	Low	See 164A
211061-A-165A	12" x 12" Brown with Dark Brown and White Resilient Floor Tile/Resilient Floor Mastic	B-05, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-165B	12" x 12" Brown with Dark Brown and White Resilient Floor Tile/Resilient Floor Mastic	B-05, 1st Floor, Pharmacy	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-165C	12" x 12" Brown with Dark Brown and White Resilient Floor Tile/Resilient Floor Mastic	B-05, 1st Floor, Entry	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-165D	12" x 12" Brown with Dark Brown and White Resilient Floor Tile/Resilient Floor Mastic	B-05, 1st Floor, Main Lobby	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-165E	12" x 12" Brown with Dark Brown and White Resilient Floor Tile/Resilient Floor Mastic	B-05, 1st Floor, Exam Room 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-166A	White Pebbled Vinyl Sheeting	B-05, 1st Floor, Restroom 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-166B	White Pebbled Vinyl Sheeting	B-05, 1st Floor, Janitor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-166C	White Pebbled Vinyl Sheeting	B-05, 1st Floor, Janitor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-167A	12" x 12" Tan with Brown Resilient Floor Tile/Resilient Floor Mastic	B-05, 1st Floor, Exam Room 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-167B	12" x 12" Tan with Brown Resilient Floor Tile/Resilient Floor Mastic	B-05, 1st Floor, Exam Room 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-167C	12" x 12" Tan with Brown Resilient Floor Tile/Resilient Floor Mastic	B-05, 1st Floor, Exam Room 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-168A	Tan with Brown Vinyl Sheeting	B-05, 1st Floor, Restroom 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-168B	Tan with Brown Vinyl Sheeting	B-05, 1st Floor, Restroom 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-168C	Tan with Brown Vinyl Sheeting	B-05, 1st Floor, Restroom 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-169A	Carpet Glue	B-05, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-169B	Carpet Glue	B-05, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-169C	Carpet Glue	B-05, 1st Floor, Sitting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-170A	6" Burgundy Cove Base/Cove Base Mastic	B-05, 1st Floor, Main Lobby	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-170B	6" Burgundy Cove Base/Cove Base Mastic	B-05, 1st Floor, Pharmacy	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-170C	6" Burgundy Cove Base/Cove Base Mastic	B-05, 1st Floor, Exam Room 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-171A	6" Gray Cove Base/Cove Base Mastic	B-05, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-171B	6" Gray Cove Base/Cove Base Mastic	B-05, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-171C	6" Gray Cove Base/Cove Base Mastic	B-05, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-172A	6" Pink Cove Base/Cove Base Mastic	B-05, 1st Floor, Sitting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-172B	6" Pink Cove Base/Cove Base Mastic	B-05, 1st Floor, Sitting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-172C	6" Pink Cove Base/Cove Base Mastic	B-05, 1st Floor, Sitting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-173A	6" Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Cashier 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-173B	6" Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Cashier 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-173C	6" Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Cashier 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-174A	6" Dark Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Cashier 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-174A	6" Dark Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Cashier 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-174B	6" Dark Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Cashier 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-174C	6" Dark Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Cashier 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-175A	4" Dark Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Restroom 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-175B	4" Dark Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Restroom 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-175C	4" Dark Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Electrical Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-176A	4" Blue Cove Base/Cove Base Mastic	B-05, 1st Floor, Restroom 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-176B	4" Blue Cove Base/Cove Base Mastic	B-05, 1st Floor, Restroom 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-176C	4" Blue Cove Base/Cove Base Mastic	B-05, 1st Floor, Restroom 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-177A	Drywall with Joint Compound	B-05, 1st Floor, Pharmacy	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-177B	Drywall with Joint Compound	B-05, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-177C	Drywall with Joint Compound	B-05, 1st Floor, South Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-177D	Drywall with Joint Compound	B-05, 1st Floor, Pharmacy	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-177E	Drywall with Joint Compound	B-05, 1st Floor, Exam Room 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-177F	Drywall with Joint Compound	B-05, 1st Floor, Cashier 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-177G	Drywall with Joint Compound	B-05, 1st Floor, Main Lobby	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-178A	2' x 4' White Fissured Ceiling Tile	B-05, 1st Floor, Main Lobby	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-178B	2' x 4' White Fissured Ceiling Tile	B-05, 1st Floor, Cashier 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-178C	2' x 4' White Fissured Ceiling Tile	B-05, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-178D	2' x 4' White Fissured Ceiling Tile	B-05, 1st Floor, Pharmacy	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-178E	2' x 4' White Fissured Ceiling Tile	B-05, 1st Floor, Cashier 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-179A	2' x 2' White Pitted Ceiling Tile	B-05, 1st Floor, Sitting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-179B	2' x 2' White Pitted Ceiling Tile	B-05, 1st Floor, Sitting Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-179C	2' x 2' White Pitted Ceiling Tile	B-05, 1st Floor, Entry	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-180A	2' x 4' White Smooth Ceiling Tile	B-05, 1st Floor, Restroom 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-180B	2' x 4' White Smooth Ceiling Tile	B-05, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-180C	2' x 4' White Smooth Ceiling Tile	B-05, 1st Floor, Restroom 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-181A	Foil HVAC Wrap with Sealant	B-05, 1st Floor, Pharmacy	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-181B	Foil HVAC Wrap with Sealant	B-05, 1st Floor, Cashier 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-181C	Foil HVAC Wrap with Sealant	B-05, 1st Floor, Cashier 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-182A	Yellow Fiberglass Batting Insulation	B-05, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-182B	Yellow Fiberglass Batting Insulation	B-05, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-182C	Yellow Fiberglass Batting Insulation	B-05, 1st Floor, Office 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-182D	Yellow Fiberglass Batting Insulation	B-05, 1st Floor, Cashier 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-182E	Yellow Fiberglass Batting Insulation	B-05, 1st Floor, Cashier 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-183A	2' x 4' Foil Wrapped Ceiling Tile	B-05, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-183B	2' x 4' Foil Wrapped Ceiling Tile	B-05, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-183C	2' x 4' Foil Wrapped Ceiling Tile	B-05, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-184A	6" Light Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Cashier 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-184B	6" Light Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-184C	6" Light Brown Cove Base/Cove Base Mastic	B-05, 1st Floor, Office 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-185A	Woven Roof Material with Sealant	B-03, Exterior, Roof	Positive	Black Fibrous Woven Asphaltic Material with Coating Chrysotile - 2%	Misc.	Non-Friable	Fair	Low	1,400 SF
211061-A-185B	Woven Roof Material with Sealant	B-03, Exterior, Roof	Positive	Black Fibrous Woven Asphaltic Material with Coating Chrysotile - 2%	Misc.	Non-Friable	Fair	Low	See 185A
211061-A-185C	Woven Roof Material with Sealant	B-03, Exterior, Roof	Positive	Black Fibrous Woven Asphaltic Material with Coating Chrysotile - 2%	Misc.	Non-Friable	Fair	Low	See 185A
211061-A-185D	Woven Roof Material with Sealant	B-03, Exterior, Roof	Positive	Black Fibrous Woven Asphaltic Material with Coating Chrysotile - 2%	Misc.	Non-Friable	Fair	Low	See 185A
211061-A-185E	Woven Roof Material with Sealant	B-03, Exterior, Roof	Positive	Black Fibrous Woven Asphaltic Material with Coating Chrysotile - 2%	Misc.	Non-Friable	Fair	Low	See 185A
211061-A-186A	Drywall with Joint Compound	B-08, 1st Floor, South Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-186B	Drywall with Joint Compound	B-08, 1st Floor, Office 8	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-186C	Drywall with Joint Compound	B-08, 1st Floor, Office 10	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-186D	Drywall with Joint Compound	B-08, 1st Floor, Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-186E	Drywall with Joint Compound	B-08, 1st Floor, RR 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-186F	Drywall with Joint Compound	B-08, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-186G	Drywall with Joint Compound	B-08, 1st Floor, Administration	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-187A	12" x 12" White with Black and Blue Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-08, 1st Floor, Administration	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-187B	12" x 12" White with Black and Blue Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-08, 1st Floor, East Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-187C	12" x 12" White with Black and Blue Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-08, 1st Floor, Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-187D	12" x 12" White with Black and Blue Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-08, 1st Floor, South Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-187E	12" x 12" White with Black and Blue Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-08, 1st Floor, Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-188A	2' x 4' White Fissured Ceiling Tile	B-08, 1st Floor, South Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-188B	2' x 4' White Fissured Ceiling Tile	B-08, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-188C	2' x 4' White Fissured Ceiling Tile	B-08, 1st Floor, Office 10	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-188D	2' x 4' White Fissured Ceiling Tile	B-08, 1st Floor, Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-188E	2' x 4' White Fissured Ceiling Tile	B-08, 1st Floor, Electrical	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-189A	4" Green Cove Base/Cove Base Mastic	B-08, 1st Floor, Office 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-189B	4" Green Cove Base/Cove Base Mastic	B-08, 1st Floor, Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-189C	4" Green Cove Base/Cove Base Mastic	B-08, 1st Floor, Office 7	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-190A	Brown Speckled Vinyl Sheeting	B-08, 1st Floor, RR 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-190B	Brown Speckled Vinyl Sheeting	B-08, 1st Floor, RR 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-190C	Brown Speckled Vinyl Sheeting	B-08, 1st Floor, RR 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-191A	Carpet Glue	B-08, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-191B	Carpet Glue	B-08, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-191C	Carpet Glue	B-08, 1st Floor, Office 5	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-191D	Carpet Glue	B-08, 1st Floor, Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-191E	Carpet Glue	B-08, 1st Floor, Office 10	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-192A	Concrete	B-08, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-192B	Concrete	B-08, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-192C	Concrete	B-08, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-193A	White Roof Material	B-08, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-193B	White Roof Material	B-08, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-193C	White Roof Material	B-08, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-193D	White Roof Material	B-08, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-193E	White Roof Material	B-08, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-194A	Black Penetration Mastic	B-08, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-194B	Black Penetration Mastic	B-08, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-194C	Black Penetration Mastic	B-08, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-195A	White HVAC Caulking	B-08, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-195B	White HVAC Caulking	B-08, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-195C	White HVAC Caulking	B-08, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-196A	Brown HVAC Caulking	B-08, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-196B	Brown HVAC Caulking	B-08, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-196C	Brown HVAC Caulking	B-08, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-197A	HVAC Tape	B-08, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-197B	HVAC Tape	B-08, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-197C	HVAC Tape	B-08, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-198A	Carpet Glue	B-07, 1st Floor, Library	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-198B	Carpet Glue	B-07, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-198C	Carpet Glue	B-07, 1st Floor, Office 8	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-198D	Carpet Glue	B-07, 1st Floor, Office 7	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-198E	Carpet Glue	B-07, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-199A	12" x 12" Gray with White Streaked Vinyl Floor Tile/Vinyl Flooring Mastic	B-07, 1st Floor, Restroom 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-199B	12" x 12" Gray with White Streaked Vinyl Floor Tile/Vinyl Flooring Mastic	B-07, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-199C	12" x 12" Gray with White Streaked Vinyl Floor Tile/Vinyl Flooring Mastic	B-07, 1st Floor, Janitor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-200A	4" Gray Cove Base/Cove Base Mastic	B-07, 1st Floor, Office 13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-200B	4" Gray Cove Base/Cove Base Mastic	B-07, 1st Floor, Office 8	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-200C	4" Gray Cove Base/Cove Base Mastic	B-07, 1st Floor, Office 5	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-201A	4" Brown Cove Base/Cove Base Mastic	B-07, 1st Floor, North Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-201B	4" Brown Cove Base/Cove Base Mastic	B-07, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-201C	4" Brown Cove Base/Cove Base Mastic	B-07, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-201D	4" Brown Cove Base/Cove Base Mastic	B-07, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-202A	6" Gray Cove Base/Cove Base Mastic	B-07, 1st Floor, Restroom 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-202B	6" Gray Cove Base/Cove Base Mastic	B-07, 1st Floor, Restroom 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-202C	6" Gray Cove Base/Cove Base Mastic	B-07, 1st Floor, Restroom 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-203A	6" Light Gray Cove Base/Cove Base Mastic	B-07, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-203B	6" Light Gray Cove Base/Cove Base Mastic	B-07, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-203C	6" Light Gray Cove Base/Cove Base Mastic	B-07, 1st Floor, Restroom 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-204A	Drywall with Joint Compound	B-07, 1st Floor, Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-204B	Drywall with Joint Compound	B-07, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-204C	Drywall with Joint Compound	B-07, 1st Floor, Library	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-204D	Drywall with Joint Compound	B-07, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-204E	Drywall with Joint Compound	B-07, 1st Floor, Office 8	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-204F	Drywall with Joint Compound	B-07, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-204G	Drywall with Joint Compound	B-07, 1st Floor, Office 7	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-205A	2' x 4' White Pitted Ceiling Tile	B-07, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-205B	2' x 4' White Pitted Ceiling Tile	B-07, 1st Floor, Office 10	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-205C	2' x 4' White Pitted Ceiling Tile	B-07, 1st Floor, North Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-205D	2' x 4' White Pitted Ceiling Tile	B-07, 1st Floor, Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-205E	2' x 4' White Pitted Ceiling Tile	B-07, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-206A	Foil Wrap HVAC Tape	B-07, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-206B	Foil Wrap HVAC Tape	B-07, 1st Floor, Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-206C	Foil Wrap HVAC Tape	B-07, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-207A	Stucco on Concrete	B-07, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-207B	Stucco on Concrete	B-07, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-207C	Stucco on Concrete	B-07, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-208A	Rolled Roof	B-07, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-208B	Rolled Roof	B-07, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-208C	Rolled Roof	B-07, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-208D	Rolled Roof	B-07, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-208E	Rolled Roof	B-07, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-209A	Silver Penetration Mastic	B-07, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-209B	Silver Penetration Mastic	B-07, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-209C	Silver Penetration Mastic	B-07, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-210A	Blue with White and Black Vinyl Sheeting	B-01, 1st Floor, Main Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-210B	Blue with White and Black Vinyl Sheeting	B-01, 1st Floor, Restroom Handicapped	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-210C	Blue with White and Black Vinyl Sheeting	B-01, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-210D	Blue with White and Black Vinyl Sheeting	B-01, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-210E	Blue with White and Black Vinyl Sheeting	B-01, 1st Floor, East Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-211A	12" x 12" Blue with White Streaked Vinyl Floor Tile/Vinyl Flooring Mastic	B-01, 1st Floor, W/H Closet	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-211B	12" x 12" Blue with White Streaked Vinyl Floor Tile/Vinyl Flooring Mastic	B-01, 1st Floor, W/H Closet	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-211C	12" x 12" Blue with White Streaked Vinyl Floor Tile/Vinyl Flooring Mastic	B-01, 1st Floor, W/H Closet	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-212A	Carpet Glue	B-01, 1st Floor, Medical Social Workers Director	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-212B	Carpet Glue	B-01, 1st Floor, Volunteer Director	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-212C	Carpet Glue	B-01, 1st Floor, Patient Financial Services Workers	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-212D	Carpet Glue	B-01, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-212E	Carpet Glue	B-01, 1st Floor, Tel/Comm	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-213A	4" Light Brown Cove Base/Cove Base Mastic	B-01, 1st Floor, MSW Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-213B	4" Light Brown Cove Base/Cove Base Mastic	B-01, 1st Floor, Utilization Review Office	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-213C	4" Light Brown Cove Base/Cove Base Mastic	B-01, 1st Floor, Community Health Plan	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-214A	4" Cream Cove Base/Cove Base Mastic	B-01, 1st Floor, East Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-214B	4" Cream Cove Base/Cove Base Mastic	B-01, 1st Floor, Main Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-214C	4" Cream Cove Base/Cove Base Mastic	B-01, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-215A	4" Gray Cove Base/Cove Base Mastic	B-01, 1st Floor, W/H Closet	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-215B	4" Gray Cove Base/Cove Base Mastic	B-01, 1st Floor, Patient Financial Services Workers	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-215C	4" Gray Cove Base/Cove Base Mastic	B-01, 1st Floor, Tel/Comm	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-216A	Drywall with Joint Compound	B-01, 1st Floor, Restroom Handicapped	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-216B	Drywall with Joint Compound	B-01, 1st Floor, Volunteers	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-216C	Drywall with Joint Compound	B-01, 1st Floor, MSW Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-216D	Drywall with Joint Compound	B-01, 1st Floor, Nursing Inservice Director	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-216E	Drywall with Joint Compound	B-01, 1st Floor, PFSW Supervisor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-216F	Drywall with Joint Compound	B-01, 1st Floor, Community Health Plan	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-216G	Drywall with Joint Compound	B-01, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-217A	2' x 4' White Pitted Ceiling Tile	B-01, 1st Floor, Medical Social Workers Director	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-217B	2' x 4' White Pitted Ceiling Tile	B-01, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-217C	2' x 4' White Pitted Ceiling Tile	B-01, 1st Floor, PFSW Supervisor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-217D	2' x 4' White Pitted Ceiling Tile	B-01, 1st Floor, Volunteers	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-217E	2' x 4' White Pitted Ceiling Tile	B-01, 1st Floor, Nursing Inservice	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-218A	4" Black Cove Base/Cove Base Mastic	B-01, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-218B	4" Black Cove Base/Cove Base Mastic	B-01, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-218C	4" Black Cove Base/Cove Base Mastic	B-01, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-219A	Brick and Mortar	B-01, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-219B	Brick and Mortar	B-01, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-219C	Brick and Mortar	B-01, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-220A	Rolled Roof	B-01, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-220B	Rolled Roof	B-01, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-220C	Rolled Roof	B-01, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-220D	Rolled Roof	B-01, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-220E	Rolled Roof	B-01, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-221A	Silver Penetration Mastic	B-01, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 3%	Surfacing	Non-Friable	Good	Low	10 SF
211061-A-221B	Silver Penetration Mastic	B-01, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 3%	Surfacing	Non-Friable	Good	Low	See 221A
211061-A-221C	Silver Penetration Mastic	B-01, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 3%	Surfacing	Non-Friable	Good	Low	See 221A
211061-A-222A	Brick and Mortar	B-05, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-222B	Brick and Mortar	B-05, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-222C	Brick and Mortar	B-05, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-223A	Rolled Roof	B-05, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-223B	Rolled Roof	B-05, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-223C	Rolled Roof	B-05, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-223D	Rolled Roof	B-05, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-223E	Rolled Roof	B-05, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-224A	Brown Penetration Mastic	B-05, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-224B	Brown Penetration Mastic	B-05, Exterior, Roof	Positive	Black Asphaltic Material Chrysotile - 2%	Surfacing	Non-Friable	Good	Low	10 SF
211061-A-224C	Brown Penetration Mastic	B-05, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-225A	12" x 12" White with Brown Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-04, 1st Floor, East Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-225B	12" x 12" White with Brown Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-04, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-225C	12" x 12" White with Brown Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-04, 1st Floor, Psychology Room 113	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-225D	12" x 12" White with Brown Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-04, 1st Floor, Nurse Med. Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-225E	12" x 12" White with Brown Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-04, 1st Floor, SSN Room 114	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-225F	12" x 12" White with Brown Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-04, 1st Floor, Staff Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-225G	12" x 12" White with Brown Streaked Vinyl Floor Tile/Vinyl Floor Mastic	B-04, 1st Floor, Exam 5	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-226A	12" x 12" Tan with Brown and White Stripes Resilient Floor Tile/Resilient Floor Mastic	B-04, 1st Floor, Entry	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-226B	12" x 12" Tan with Brown and White Stripes Resilient Floor Tile/Resilient Floor Mastic	B-04, 1st Floor, Entry	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-226C	12" x 12" Tan with Brown and White Stripes Resilient Floor Tile/Resilient Floor Mastic	B-04, 1st Floor, Prisoner Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-227A	12" x 12" Orange Resilient Floor Tile/Resilient Floor Mastic	B-04, 1st Floor, Exam 13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-227B	12" x 12" Orange Resilient Floor Tile/Resilient Floor Mastic	B-04, 1st Floor, Exam 13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-227C	12" x 12" Orange Resilient Floor Tile/Resilient Floor Mastic	B-04, 1st Floor, Exam 13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-228A	Tan Vinyl Sheeting	B-04, 1st Floor, Staff Restroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-228B	Tan Vinyl Sheeting	B-04, 1st Floor, Exam 10	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-228C	Tan Vinyl Sheeting	B-04, 1st Floor, Restroom 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-229A	Tan Speckled Vinyl Sheeting	B-04, 1st Floor, Employee Health	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-229B	Tan Speckled Vinyl Sheeting	B-04, 1st Floor, Triage 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-229C	Tan Speckled Vinyl Sheeting	B-04, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-230A	4" Black Cove Base/Cove Base Mastic	B-04, 1st Floor, East Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-230B	4" Black Cove Base/Cove Base Mastic	B-04, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-230C	4" Black Cove Base/Cove Base Mastic	B-04, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-231A	4" Light Brown Cove Base/Cove Base Mastic	B-04, 1st Floor, Comm Rm 110	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-231B	4" Light Brown Cove Base/Cove Base Mastic	B-04, 1st Floor, Exam 14	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-231C	4" Light Brown Cove Base/Cove Base Mastic	B-04, 1st Floor, Spec. 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-232A	4" Brown Cove Base/Cove Base Mastic	B-04, 1st Floor, Equipment Supply	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-232B	4" Brown Cove Base/Cove Base Mastic	B-04, 1st Floor, Equipment Supply	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-232C	4" Brown Cove Base/Cove Base Mastic	B-04, 1st Floor, Equipment Supply	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-233A	4" Light Gray Cove Base/Cove Base Mastic	B-04, 1st Floor, Exam 13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-233B	4" Light Gray Cove Base/Cove Base Mastic	B-04, 1st Floor, Exam 13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-233C	4" Light Gray Cove Base/Cove Base Mastic	B-04, 1st Floor, Exam 13	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-234A	6" Brown Cove Base/Cove Base Mastic	B-04, 1st Floor, Entry	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-234B	6" Brown Cove Base/Cove Base Mastic	B-04, 1st Floor, Entry	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-234C	6" Brown Cove Base/Cove Base Mastic	B-04, 1st Floor, Prisoner Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-235A	6" Light Gray Cove Base/Cove Base Mastic	B-04, 1st Floor, Staff Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-235B	6" Light Gray Cove Base/Cove Base Mastic	B-04, 1st Floor, Staff Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-235C	6" Light Gray Cove Base/Cove Base Mastic	B-04, 1st Floor, Staff Lounge	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-236A	Drywall with Joint Compound	B-04, 1st Floor, Supply Room 108	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-236B	Drywall with Joint Compound	B-04, 1st Floor, Observation Room 102	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-236C	Drywall with Joint Compound	B-04, 1st Floor, 118	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-236D	Drywall with Joint Compound	B-04, 1st Floor, Nurse's Station	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-236E	Drywall with Joint Compound	B-04, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-236F	Drywall with Joint Compound	B-04, 1st Floor, Exam 10	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-236G	Drywall with Joint Compound	B-04, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-237A	2' x 4' White Fissured Ceiling Tile	B-04, 1st Floor, Supply Room 108	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-237B	2' x 4' White Fissured Ceiling Tile	B-04, 1st Floor, Observation Room 102	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-237C	2' x 4' White Fissured Ceiling Tile	B-04, 1st Floor, 118	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-237D	2' x 4' White Fissured Ceiling Tile	B-04, 1st Floor, Nurse's Station	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-237E	2' x 4' White Fissured Ceiling Tile	B-04, 1st Floor, Waiting Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-237F	2' x 4' White Fissured Ceiling Tile	B-04, 1st Floor, Exam 10	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-237G	2' x 4' White Fissured Ceiling Tile	B-04, 1st Floor, West Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-238A	Foil HVAC Insulation	B-04, 1st Floor, Supply Room 108	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-238B	Foil HVAC Insulation	B-04, 1st Floor, Exam 5	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-238C	Foil HVAC Insulation	B-04, 1st Floor, Nurse's Station	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-239A	Rolled Roof	B-04, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-239B	Rolled Roof	B-04, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-239C	Rolled Roof	B-04, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-239D	Rolled Roof	B-04, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-239E	Rolled Roof	B-04, Exterior, Roof	Positive	Multilayered black fibrous asphaltic material with granules Chrysotile - <1% Point Count - <0.1%	Misc.	Non-Friable	Good	Low	7,200 SF
211061-A-239F	Rolled Roof	B-04, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-239G	Rolled Roof	B-04, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-240A	Black Penetration Mastic	B-04, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 3%	Surfacing	Non-Friable	Good	Low	10 SF
211061-A-240B	Black Penetration Mastic	B-04, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-240C	Black Penetration Mastic	B-04, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-241A	12" x 12" Tan with Brown and White Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Kitchen	Positive	Black Asphaltic Material Chrysotile - 2%	Misc.	Non-Friable	Good	High	400 SF
211061-A-241B	12" x 12" Tan with Brown and White Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Kitchen	Positive	Black Asphaltic Material Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 241A
211061-A-241C	12" x 12" Tan with Brown and White Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Restroom	Positive	Black Asphaltic Material Chrysotile - 2%	Misc.	Non-Friable	Good	High	See 241A
211061-A-242A	Carpet Glue	B-11, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-242B	Carpet Glue	B-11, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-242C	Carpet Glue	B-11, 1st Floor, Administration	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-242D	Carpet Glue	B-11, 1st Floor, Hallway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-242E	Carpet Glue	B-11, 1st Floor, Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-243A	12" x 12" Tan with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Weight Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-243B	12" x 12" Tan with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Weight Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-243C	12" x 12" Tan with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic	B-11, 1st Floor, Weight Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-244A	Concrete	B-11, 1st Floor, Work Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-244B	Concrete	B-11, 1st Floor, Work Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-244C	Concrete	B-11, 1st Floor, Work Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-245A	6" Light Gray Cove Base/Cove Base Mastic	B-11, 1st Floor, Kitchen 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-245B	6" Light Gray Cove Base/Cove Base Mastic	B-11, 1st Floor, Kitchen 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-245C	6" Light Gray Cove Base/Cove Base Mastic	B-11, 1st Floor, Entry	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-246A	4" Light Brown Cove Base/Cove Base Mastic	B-11, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-246B	4" Light Brown Cove Base/Cove Base Mastic	B-11, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-246C	4" Light Brown Cove Base/Cove Base Mastic	B-11, 1st Floor, Weight Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-247A	4" Dark Brown Cove Base/Cove Base Mastic	B-11, 1st Floor, Restroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-247B	4" Dark Brown Cove Base/Cove Base Mastic	B-11, 1st Floor, Restroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-247C	4" Dark Brown Cove Base/Cove Base Mastic	B-11, 1st Floor, Restroom	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-248A	4" Light Gray Cove Base/Cove Base Mastic	B-11, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-248B	4" Light Gray Cove Base/Cove Base Mastic	B-11, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-248C	4" Light Gray Cove Base/Cove Base Mastic	B-11, 1st Floor, Entry	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-249A	Unfinished Drywall	B-11, 1st Floor, Kitchen 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-249B	Unfinished Drywall	B-11, 1st Floor, Work Area	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-249C	Unfinished Drywall	B-11, 1st Floor, Storage	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-250A	Drywall with Joint Compound	B-11, 1st Floor, Hallway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-250B	Drywall with Joint Compound	B-11, 1st Floor, Weight Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-250C	Drywall with Joint Compound	B-11, 1st Floor, Entry	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-250D	Drywall with Joint Compound	B-11, 1st Floor, Office 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-250E	Drywall with Joint Compound	B-11, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-251A	2' x 4' White Fissured Ceiling Tile	B-11, 1st Floor, Entry	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-251B	2' x 4' White Fissured Ceiling Tile	B-11, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-251C	2' x 4' White Fissured Ceiling Tile	B-11, 1st Floor, Administration	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-251D	2' x 4' White Fissured Ceiling Tile	B-11, 1st Floor, Hallway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-251E	2' x 4' White Fissured Ceiling Tile	B-11, 1st Floor, Office 4	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-252A	Plaster with Skim Coat	B-11, 1st Floor, Garage	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-252B	Plaster with Skim Coat	B-11, 1st Floor, Garage	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-252C	Plaster with Skim Coat	B-11, 1st Floor, Garage	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-253A	Concrete	B-11, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-253B	Concrete	B-11, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-253C	Concrete	B-11, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-254A	Stucco with Vapor Barrier	B-11, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-254B	Stucco with Vapor Barrier	B-11, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-254C	Stucco with Vapor Barrier	B-11, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-254D	Stucco with Vapor Barrier	B-11, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-254E	Stucco with Vapor Barrier	B-11, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-255A	Shingle Roof	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-255B	Shingle Roof	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-255C	Shingle Roof	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-256A	Foam Roof over Rolled Roof Core	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-256B	Foam Roof over Rolled Roof Core	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-256C	Foam Roof over Rolled Roof Core	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-257A	Penetration Mastic	B-11, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating and granules Chrysotile - 2%	Surfacing	Non-Friable	Good	Low	20 SF
211061-A-257B	Penetration Mastic	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-257C	Penetration Mastic	B-11, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 4%	Surfacing	Non-Friable	Good	Low	See 257A
211061-A-258A	White Sealant Tape	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-258B	White Sealant Tape	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-258C	White Sealant Tape	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A



<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-259A	HVAC Mastic	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-259B	HVAC Mastic	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-259C	HVAC Mastic	B-11, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-260A	White Stucco	B-04, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-260B	White Stucco	B-04, Exterior, Exterior A	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-260C	White Stucco	B-04, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-261A	Carpet Glue	B-06, 1st Floor, Office 11	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-261B	Carpet Glue	B-06, 1st Floor, Office 8	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-261C	Carpet Glue	B-06, 1st Floor, Office 5	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-261D	Carpet Glue	B-06, 1st Floor, File Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-261E	Carpet Glue	B-06, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-262A	Tan Vinyl Sheeting	B-06, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-262B	Tan Vinyl Sheeting	B-06, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-262C	Tan Vinyl Sheeting	B-06, 1st Floor, Restroom 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-263A	Speckled Vinyl Sheeting	B-06, 1st Floor, Break Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-263B	Speckled Vinyl Sheeting	B-06, 1st Floor, Break Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-263C	Speckled Vinyl Sheeting	B-06, 1st Floor, Break Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-264A	12" x 12" Brown with Dark Brown Resilient Floor Tile/Resilient Floor Mastic	B-06, 1st Floor, Water Heater Closet	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-264B	12" x 12" Brown with Dark Brown Resilient Floor Tile/Resilient Floor Mastic	B-06, 1st Floor, Water Heater Closet	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-264C	12" x 12" Brown with Dark Brown Resilient Floor Tile/Resilient Floor Mastic	B-06, 1st Floor, Water Heater Closet	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-265A	4" Black Cove Base/Cove Base Mastic	B-06, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-265B	4" Black Cove Base/Cove Base Mastic	B-06, 1st Floor, File Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-265C	4" Black Cove Base/Cove Base Mastic	B-06, 1st Floor, Storage	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-266A	4" Light Brown Cove Base/Cove Base Mastic	B-06, 1st Floor, Hallway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-266B	4" Light Brown Cove Base/Cove Base Mastic	B-06, 1st Floor, Corridor	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-266C	4" Light Brown Cove Base/Cove Base Mastic	B-06, 1st Floor, Hallway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-267A	4" Dark Brown Cove Base/Cove Base Mastic	B-06, 1st Floor, Restroom 1	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-267B	4" Dark Brown Cove Base/Cove Base Mastic	B-06, 1st Floor, Restroom 2	Negative	None Detected	N/A	N/A	N/A	N/A	N/A

<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-267C	4" Dark Brown Cove Base/Cove Base Mastic	B-06, 1st Floor, Water Heater Closet	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-268A	Drywall with Wallpaper	B-06, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-268B	Drywall with Wallpaper	B-06, 1st Floor, Office 11	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-268C	Drywall with Wallpaper	B-06, 1st Floor, Security	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-268D	Drywall with Wallpaper	B-06, 1st Floor, Reception	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-268E	Drywall with Wallpaper	B-06, 1st Floor, Hallway	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-269A	2' x 4' White Fissured/Pitted Ceiling Tile	B-06, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-269B	2' x 4' White Fissured/Pitted Ceiling Tile	B-06, 1st Floor, Office 9	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-269C	2' x 4' White Fissured/Pitted Ceiling Tile	B-06, 1st Floor, Office 3	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-269D	2' x 4' White Fissured/Pitted Ceiling Tile	B-06, 1st Floor, Reception	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-269E	2' x 4' White Fissured/Pitted Ceiling Tile	B-06, 1st Floor, File Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-270A	Foil HVAC TSI	B-06, 1st Floor, Conference Room	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-270B	Foil HVAC TSI	B-06, 1st Floor, Storage	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-270C	Foil HVAC TSI	B-06, 1st Floor, Office 9	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-271A	Stucco	B-06, Exterior, Exterior B	Negative	None Detected	N/A	N/A	N/A	N/A	N/A


<u>Sample Number</u>	<u>Material</u>	<u>Sample Locations</u>	<u>Pos/Neg</u>	<u>Asbestos Type - Percentage</u>	<u>Classification</u>	<u>Friability</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-A-271B	Stucco	B-06, Exterior, Exterior C	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-271C	Stucco	B-06, Exterior, Exterior D	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-272A	Rolled Roof	B-06, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-272B	Rolled Roof	B-06, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-272C	Rolled Roof	B-06, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-272D	Rolled Roof	B-06, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-272E	Rolled Roof	B-06, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-273A	Brown Penetration Mastic	B-06, Exterior, Roof	Negative	None Detected	N/A	N/A	N/A	N/A	N/A
211061-A-273B	Brown Penetration Mastic	B-06, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 2%	Surfacing	Non-Friable	Good	Low	10 SF
211061-A-273C	Brown Penetration Mastic	B-06, Exterior, Roof	Positive	Black Asphaltic Mastic with Coating Chrysotile - 2%	Surfacing	Non-Friable	Good	Low	See 273B

LEGEND: N/A Not Applicable

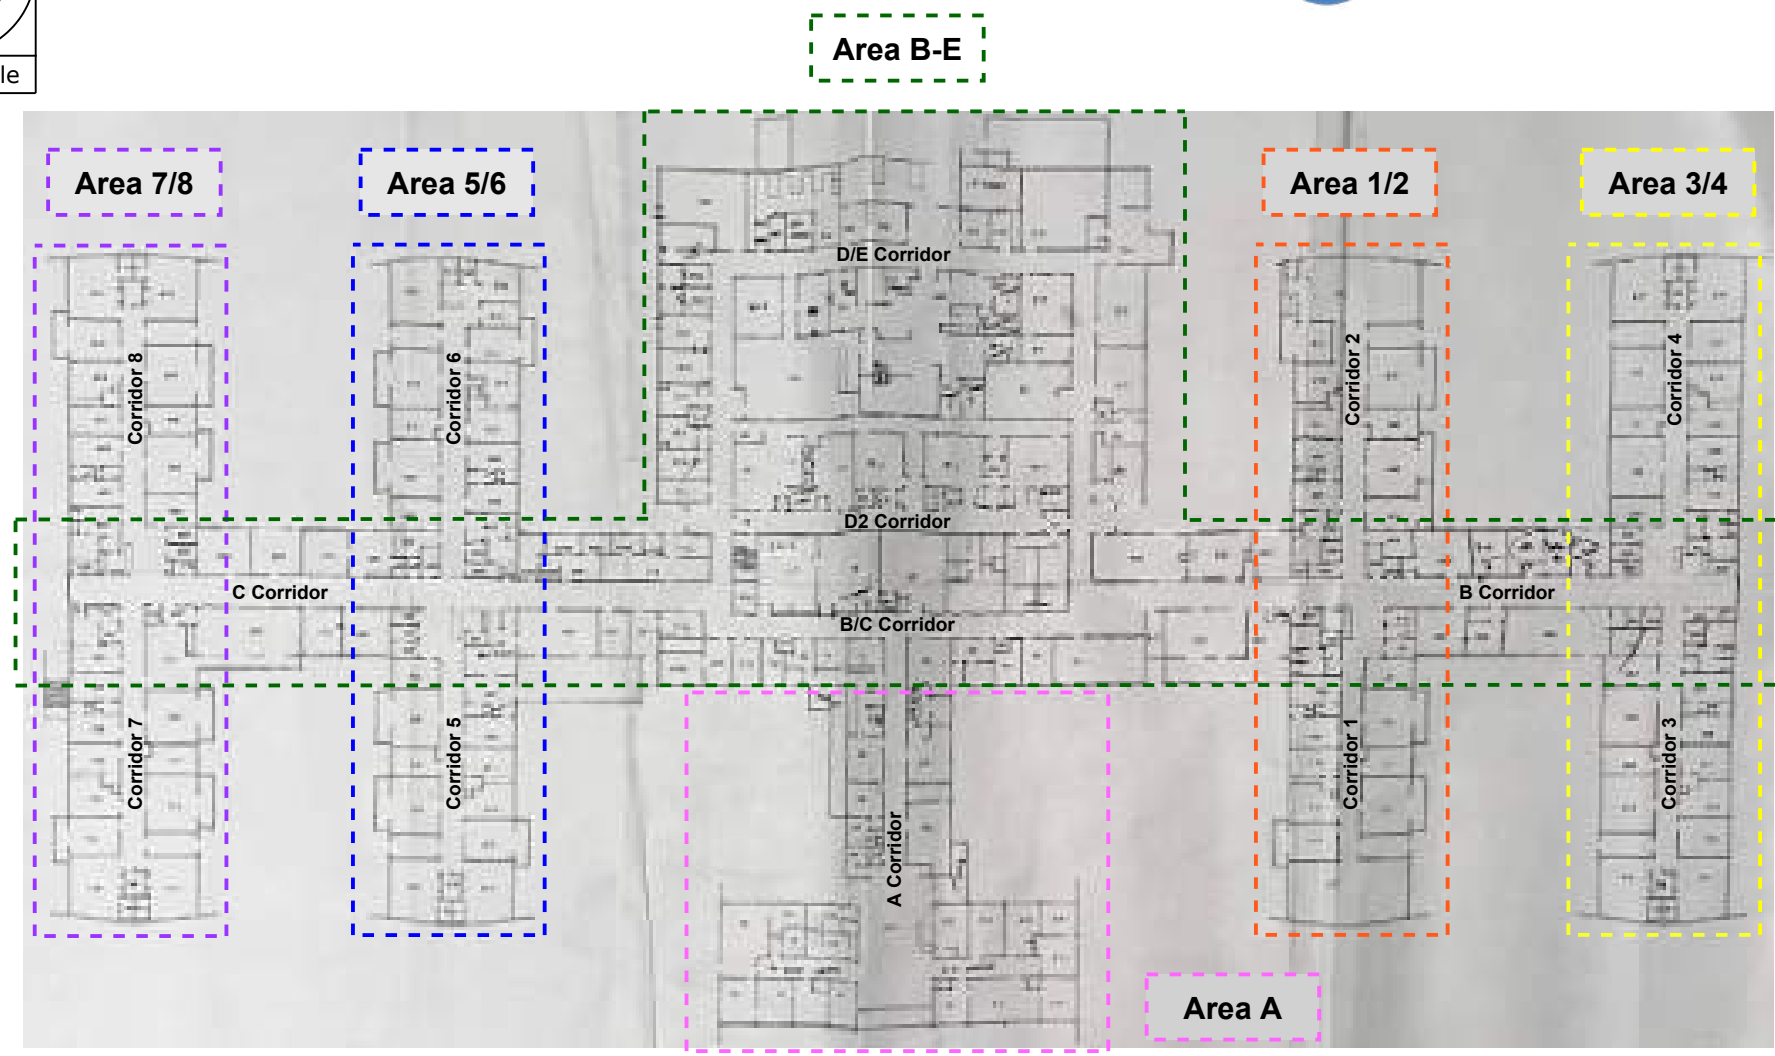

Overview of the Main Hospital,
1st Floor

Site Drawing - Asbestos - Page 1 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch-211061	County of Los Angeles, Department of Public Works

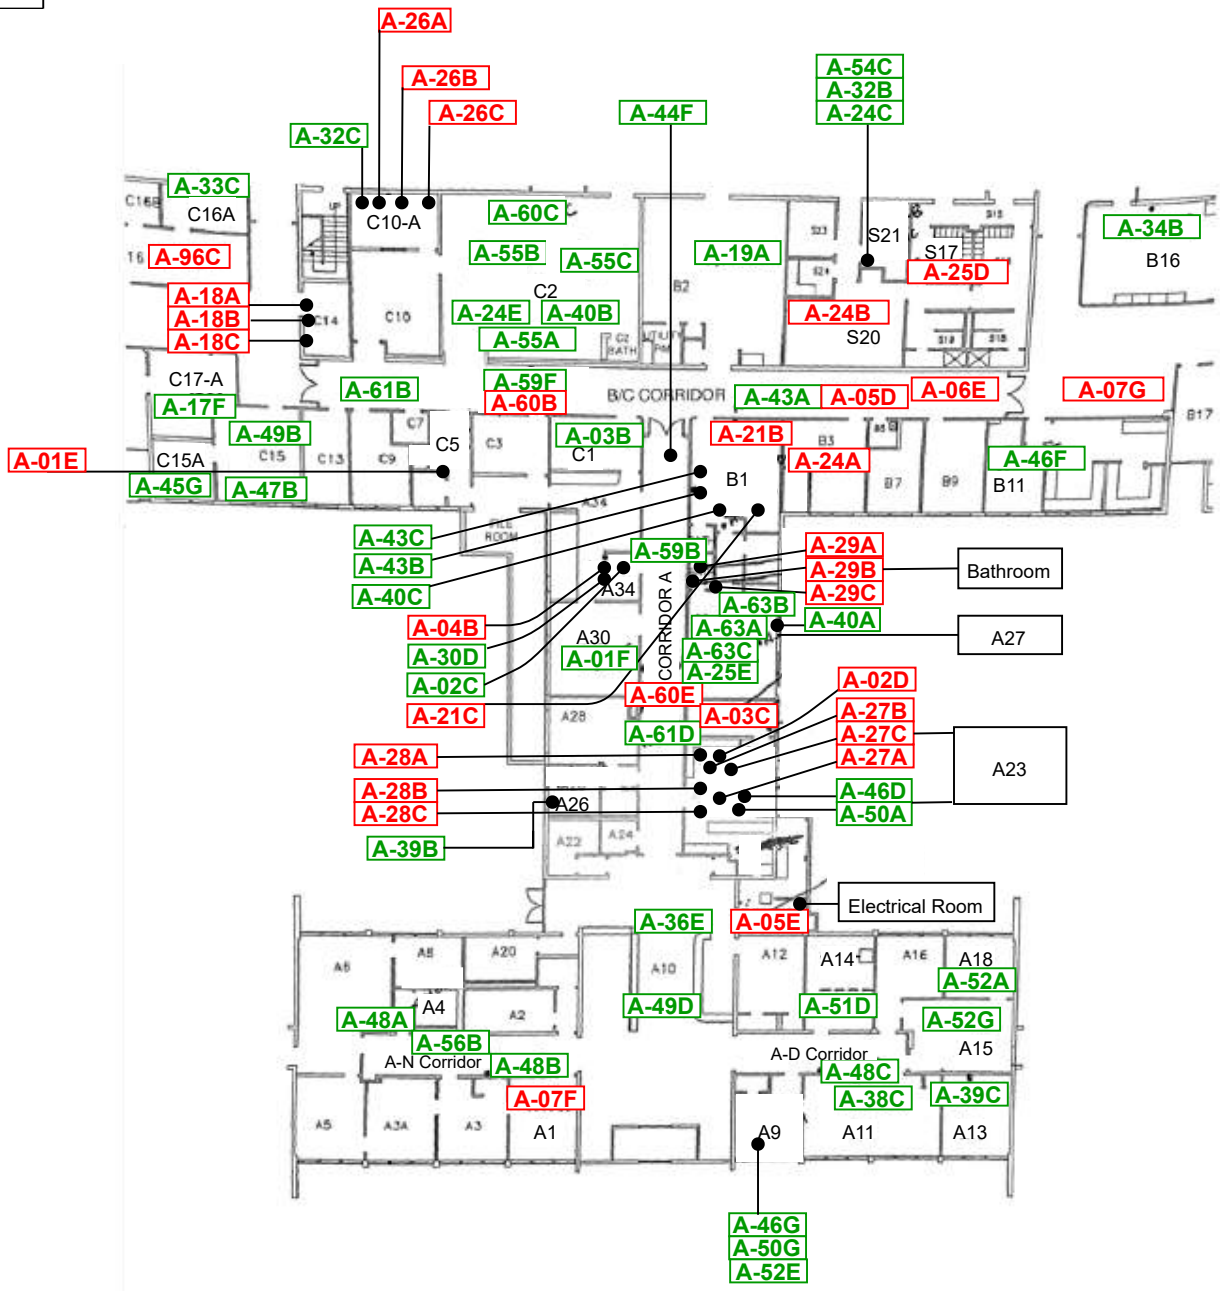

Main Hospital, 1st Floor

Site Drawing - Asbestos - Page 2 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**



Main Hospital, 1st Floor


Site Drawing - Asbestos - Page 3 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

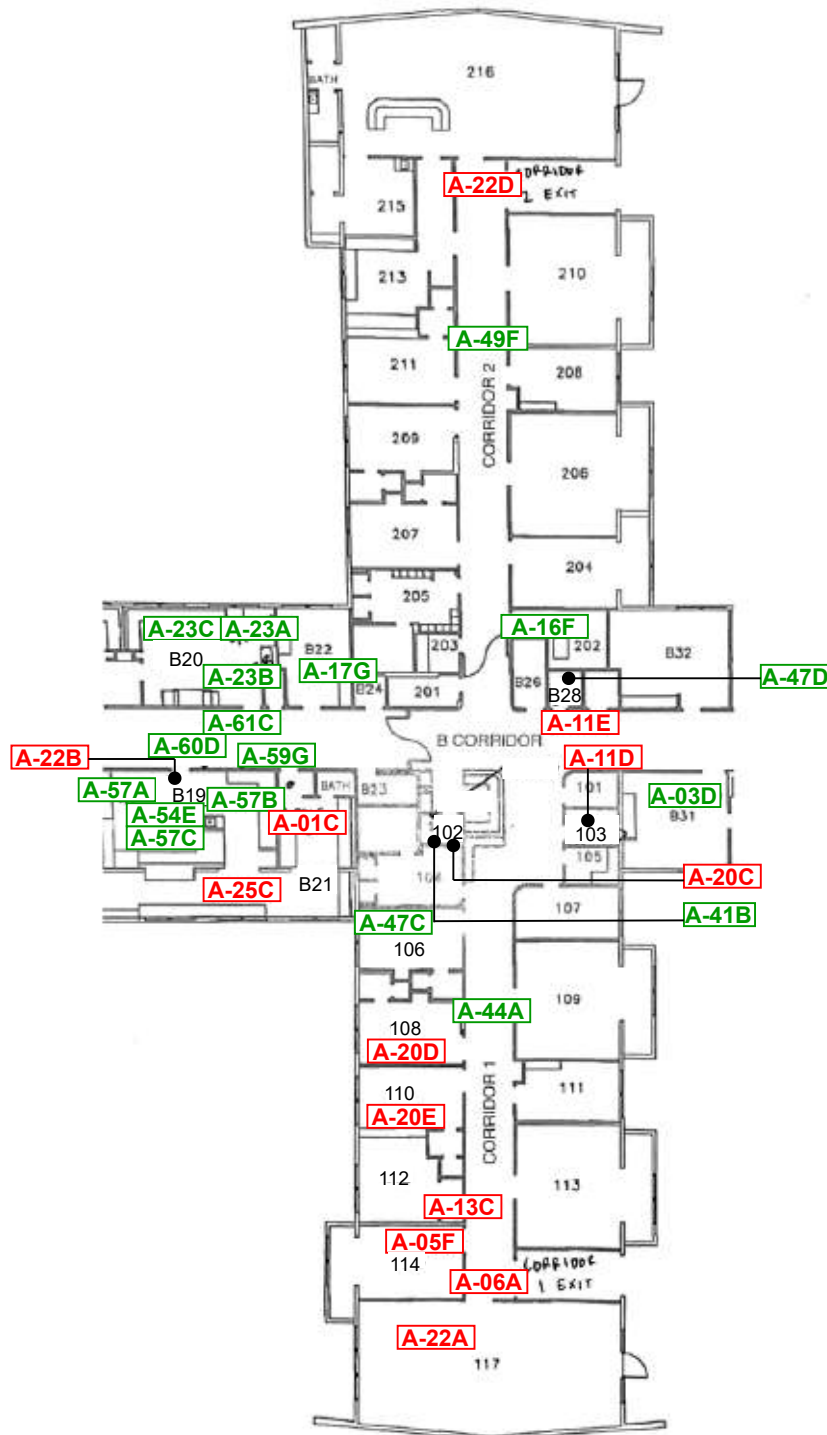

Main Hospital, 1st Floor

Site Drawing - Asbestos - Page 4 of 36


High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**

LEGEND:

A = Positive Asbestos Sample Locations
G = Negative Asbestos Sample Locations

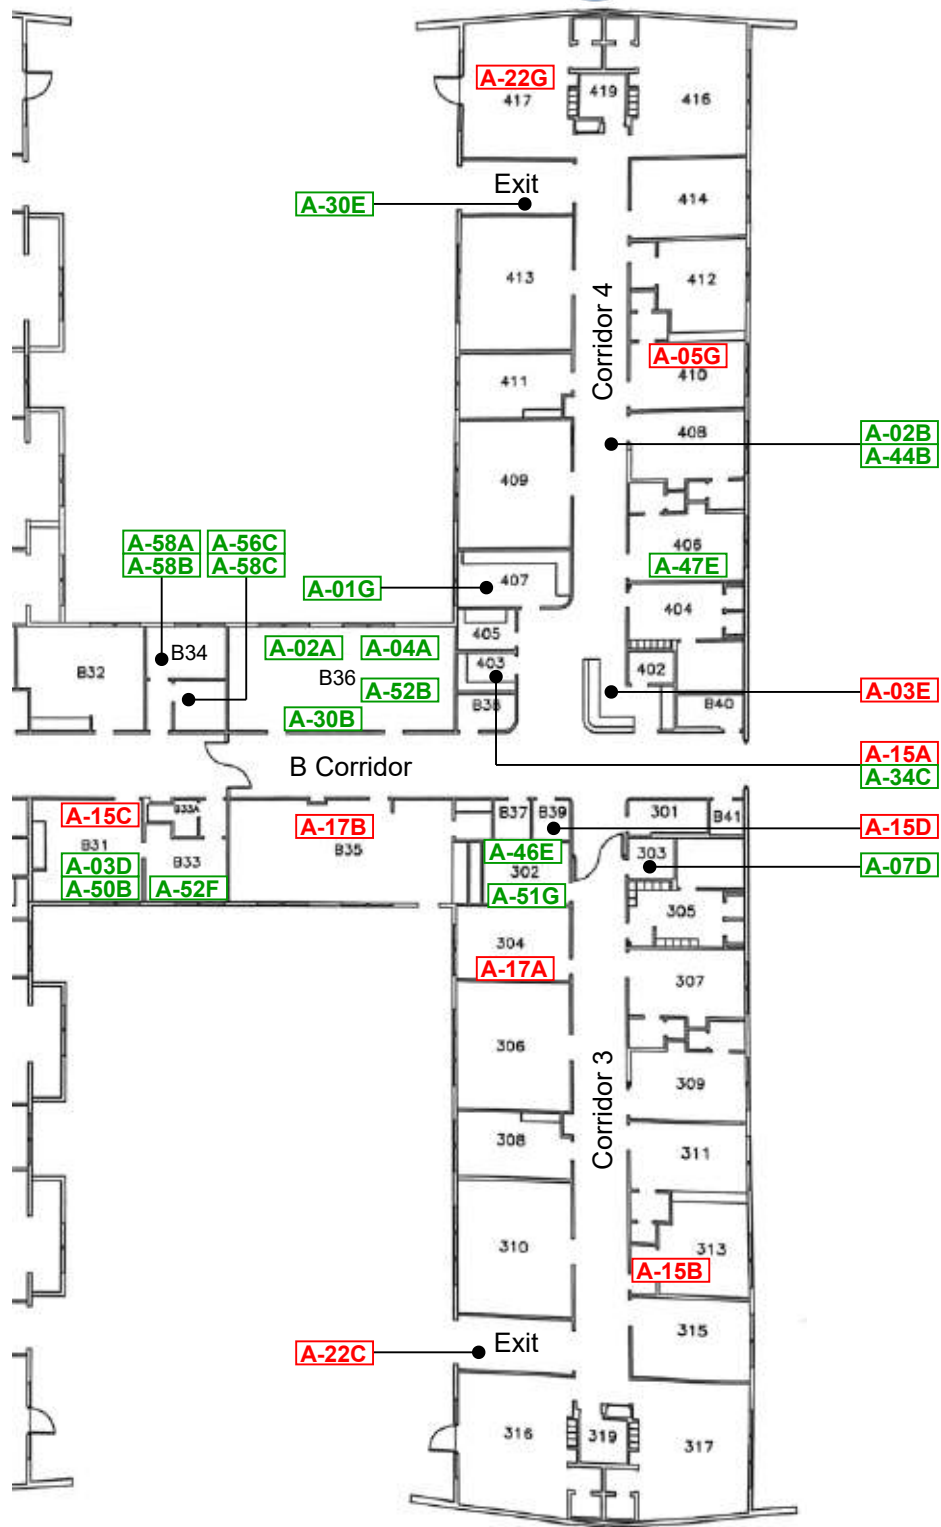

Main Hospital, 1st Floor


Site Drawing - Asbestos - Page 5 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

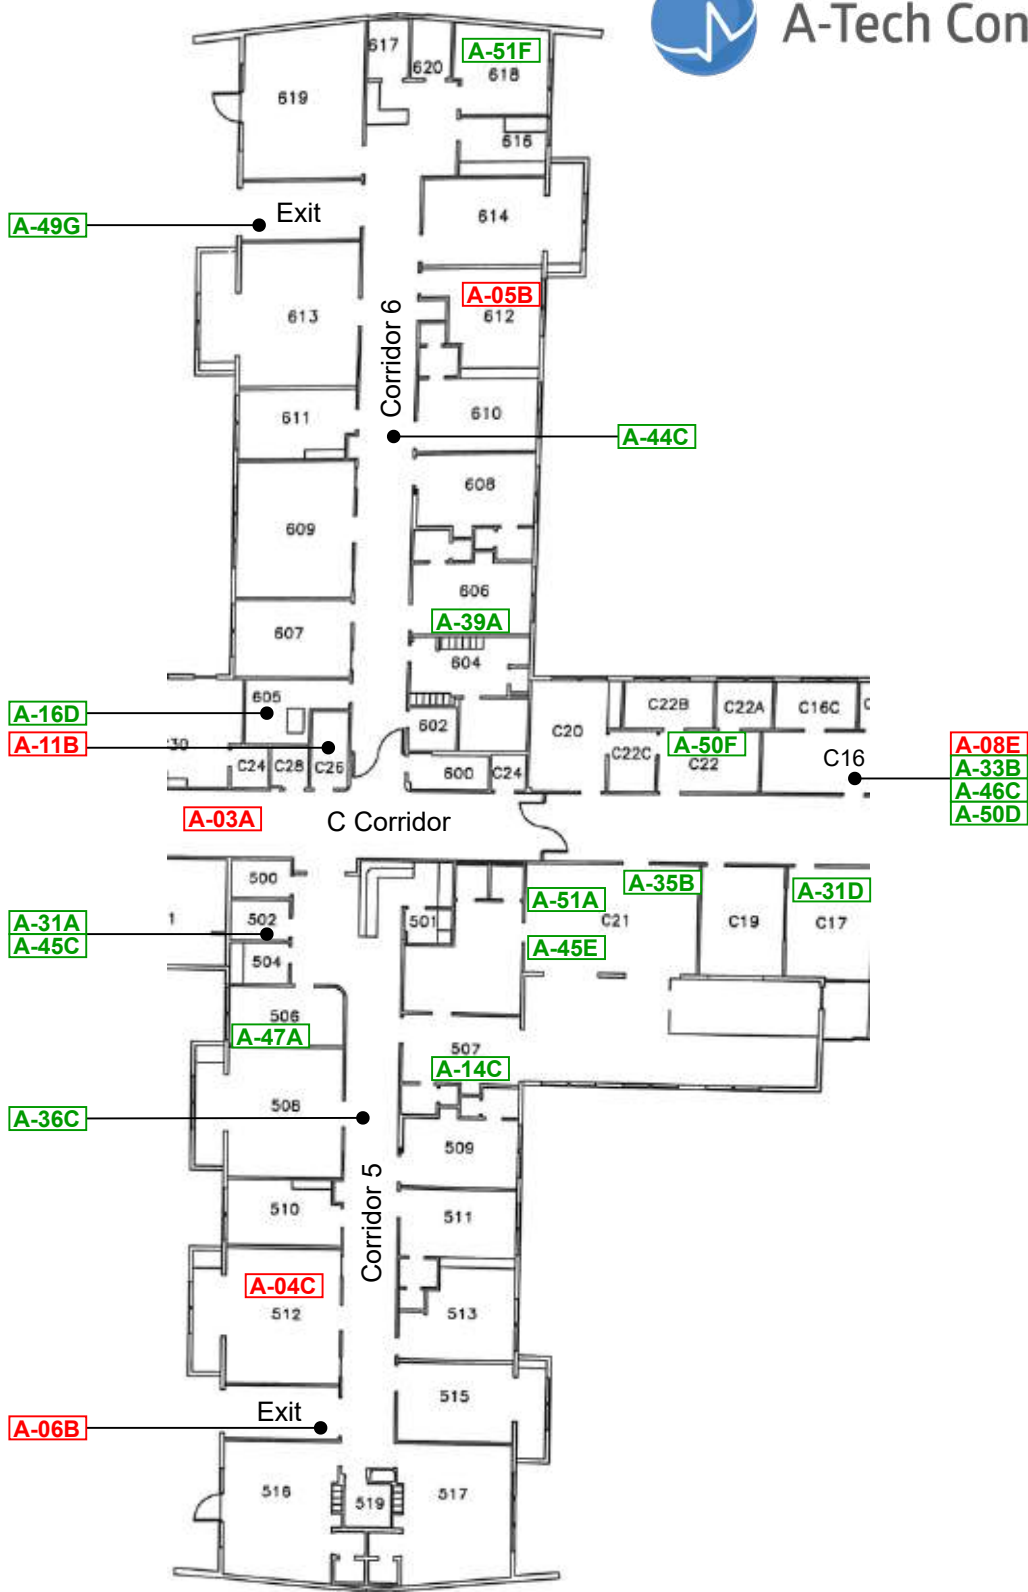

Main Hospital, 1st Floor


Site Drawing - Asbestos - Page 6 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

LEGEND:
A = Positive Asbestos Sample Locations
G = Negative Asbestos Sample Locations

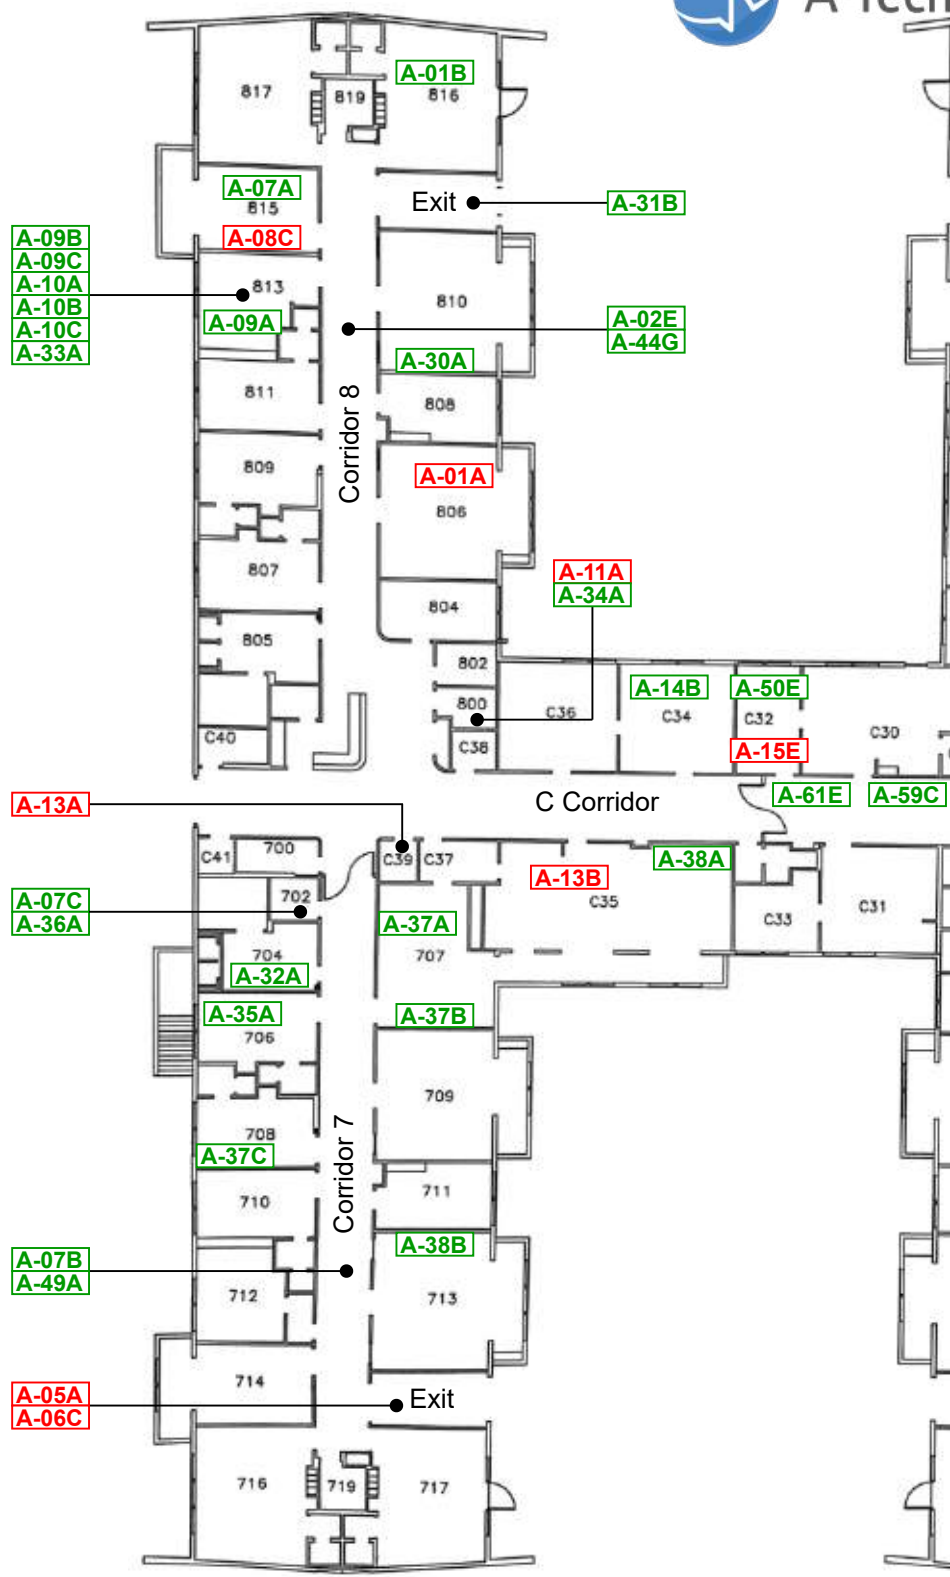

Main Hospital, 1st Floor



Site Drawing - Asbestos - Page 7 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

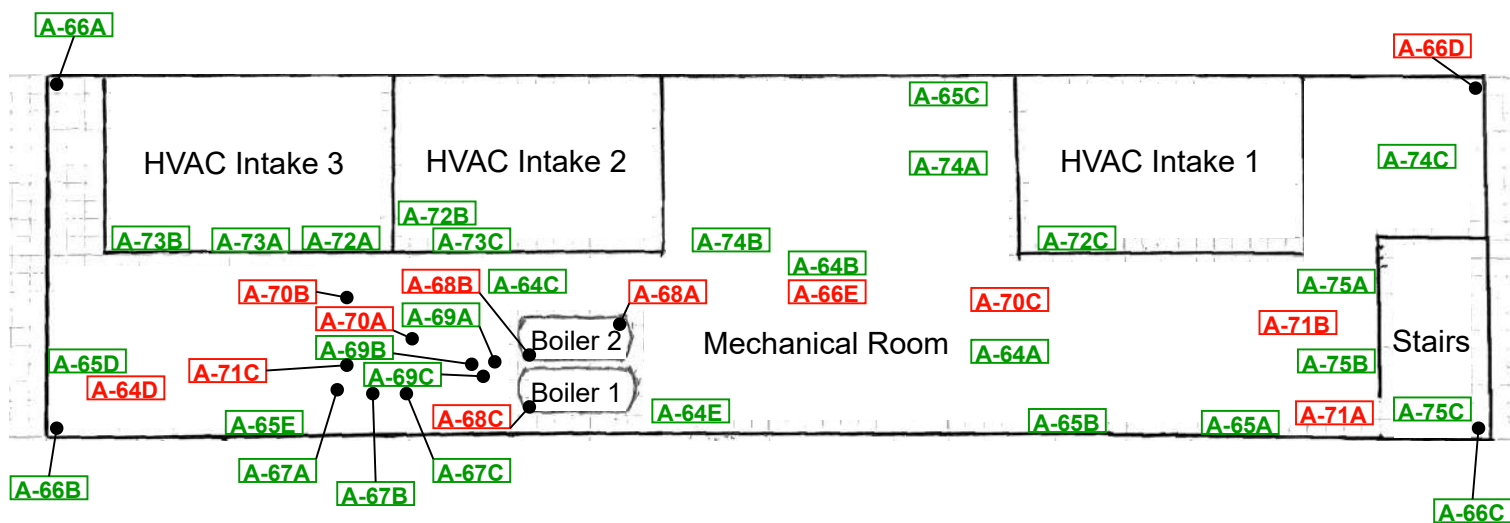

Main Hospital, 2nd Floor, Mechanical Room



Site Drawing - Asbestos - Page 8 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works


LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

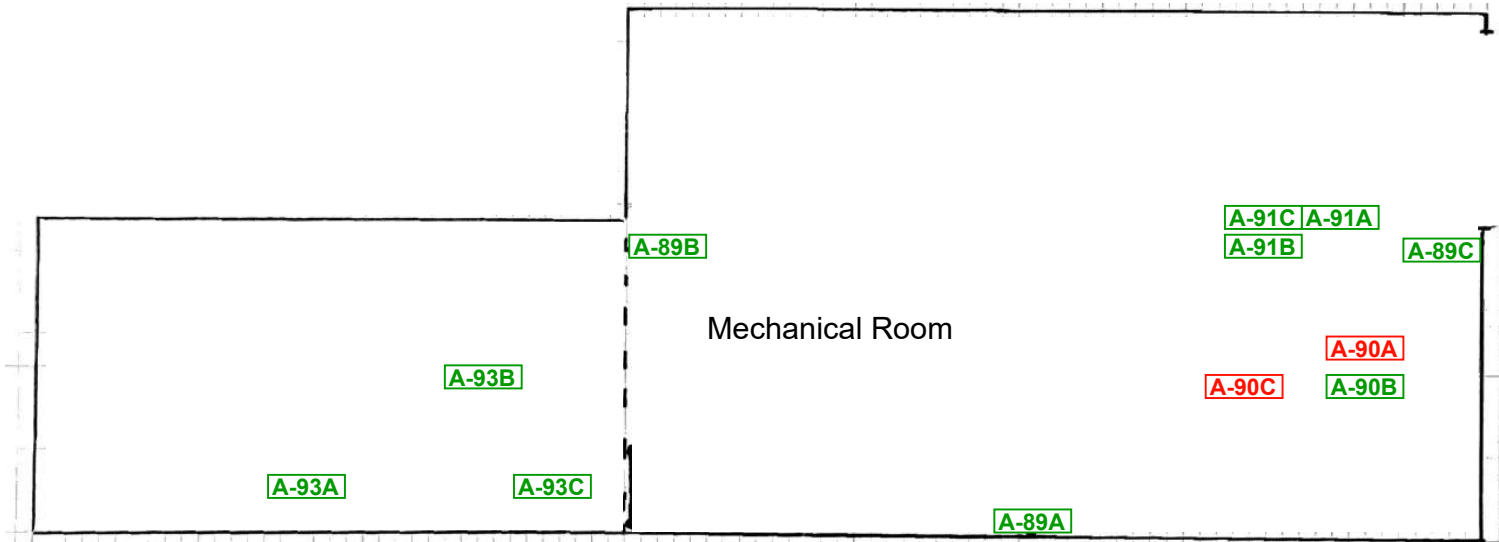

Main Hospital, 1st Floor, Mechanical Room

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations


Site Drawing - Asbestos - Page 9 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



Not to Scale




A-Tech Consulting, Inc.

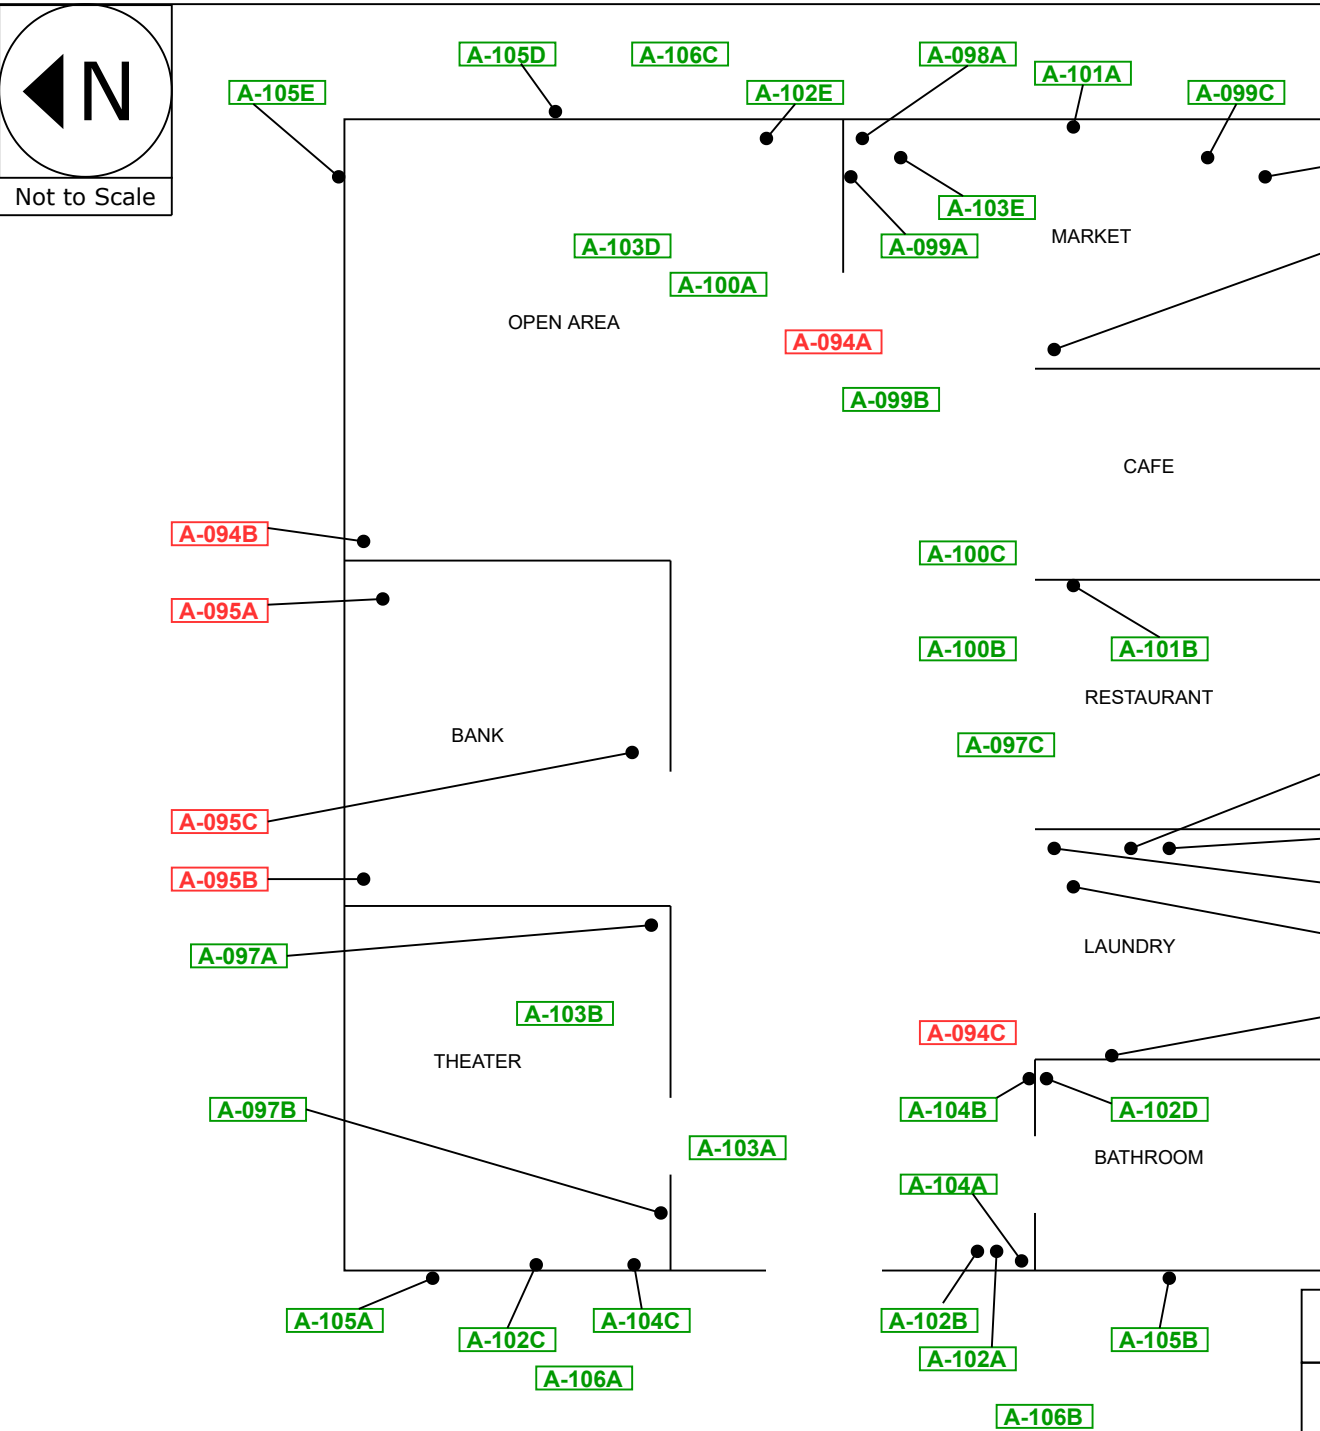

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

B-13, 1st Floor

Site Drawing - Asbestos - Page 10 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



Not to Scale




A-Tech Consulting, Inc.

C

B

D

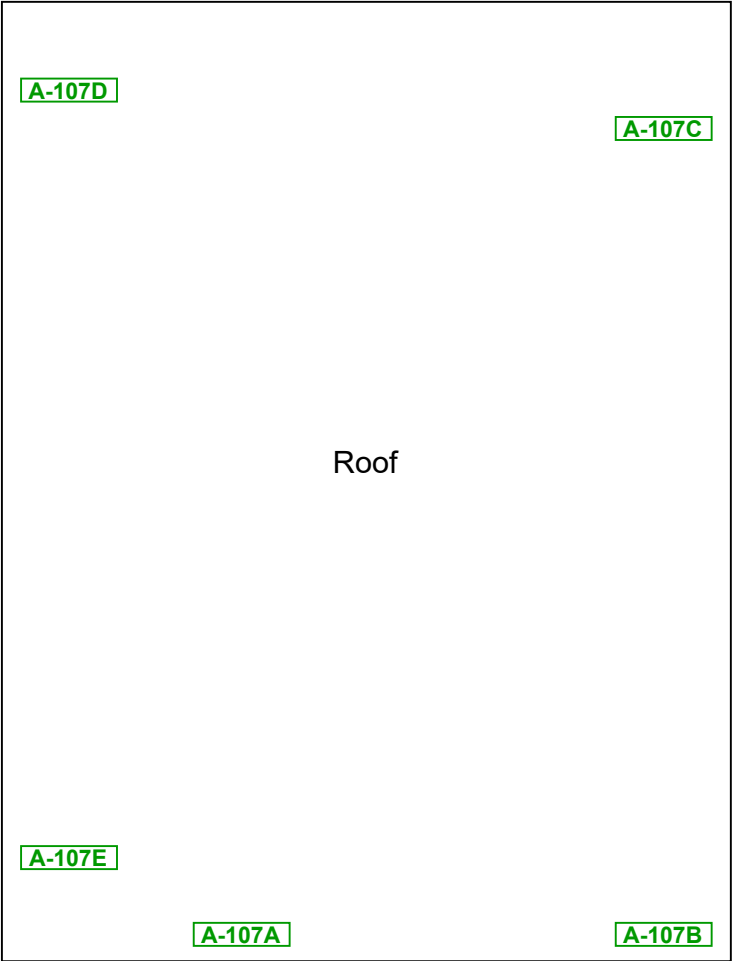


A

B-13, Exterior


LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

Site Drawing - Asbestos - Page 11 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works




**County of Los Angeles,
Department of Public Works**

LEGEND:
A = Positive Asbestos Sample Locations
G = Negative Asbestos Sample Locations



Not to Scale

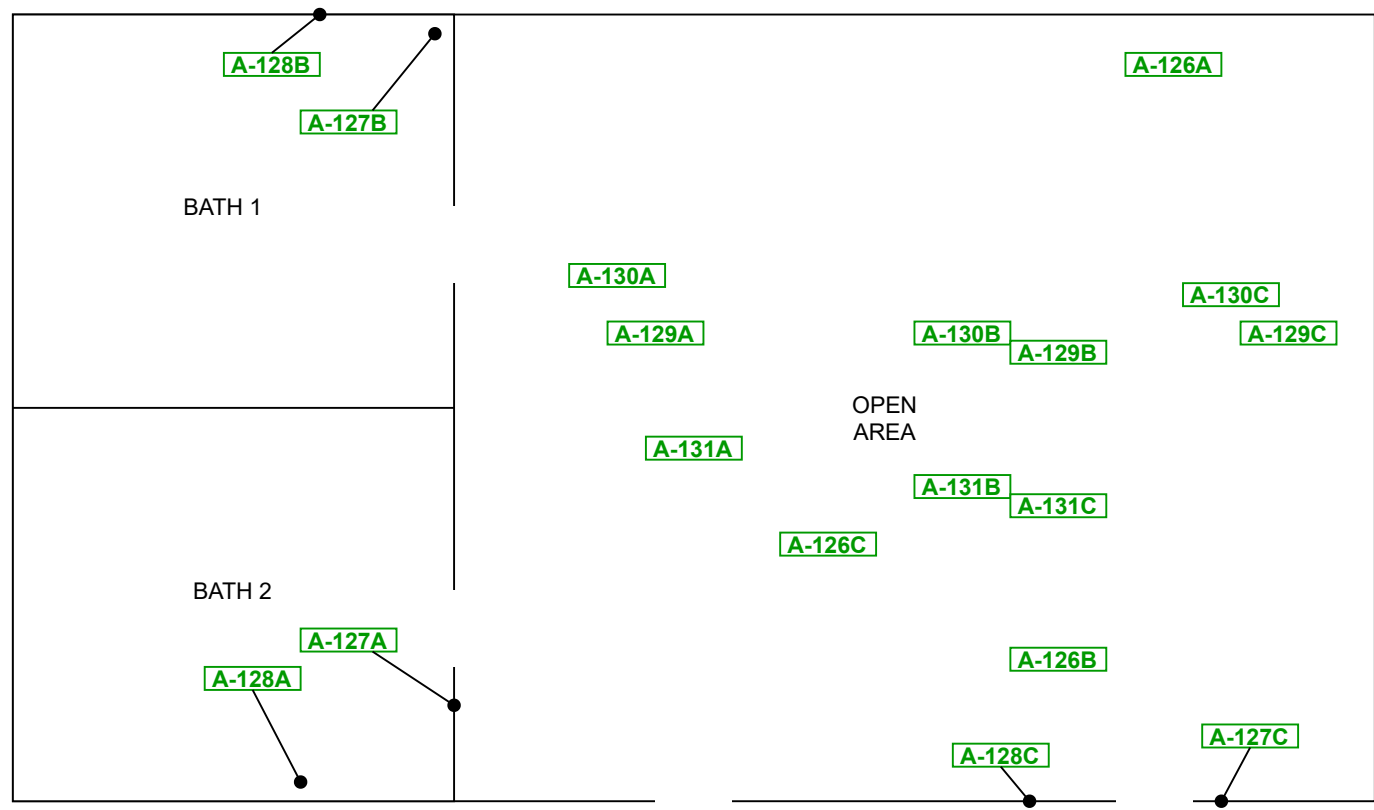

B-10, 1st Floor

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

Site Drawing - Asbestos - Page 13 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



C

A-134C

B

D

Roof

A-132A

A-132C

A-133B

A-132B

A-133C

A-133A

A-134B

A-134A

A

B-10, Exterior and Roof


Site Drawing - Asbestos - Page 14 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536


Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations



Not to Scale

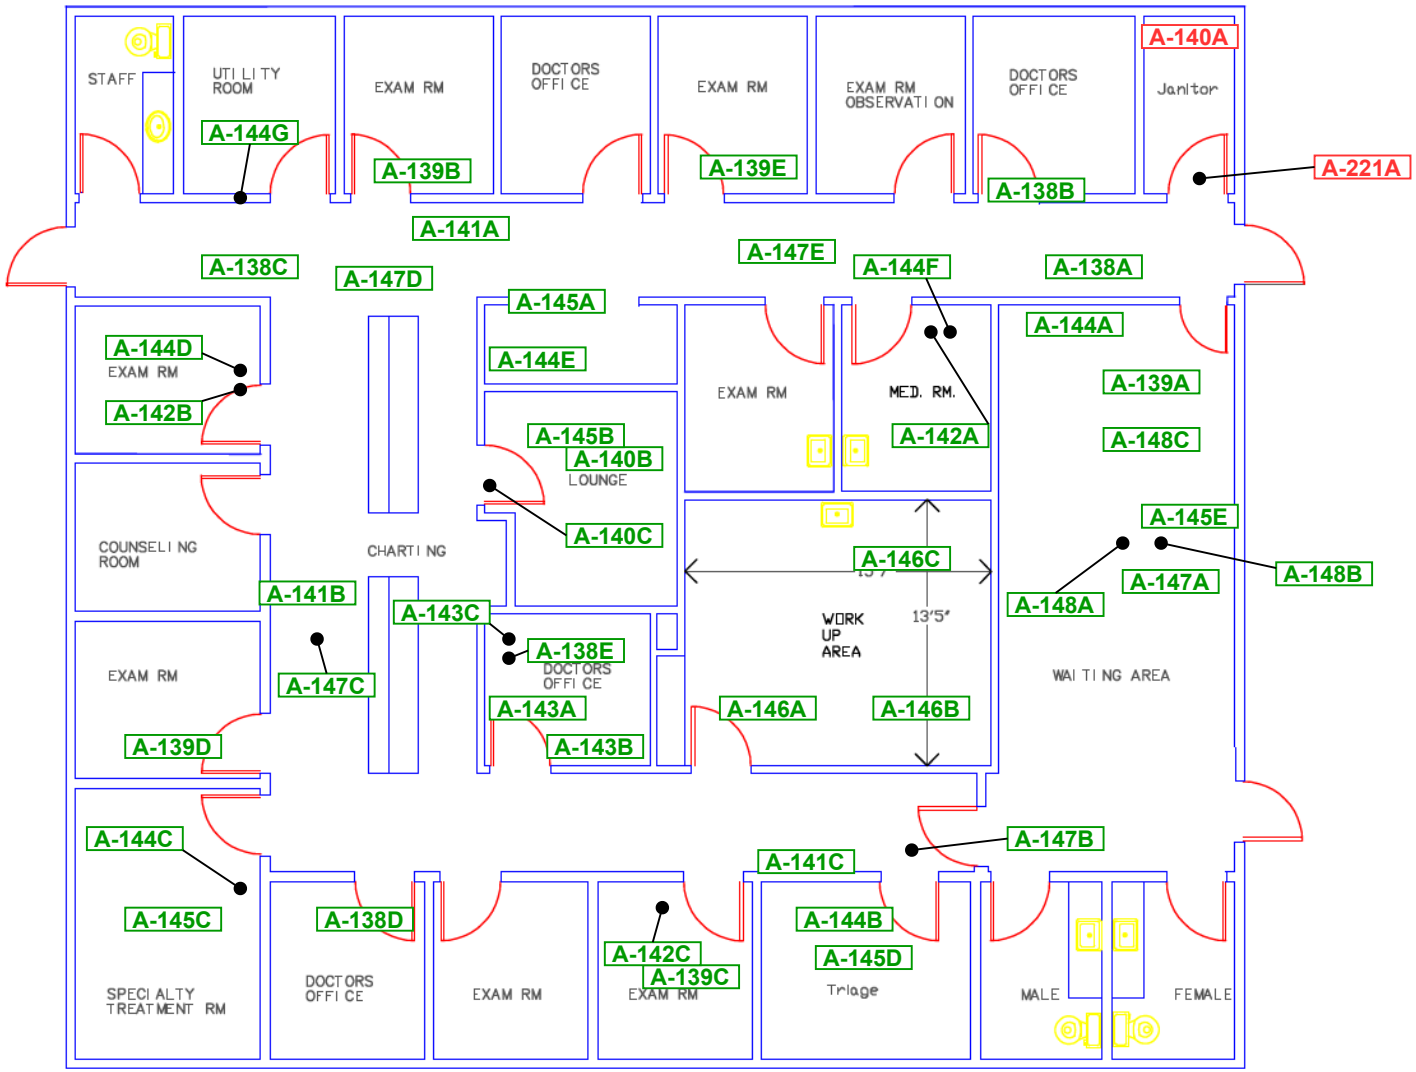

B-02, 1st Floor


Site Drawing - Asbestos - Page 15 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations



Not to Scale




A-Tech Consulting, Inc.

D

C

A

B

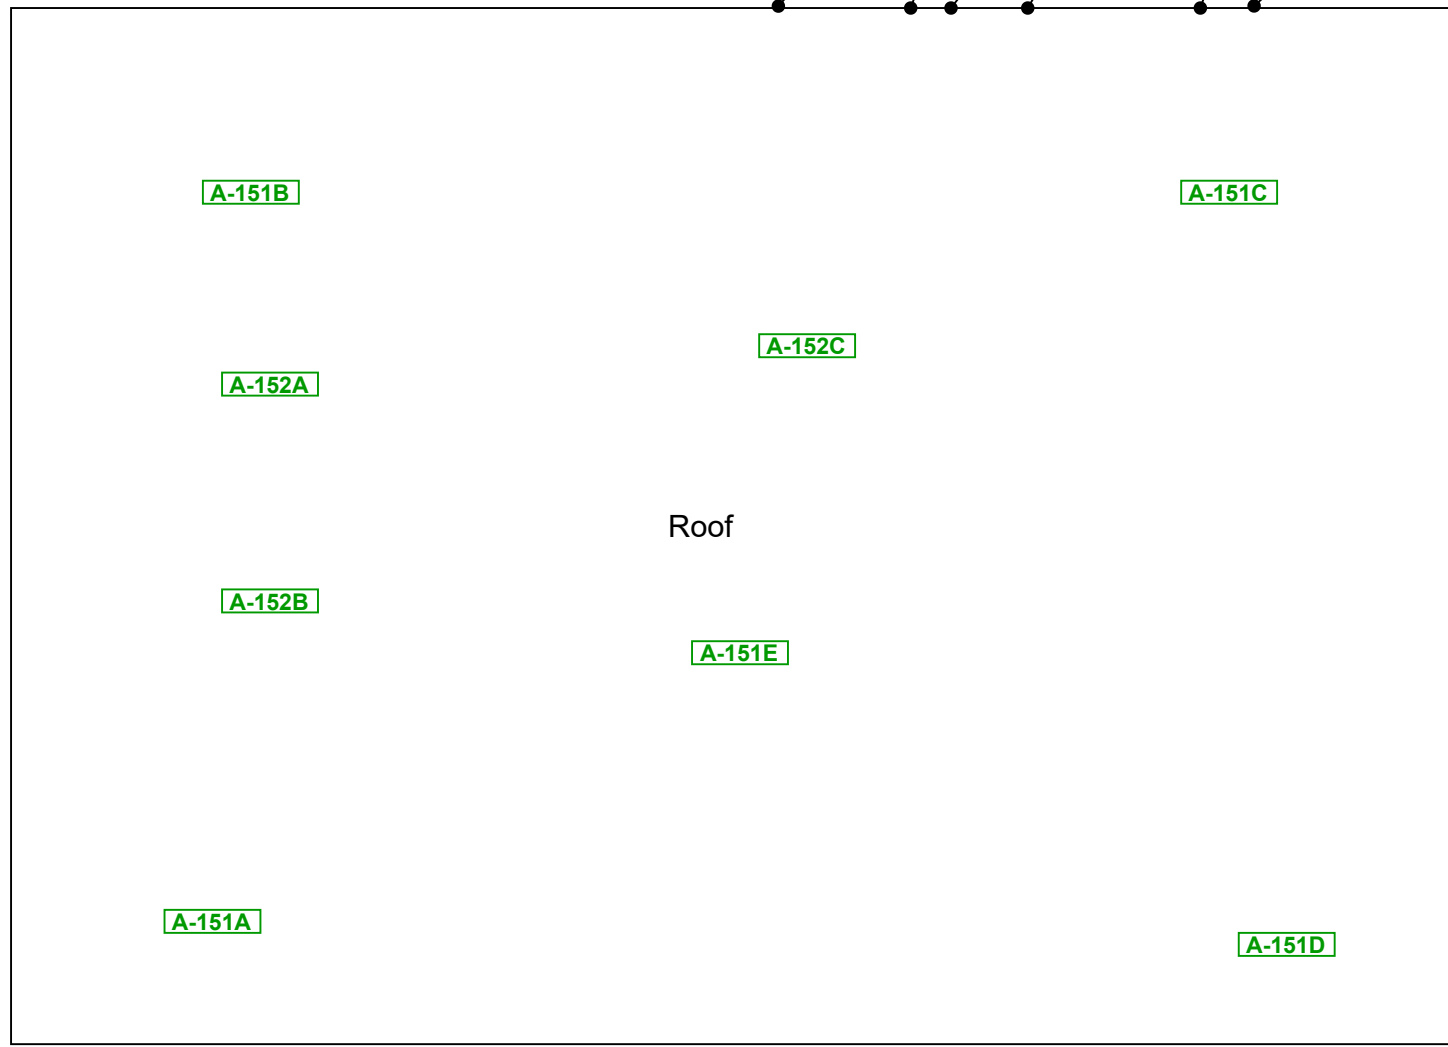

B-02, Exterior and Roof



Site Drawing - Asbestos - Page 16 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**



LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

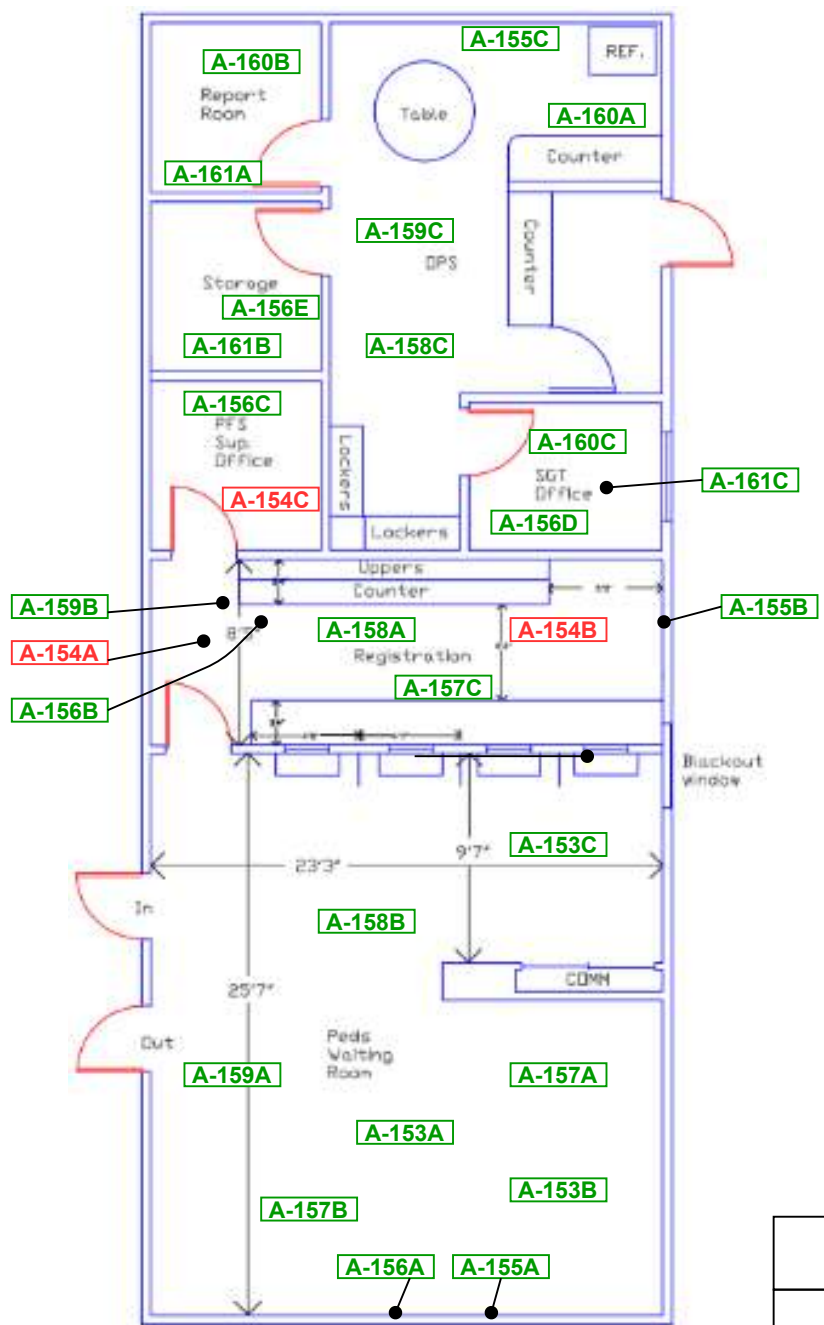

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

B-03, 1st Floor



Site Drawing - Asbestos - Page 17 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

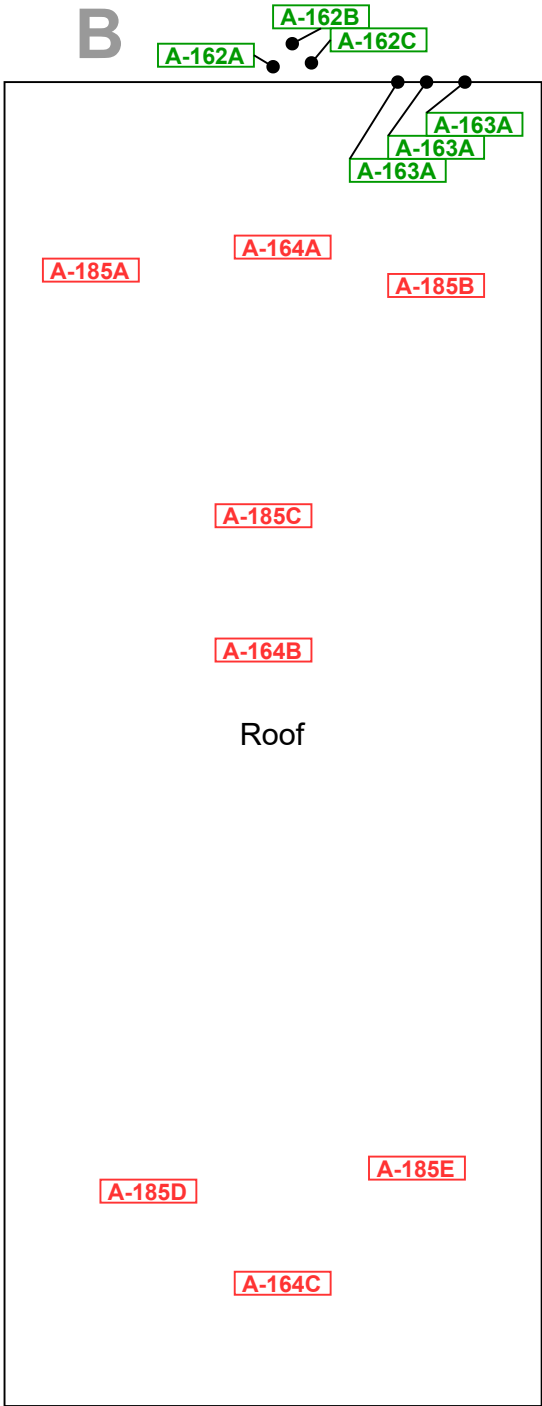

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

B-03, Exterior and Roof

Site Drawing - Asbestos - Page 18 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

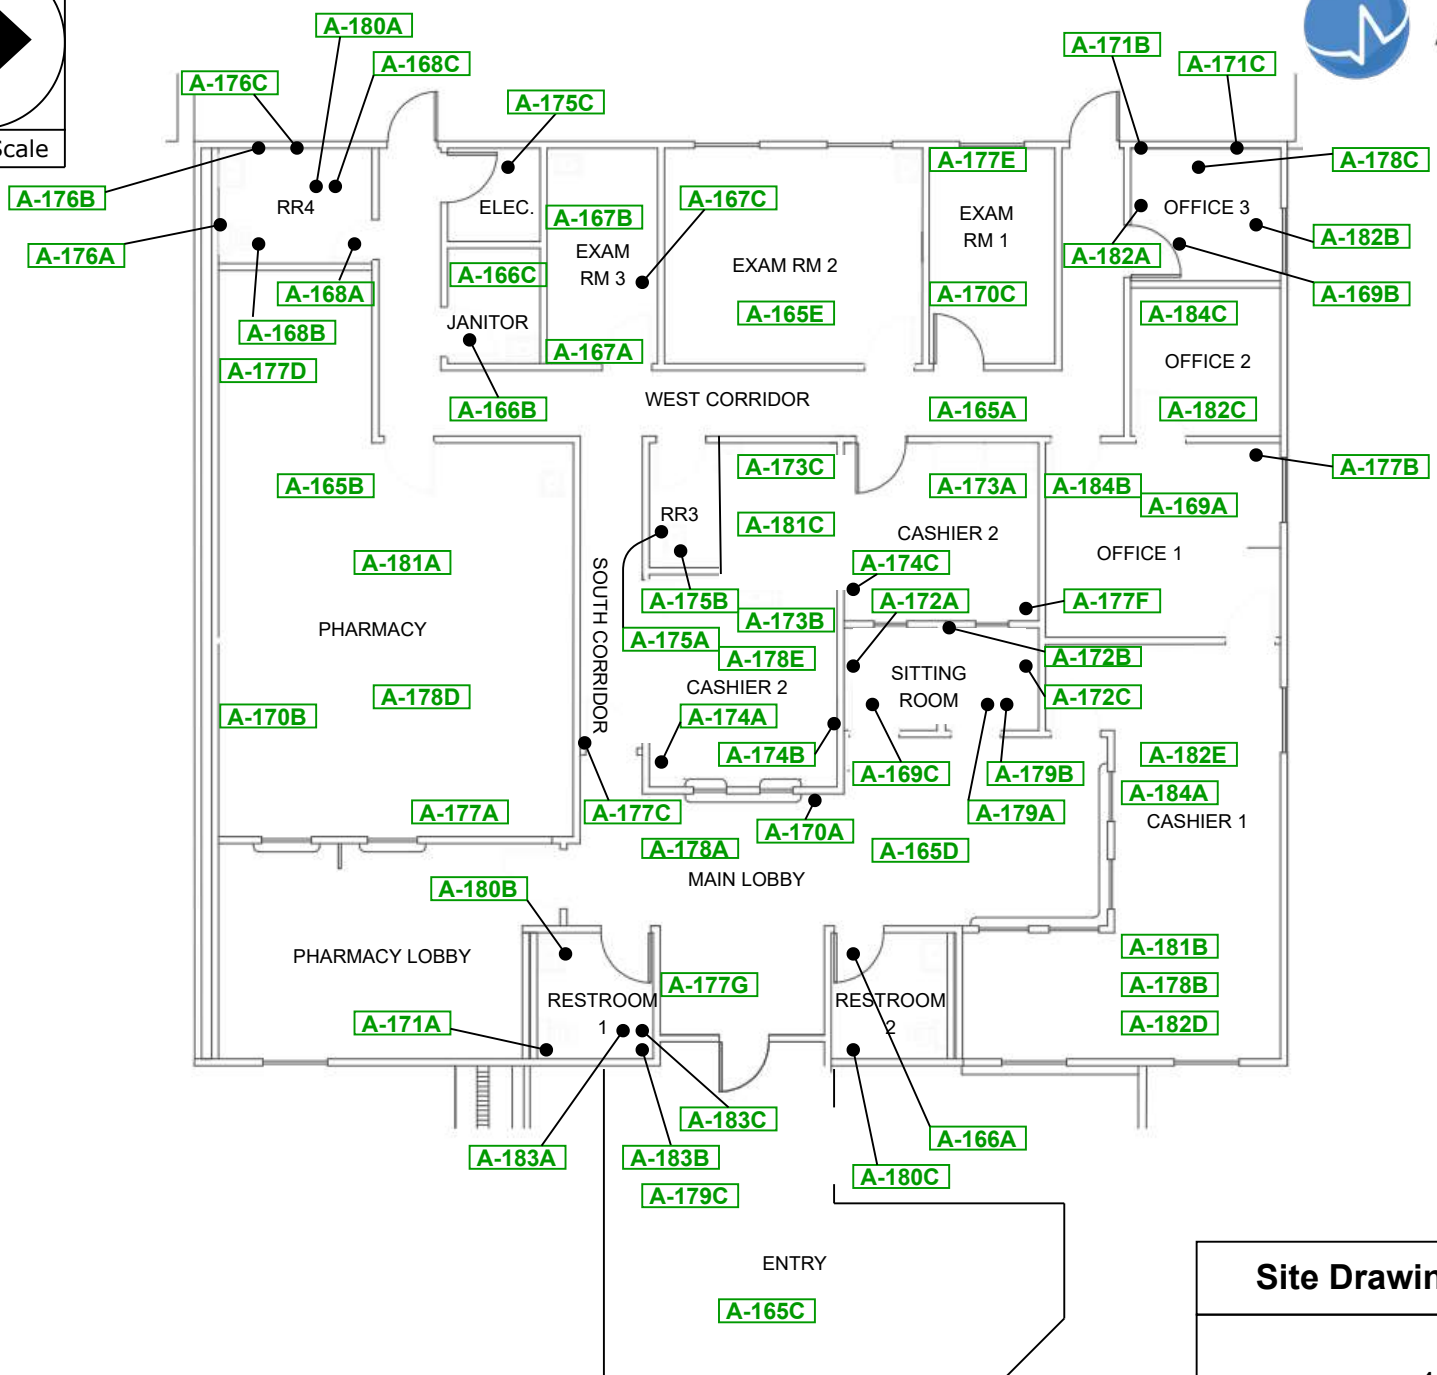


LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

B-05, 1st Floor

Site Drawing - Asbestos - Page 19 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

N▶

Not to Scale

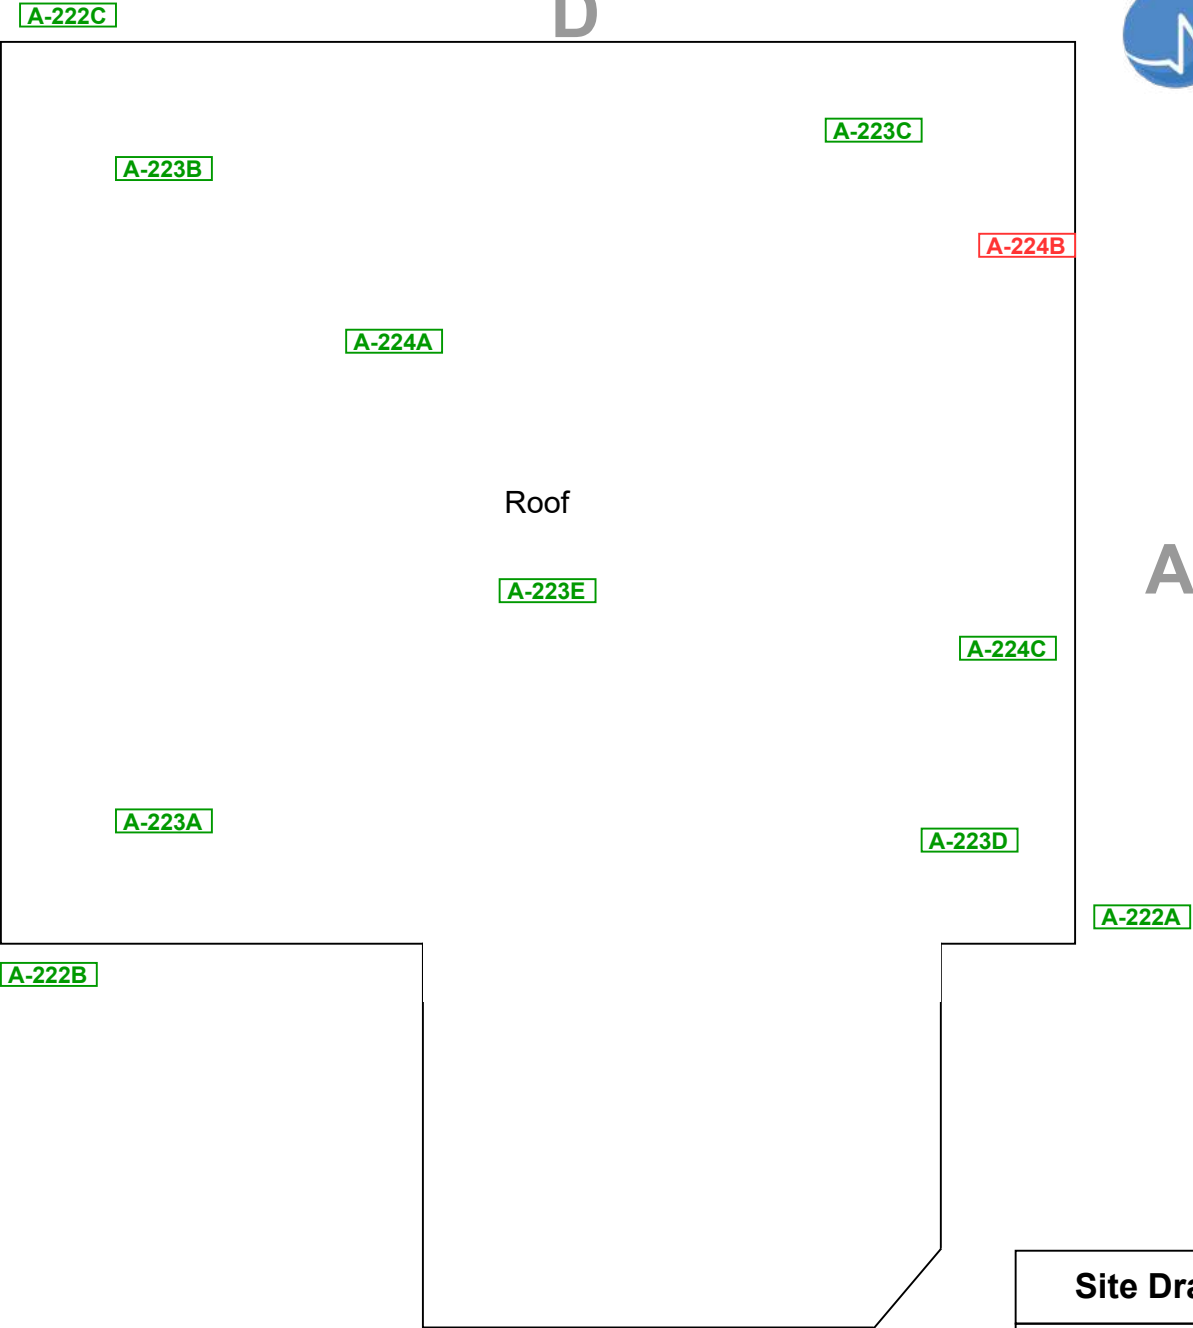

LEGEND:

A



= Positive Asbestos Sample Locations

A

= Negative Asbestos Sample Locations

B-05, Exterior and Roof

Site Drawing - Asbestos - Page 20 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

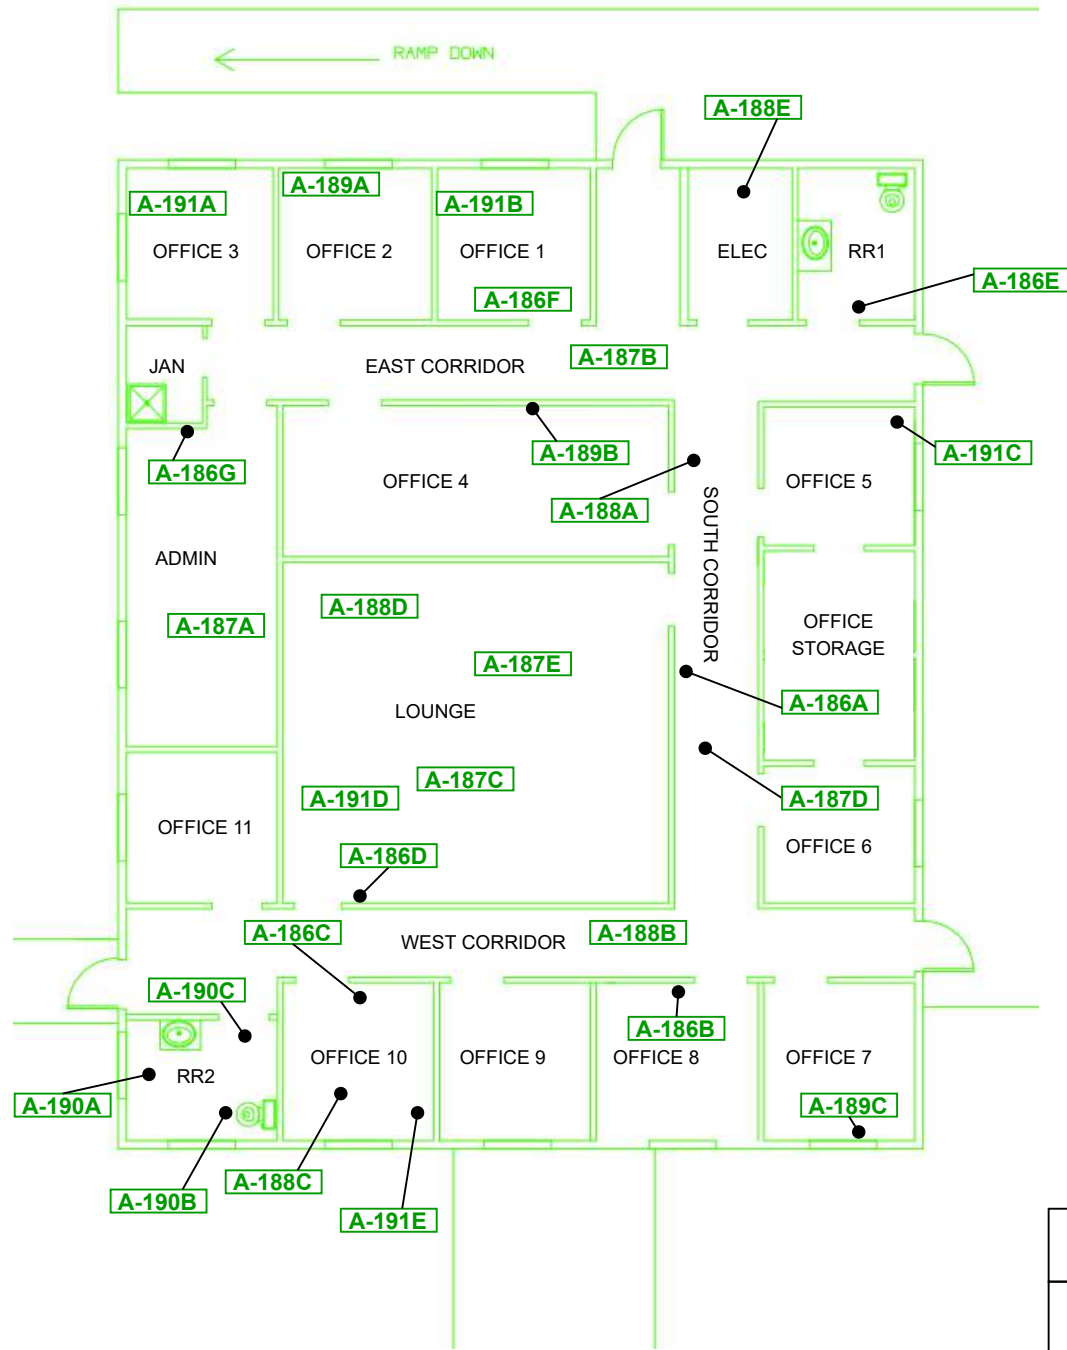

B-08, 1st Floor



Site Drawing - Asbestos - Page 21 of 36



High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

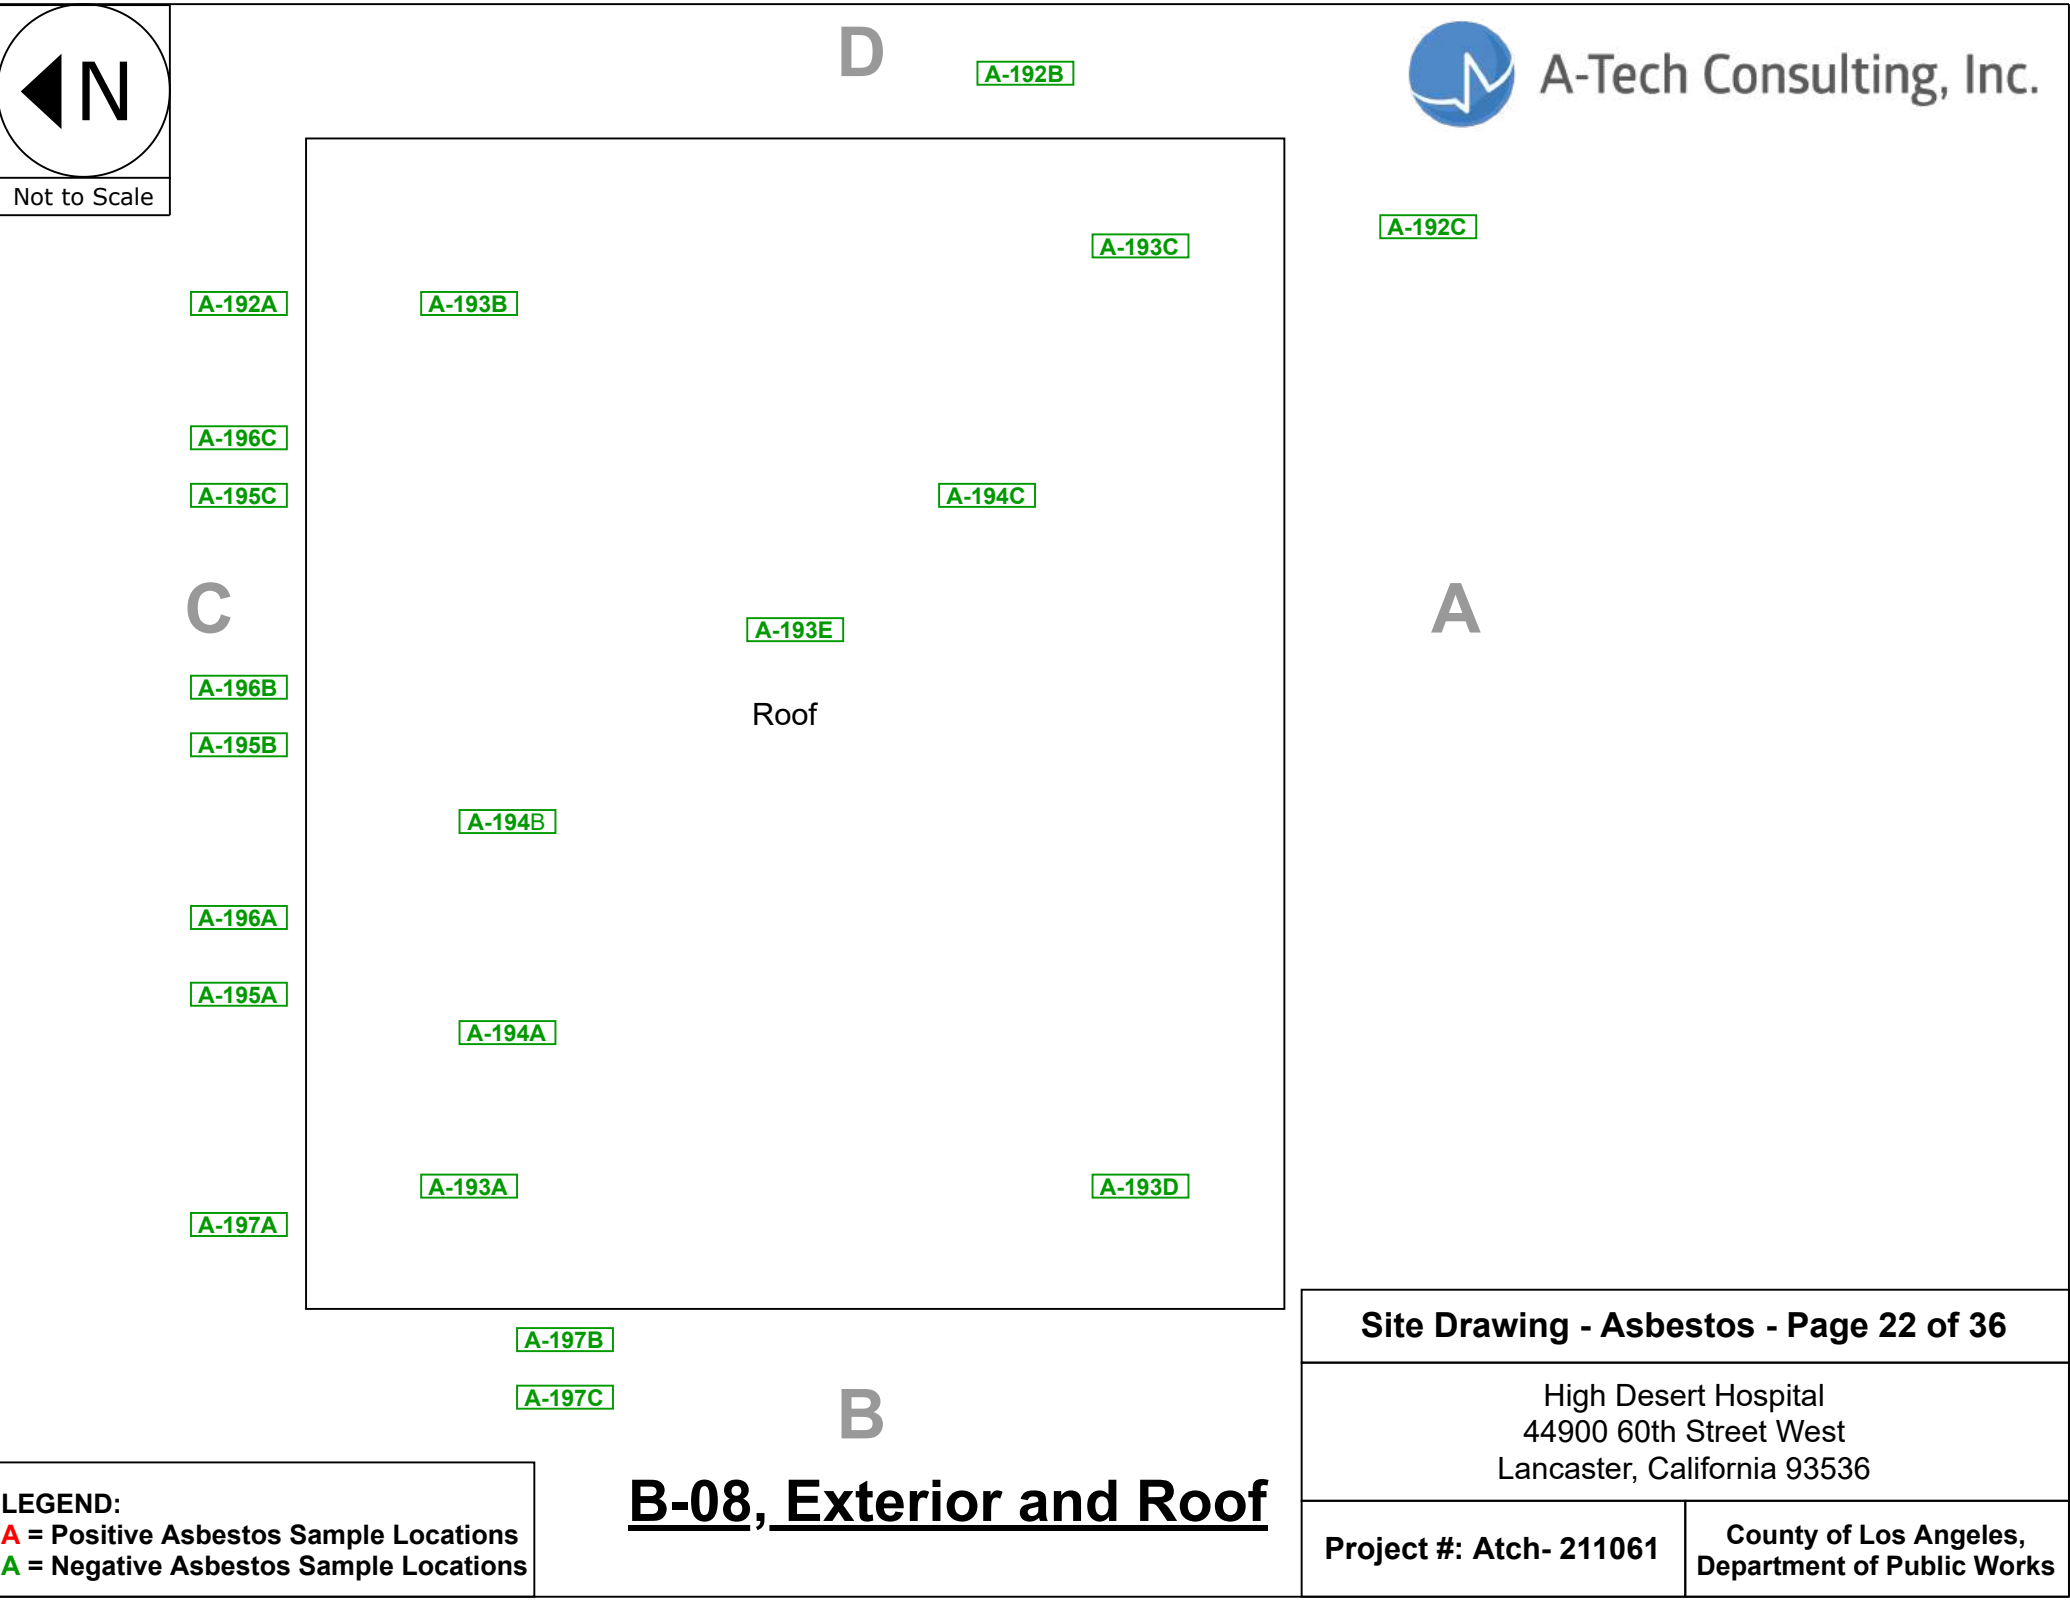

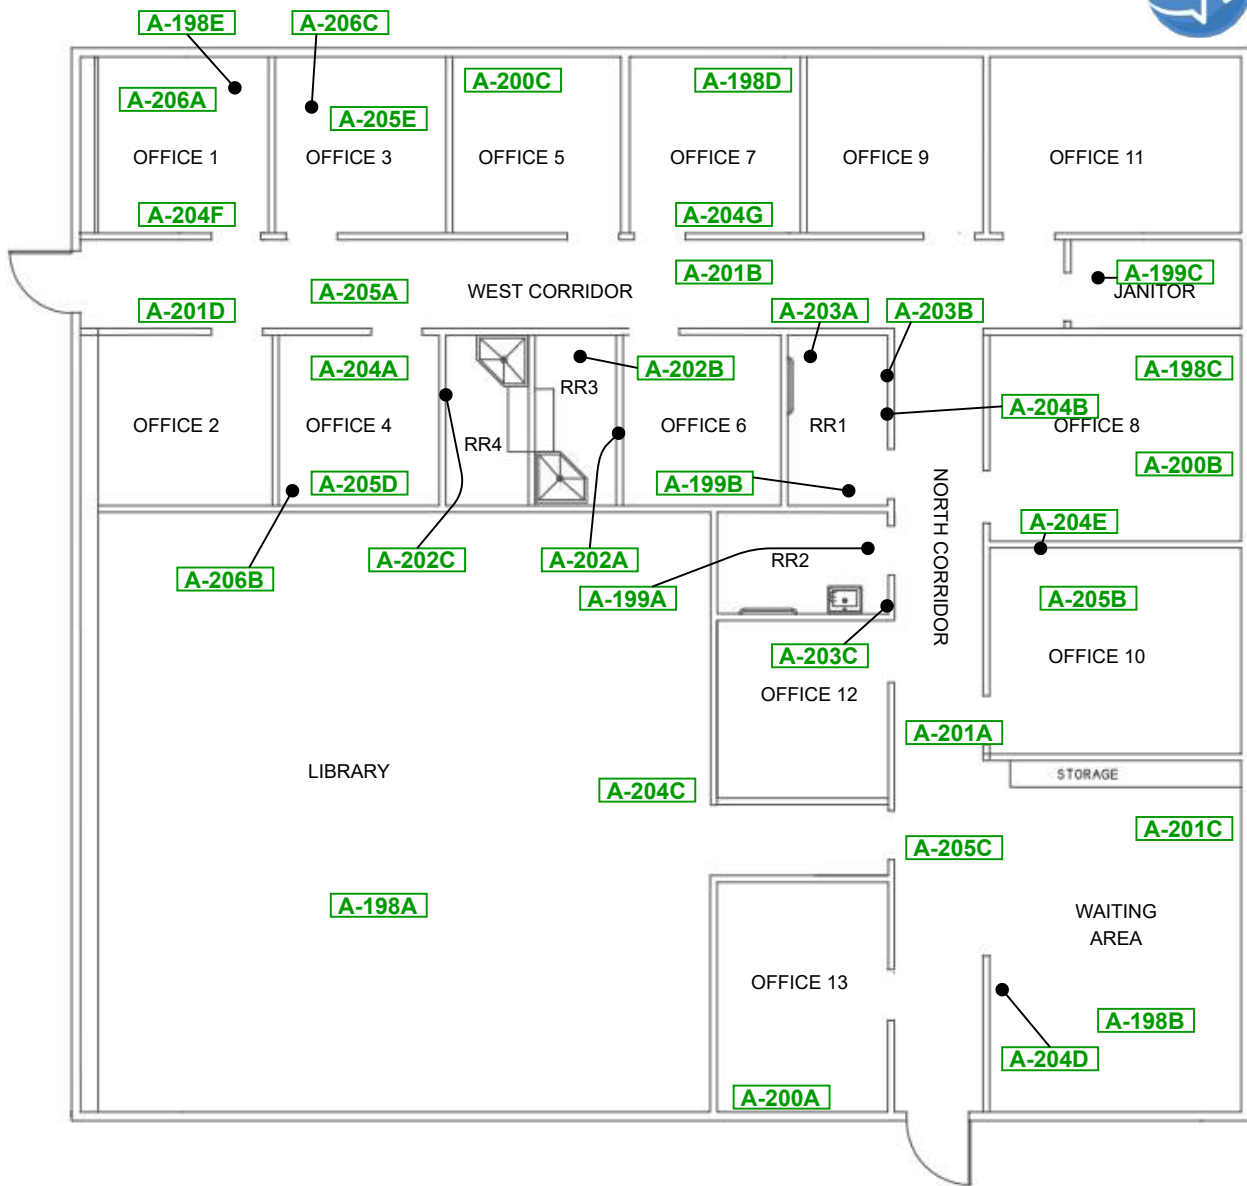


LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

B-07, 1st Floor

Site Drawing - Asbestos - Page 23 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

N▶

Not to Scale

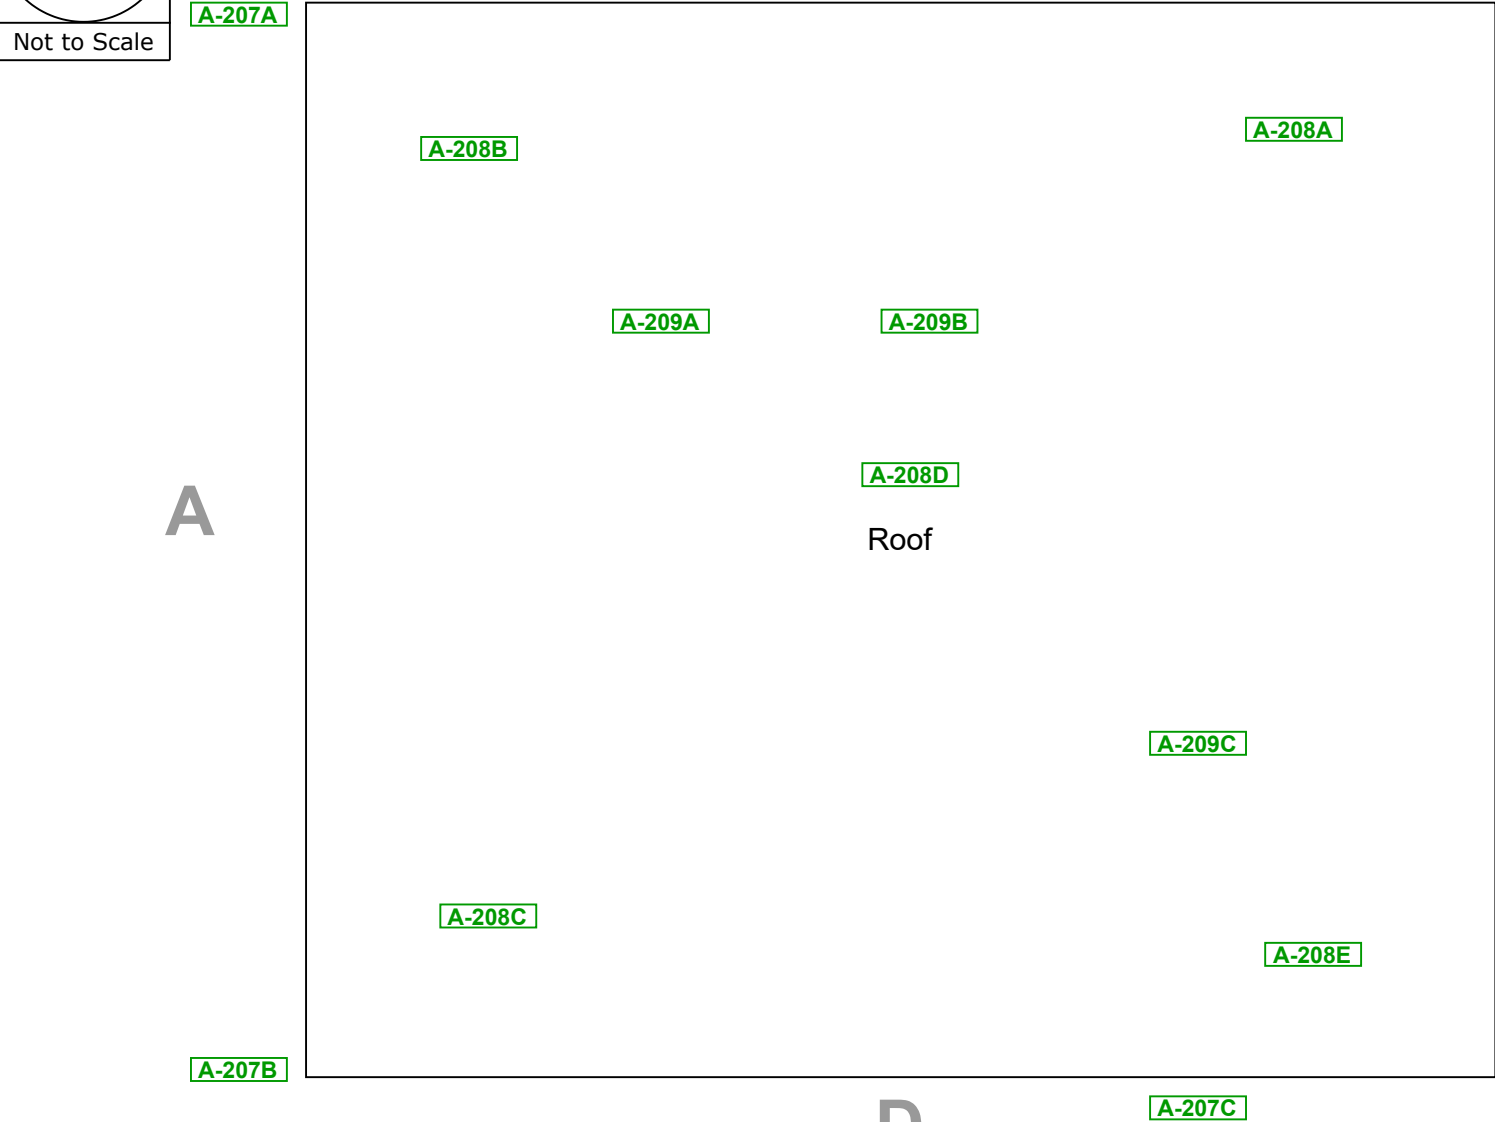

B-07, Exterior and Roof

LEGEND:


A

= Positive Asbestos Sample Locations

A

= Negative Asbestos Sample Locations


Site Drawing - Asbestos - Page 24 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



Not to Scale





A-Tech Consulting, Inc.

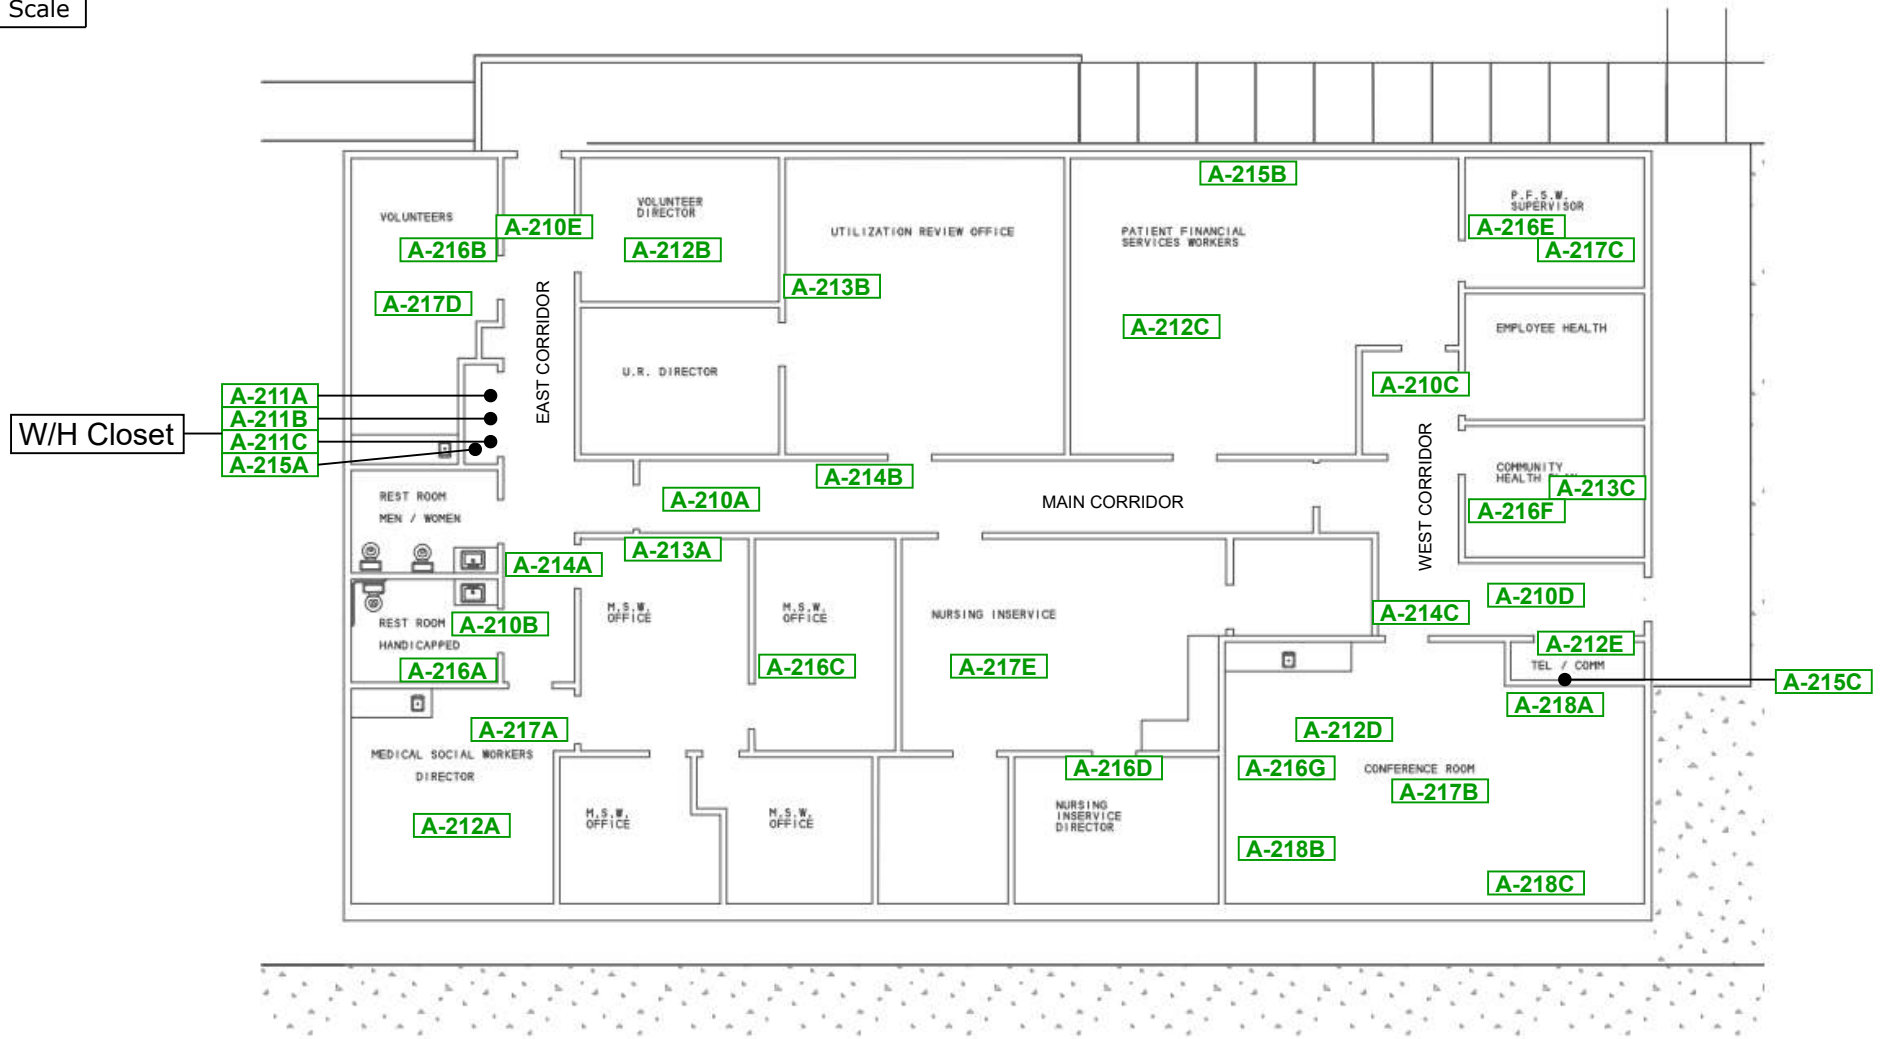

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

B-01, 1st Floor


Site Drawing - Asbestos - Page 25 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

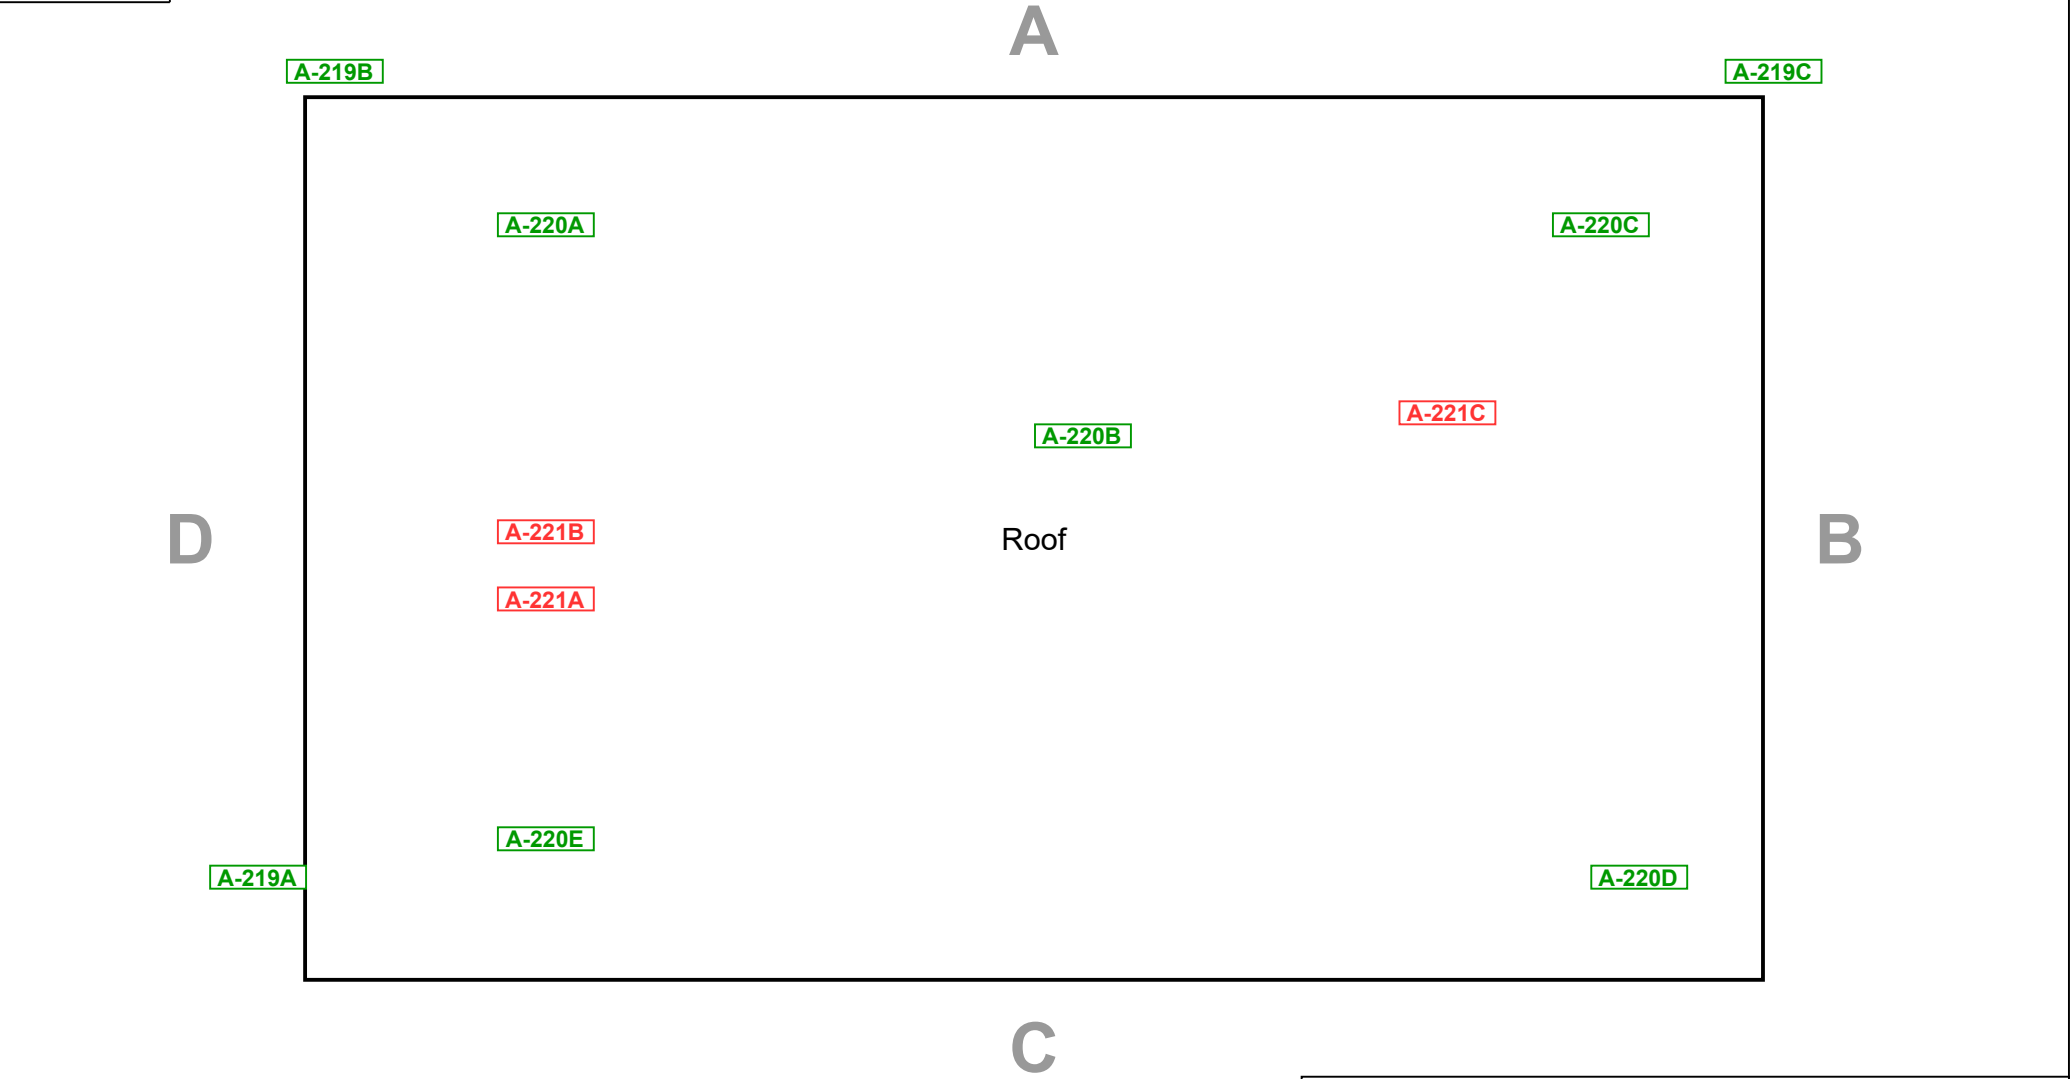


B-01, Exterior and Roof

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

Site Drawing - Asbestos - Page 26 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works




Not to Scale

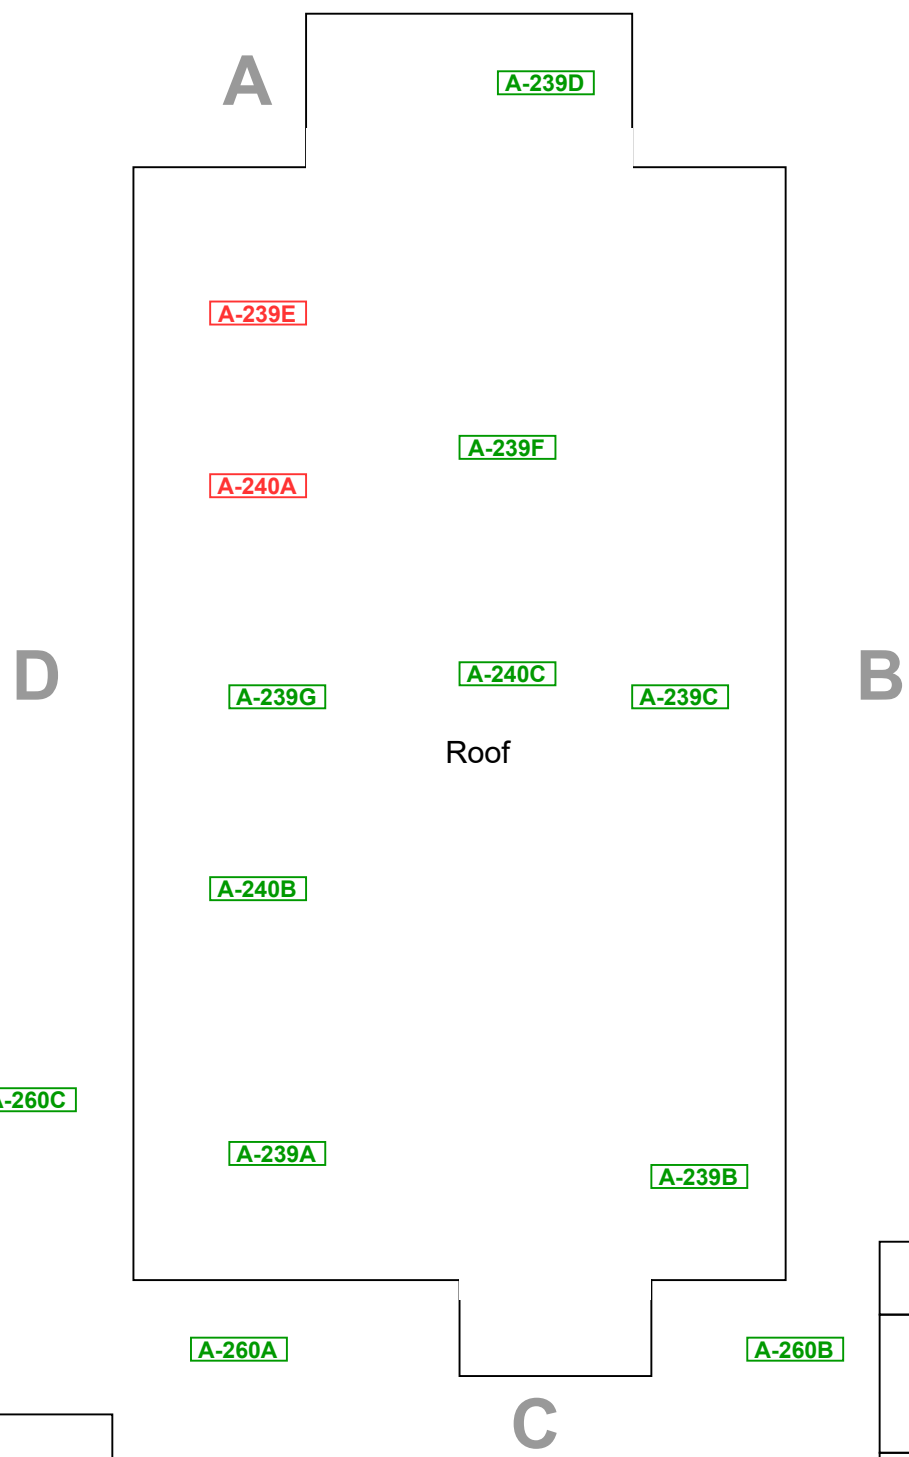


LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

B-04, Exterior and Roof

Site Drawing - Asbestos - Page 28 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works




Not to Scale

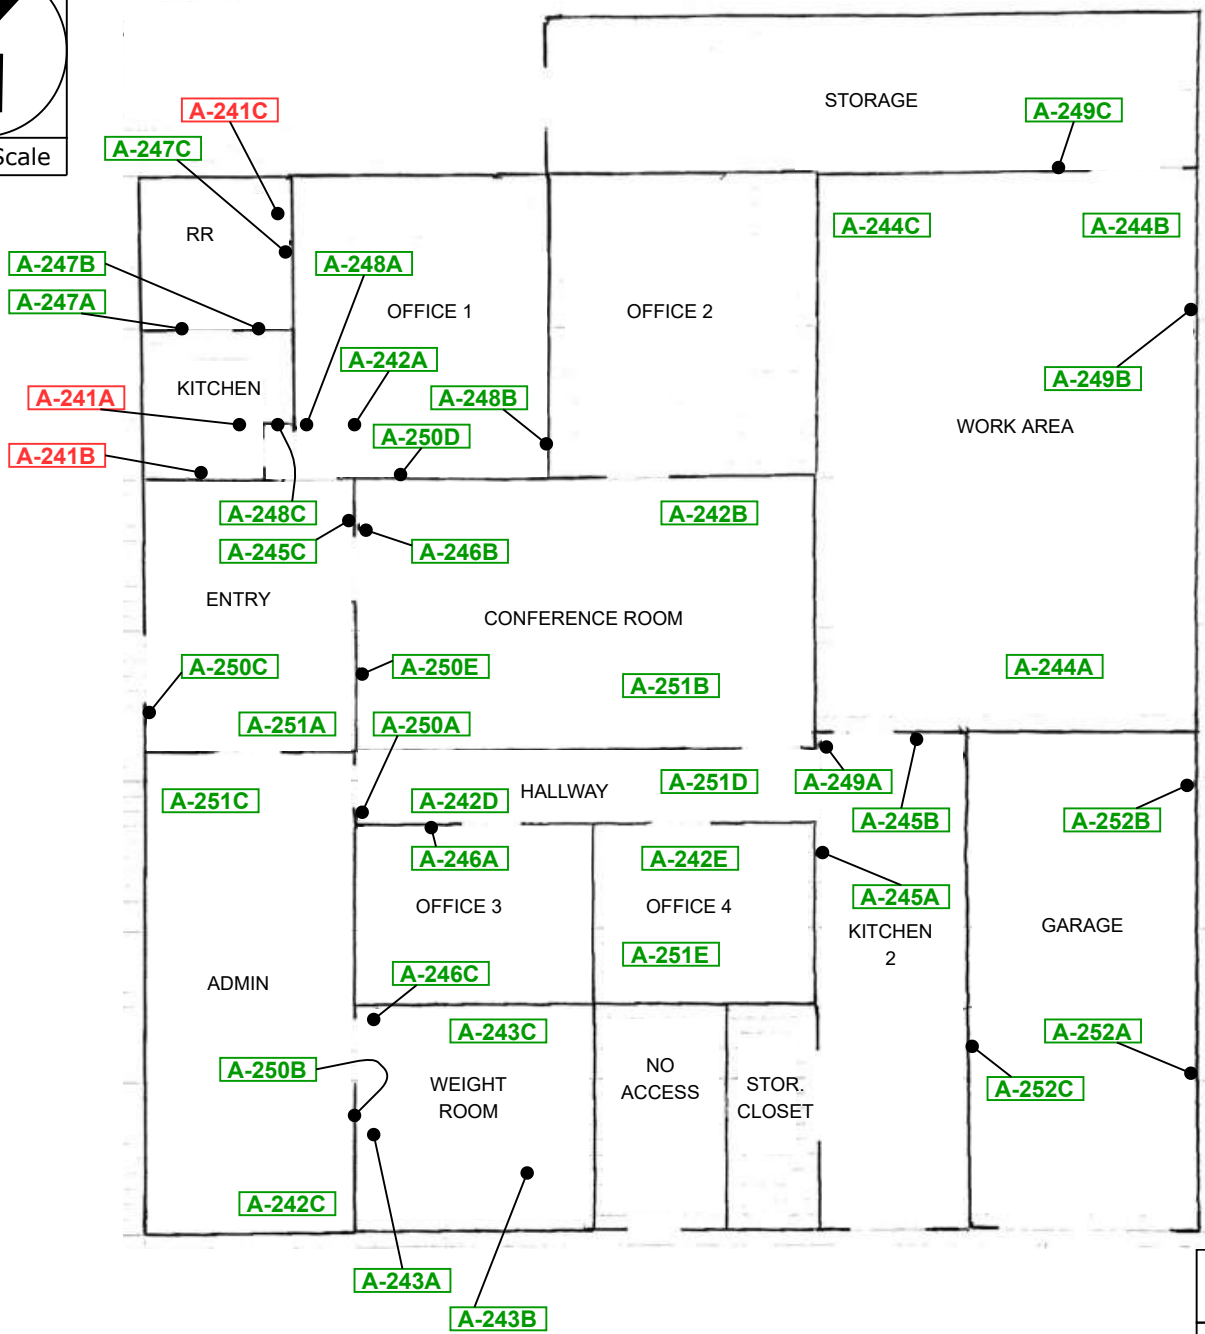


LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

B-11, 1st Floor

Site Drawing - Asbestos - Page 29 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works





Not to Scale

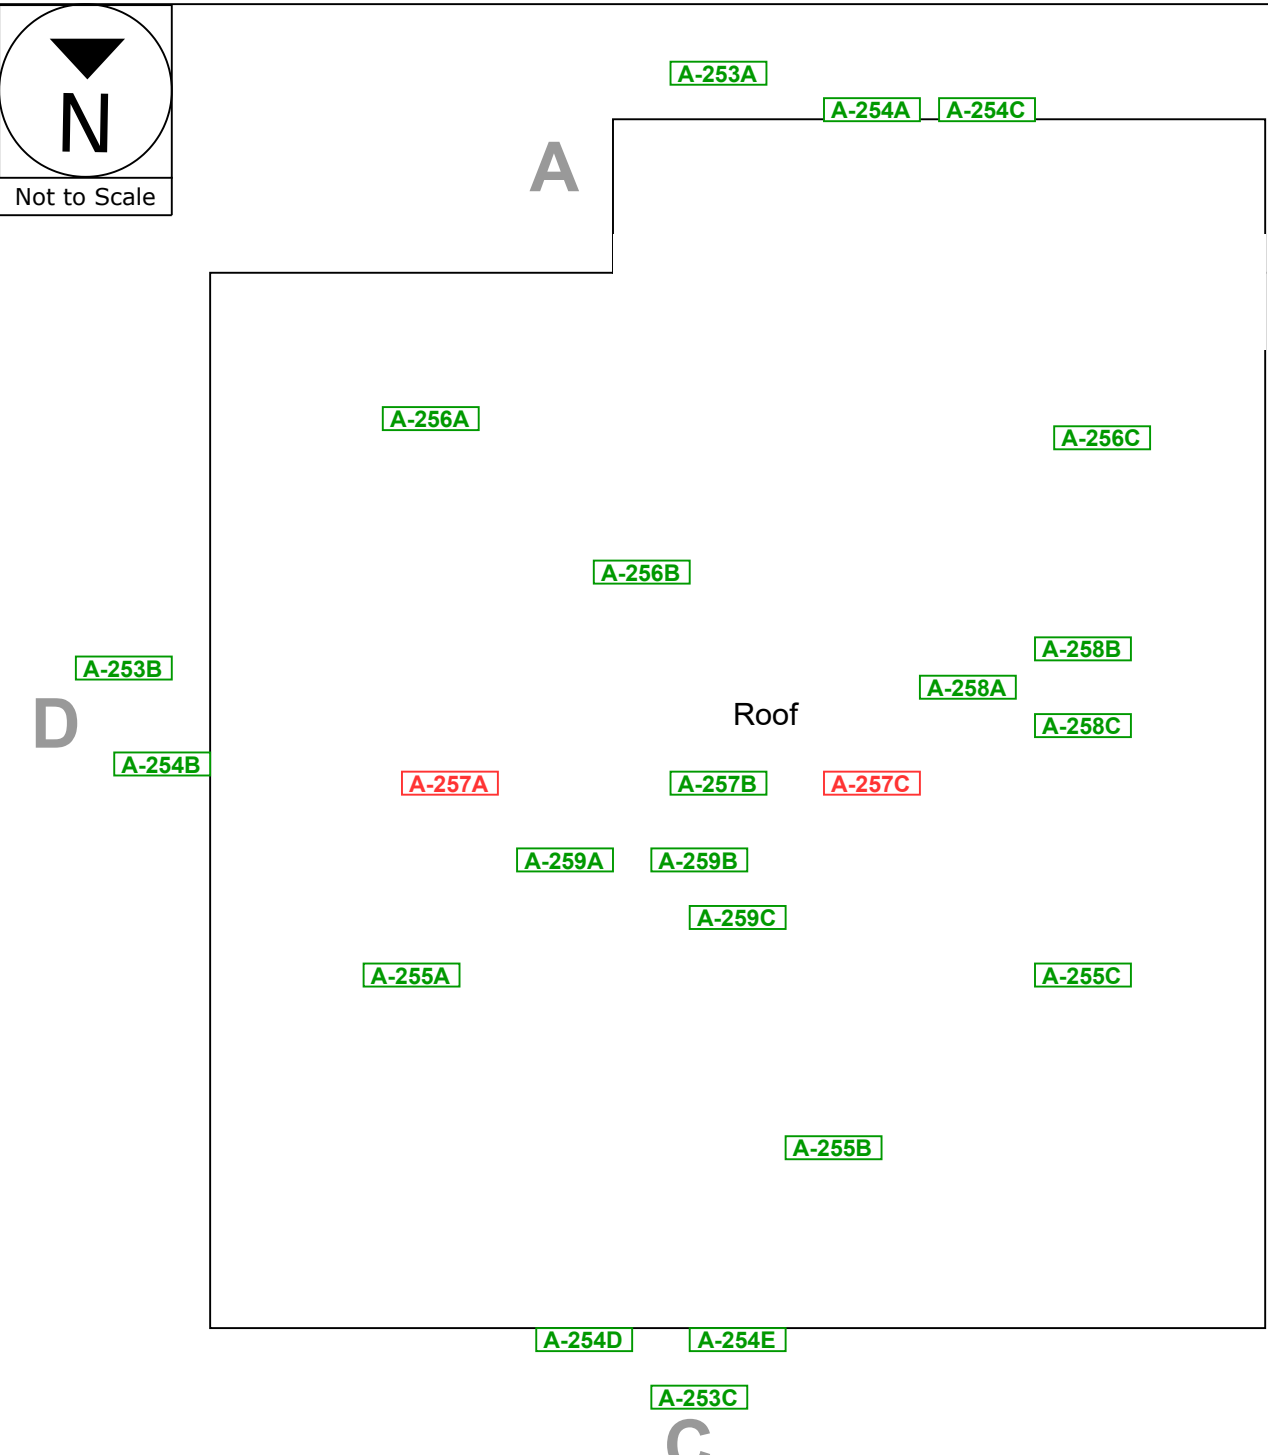

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

B-11, Exterior and Roof


Site Drawing - Asbestos - Page 30 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

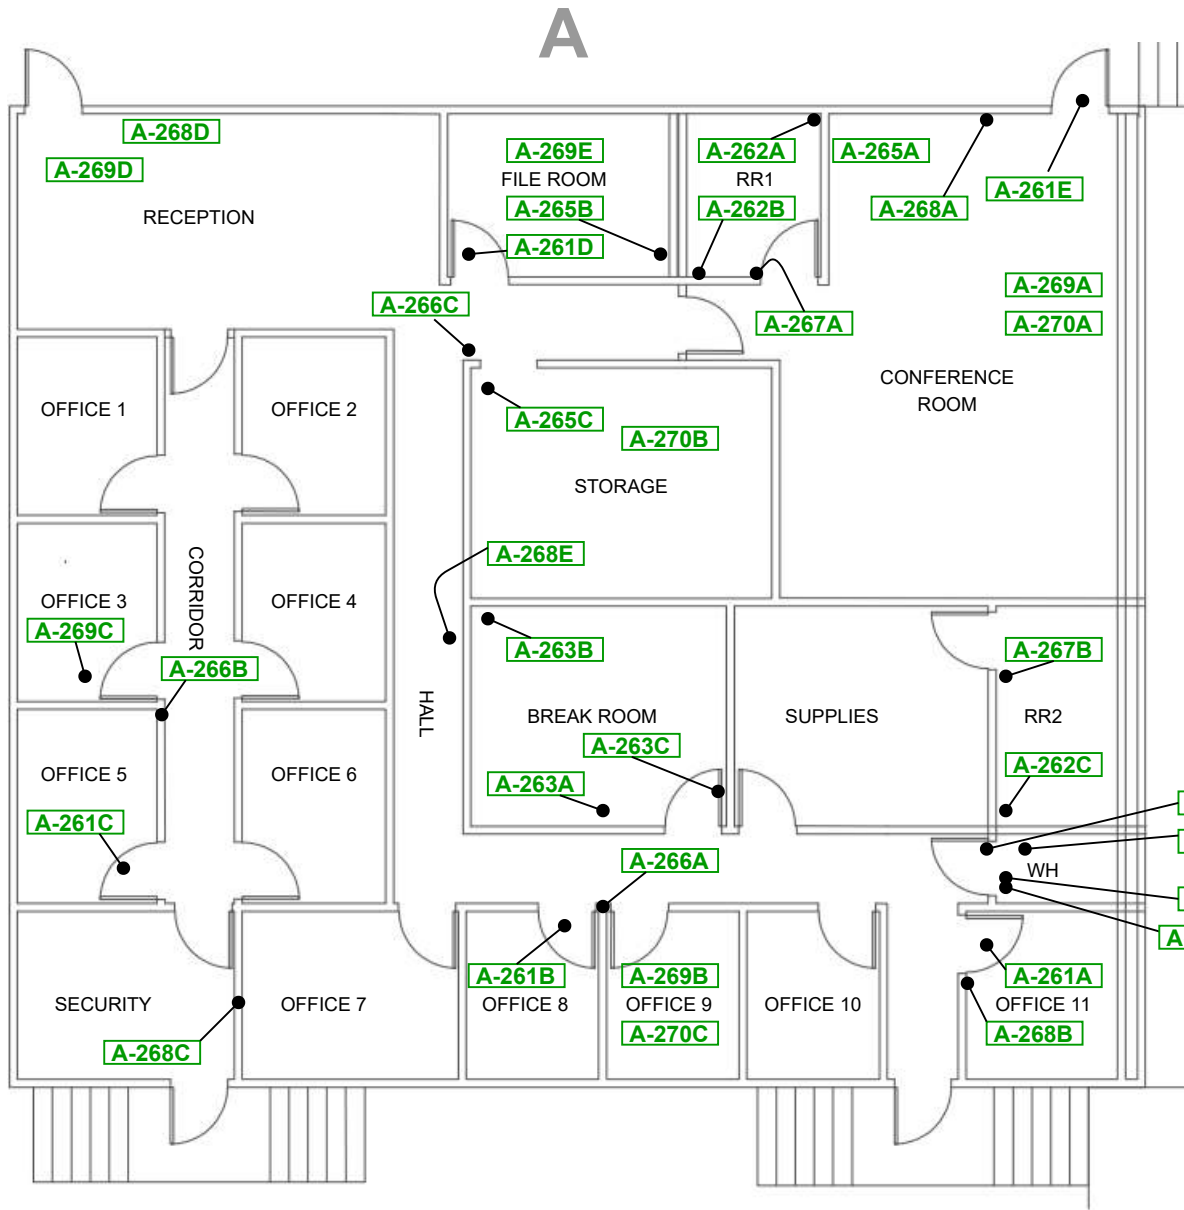

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

B-06, 1st Floor

Site Drawing - Asbestos - Page 31 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



A

A-271C

A-273A

A-273B

A-272A

A-272B

A-272C

Roof

A-273C

A-272D

A-272E

A-271A

A-271B

C

B

D

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations


B-06, Exterior and Roof

Site Drawing - Asbestos - Page 32 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536


Project #: Atch- 211061

County of Los Angeles,
Department of Public Works



**County of Los Angeles,
Department of Public Works**



A = Positive Asbestos Sample Locations
G = Negative Asbestos Sample Locations

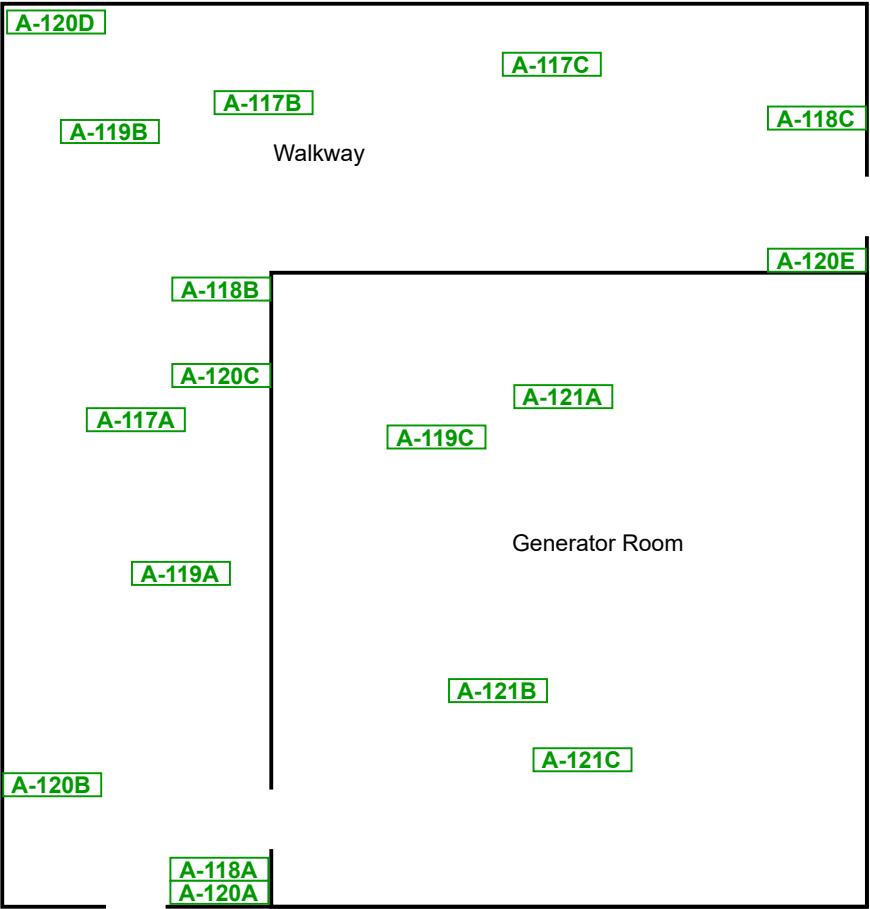

Emergency Power Building, 1st Floor

LEGEND:
■ = Positive Asbestos Sample Locations
■ = Negative Asbestos Sample Locations

Site Drawing - Asbestos - Page 34 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

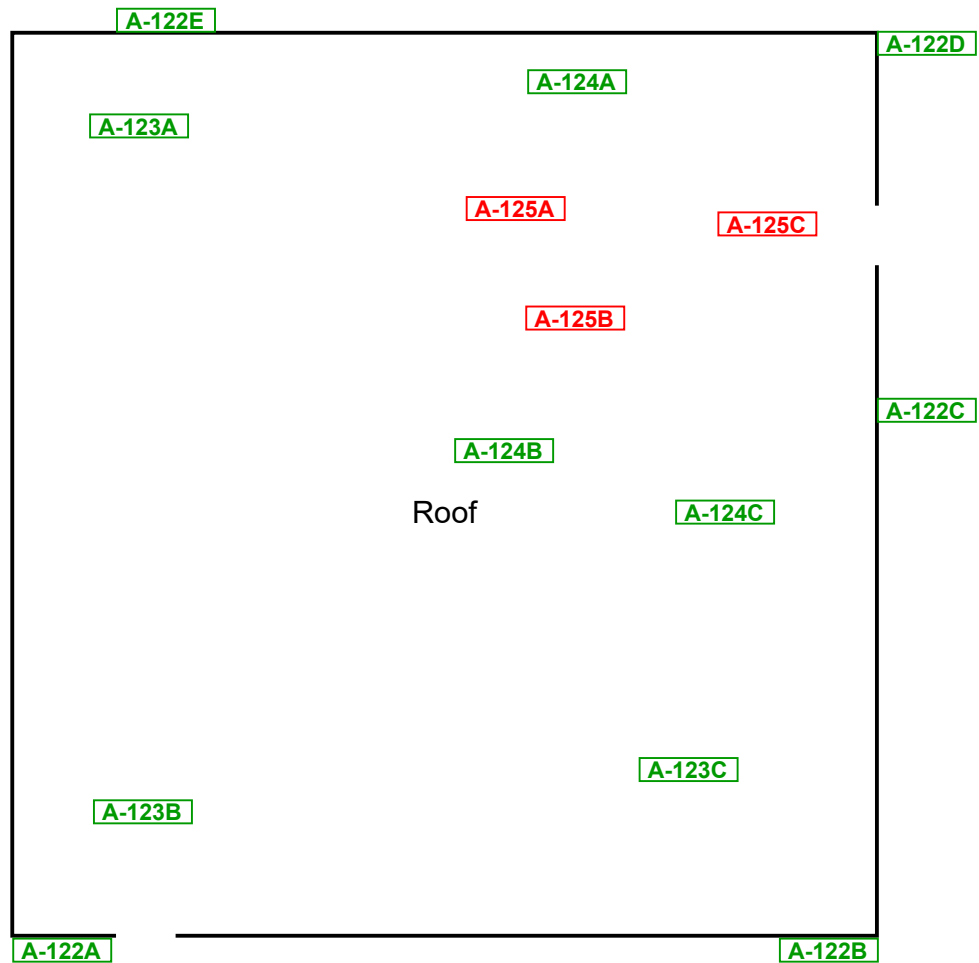

Emergency Power Building, Exterior and Roof



Site Drawing - Asbestos - Page 35 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

LEGEND:
A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations

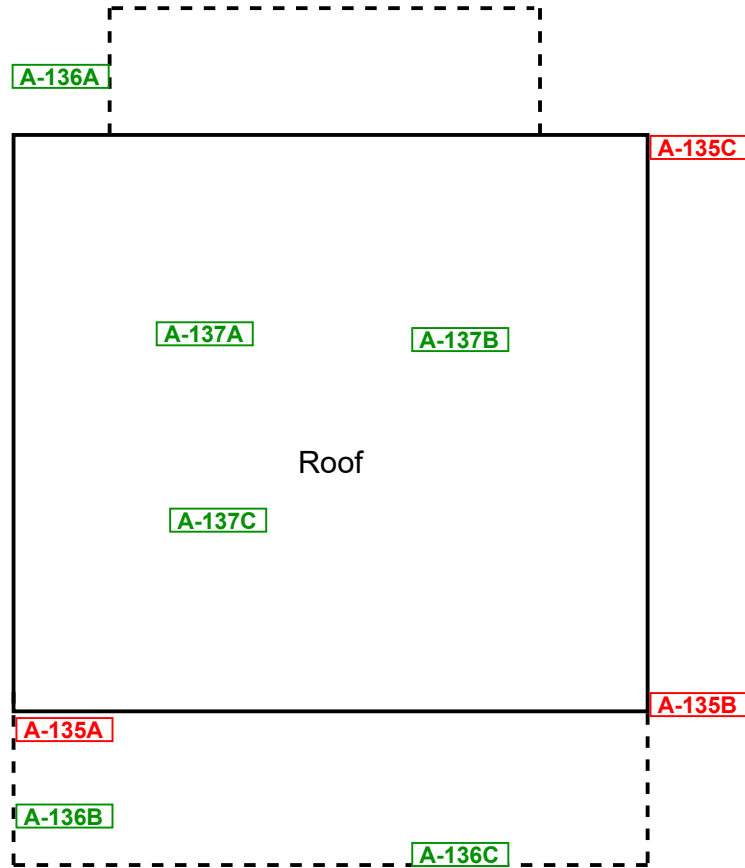

Hazardous Waste Building, Exterior and Roof

Site Drawing - Asbestos - Page 36 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

LEGEND:

A = Positive Asbestos Sample Locations
A = Negative Asbestos Sample Locations



Digital Photographs - Asbestos

Locations: High Desert Hospital, 44900 60th Street West

Client Name: County of Los Angeles, Department of Public Works

Area: Various Buildings, Interior and Exterior



View of 12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic



View of 12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic



View of 12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic



View of 12" x 12" White with Light Brown Streaked Resilient Flooring/Resilient Floor Mastic



View of 12" x 12" Light Brown with Red Streaked Resilient Flooring/Resilient Floor Mastic



View of 12" x 12" Dark Brown with Tan Streaked Resilient Flooring/Resilient Floor Mastic



View of Carpet Glue with Leveling Compound



View of 12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic



View of 9" x 9" Pink with Black and Red Streaked Resilient Flooring/Resilient Floor Mastic



View of 9" x 9" Light Brown with Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic



View of 9" x 9" Pink with Red and Brown Streaked Resilient
Flooring/Resilient Floor Mastic



View of 12" x 12" Tan With Brown and White Streaked Resilient
Flooring/Resilient Floor Mastic



View of 9" x 9" Green with White Streaked Resilient
Flooring/Resilient Floor Mastic



View of 12" x 12" Light Tan with Light Brown Streaked Resilient
Flooring/Resilient Floor Mastic



View of 12" x 12" White with Blue and Red Streaked Resilient
Flooring/Resilient Floor Mastic



View of 12" x 12" Brown and White Streaked Resilient
Flooring/Resilient Floor Mastic



View of 12" x 12" Orange with White Streaked Resilient Flooring/Resilient Floor Mastic



View of 12" x 12" Off-White with Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic



View of 24" x 24" Gold Resilient Flooring/Resilient Floor Mastic



View of 12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic



View of 12" x 12" Granite Pattern Resilient Flooring/Resilient FloorMastic



View of 9" x 9" Brown with White Streaked Resilient Flooring/Resilient Floor Mastic



View of Wheat Tape with Yellow Insulation Pipe Wrap



View of Concrete



View of Fireproofing



View of Light Brown Boiler TSI



View of 4" Thermal System Insulation Pipe Elbows/Runs



View of 2" Thermal System Insulation Pipe Elbows/Runs



View of 4" Thermal System Insulation Pipe Run Wrapped in Foil



View of Red Laced Pipe Insulation



View of 12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic




View of 12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic



View of 12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic



View of 12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic

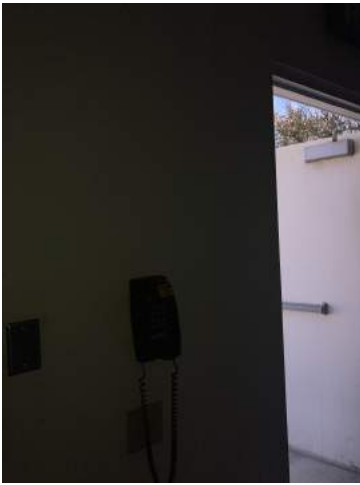

View of Drywall with Joint Compound



View of Acoustic Spray-On



View of 6" Black Cove Base/Cove Base Mastic



View of Exterior Stucco with Vapor Barrier



View of Concrete



View of Shingle Roof



View of 12" x 12" Brown with Brown Streaked Resilient Floor Tile/Resilient Floor Mastic



View of Black Mounting Mastic



View of Silver Mastic



View of Brick and Mortar



View of Dark Blue with White Spots Vinyl Sheet



View of Carpet Glue with Vinyl Flooring



View of Penetration Mastic



View of Woven Roof Material with Sealant



View of Silver Penetration Mastic



View of Brown Penetration Mastic



View of Rolled Roof



View of Black Penetration Mastic



View of 12" x 12" Tan with Brown and White Streaked
Resilient Floor Tile/Resilient Floor Mastic



View of Penetration Mastic



Digital Photographs - HAZMAT

Locations: High Desert Hospital, 44900 60th Street West

Client Name: County of Los Angeles, Department of Public Works

Area: Various Buildings, Interior and Exterior




View of Generator Label



View of Generator Label



View of Generator

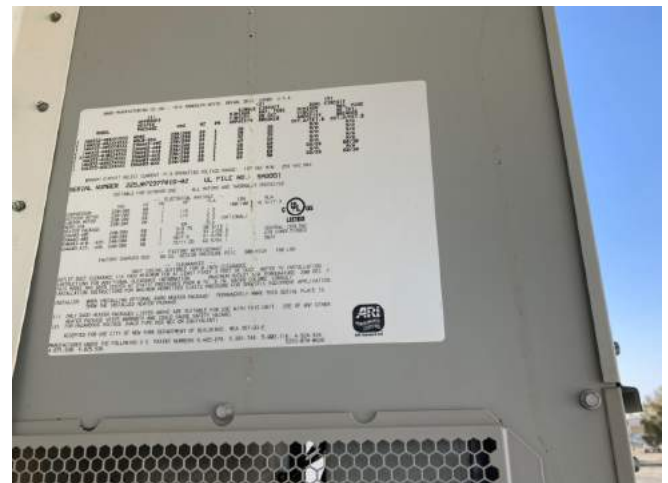

View of HVAC Label



View of HVAC



View of Transformers



View of Transformers



View of Mercury Switch



View of Mercury Switch



View of Mercury-Containing Light Bulb



View of Mercury-Containing Light Bulb



View of Large Boilers in Mechanical Room



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105788
Samples Submitted: 12
Samples Analyzed: 12
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210578801

Client ID: A-001A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210578802

Client ID: A-001B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 2%	Binder/Filler

Lab ID: 210578803

Client ID: A-001C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210578804

Client ID: A-001D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 2%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105788
Samples Submitted: 12
Samples Analyzed: 12
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210578805

Client ID: A-001E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
4.	Grey compacted powdery material	None Detected	Cellulose 2%	Binder/Filler

Lab ID: 210578806

Client ID: A-001F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 2%	Binder/Filler

Lab ID: 210578807

Client ID: A-001G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 2%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105788
Samples Submitted: 12
Samples Analyzed: 12
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210578808

Client ID: A-002A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 2%	Binder/Filler
4.	White compacted powdery material	None Detected	Cellulose 2%	Binder/Filler

Lab ID: 210578809

Client ID: A-002B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 2%	Binder/Filler

Lab ID: 210578810

Client ID: A-002C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 2%	Binder/Filler
4.	White compacted powdery material	None Detected	Cellulose 2%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105788
Samples Submitted: 12
Samples Analyzed: 12
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210578811

Client ID: A-002D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
4.	Grey compacted powdery material	None Detected	Cellulose 2%	Binder/Filler
5.	White compacted powdery material	None Detected	Cellulose 2%	Binder/Filler

Lab ID: 210578812

Client ID: A-002E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 2%	Binder/Filler





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105788
Samples Submitted: 12
Samples Analyzed: 12
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Manar Ahmad

Signature: 

Date: 04-16-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 04-16-2021

*Total Layers Analyzed: 41

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105789
Samples Submitted: 15
Samples Analyzed: 15
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210578901

Client ID: A-003A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan gummy mastic	None Detected	None Detected	Mastic/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 3%	Binder/Filler
4.	Trace of black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Lab ID: 210578902

Client ID: A-003B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan gummy mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210578903

Client ID: A-003C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan gummy mastic	None Detected	None Detected	Mastic/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 3%	Binder/Filler
4.	Trace of black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Lab ID: 210578904

Client ID: A-003D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan gummy mastic with debris	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105789
Samples Submitted: 15
Samples Analyzed: 15
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210578905

Client ID: A-003E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan gummy mastic	None Detected	None Detected	Mastic/Binder
3.	Grey compacted powdery material	None Detected	Cellulose 3%	Binder/Filler
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Lab ID: 210578906

Client ID: A-004A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Hard grey compacted powdery material	None Detected	Cellulose 3%	Binder/Filler

Lab ID: 210578907

Client ID: A-004B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Hard grey compacted powdery material	None Detected	Cellulose 3%	Binder/Filler
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105789
Samples Submitted: 15
Samples Analyzed: 15
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210578908

Client ID: A-004C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210578909

Client ID: A-005A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Lab ID: 210578910

Client ID: A-005B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Lab ID: 210578911

Client ID: A-005C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105789
Samples Submitted: 15
Samples Analyzed: 15
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210578912

Client ID: A-005D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Lab ID: 210578913

Client ID: A-005E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles
3.	White compacted powdery material	None Detected	Cellulose 3%	Binder/Filler

Lab ID: 210578914

Client ID: A-005F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Lab ID: 210578915

Client ID: A-005G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
4.	White compacted powdery material	None Detected	Cellulose 3%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105789
Samples Submitted: 15
Samples Analyzed: 15
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Hanaa
Armanious

Signature: 

Date: 04-16-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 04-16-2021

*Total Layers Analyzed: 43

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105790
Samples Submitted: 17
Samples Analyzed: 17
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579001

Client ID: A-006A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Trace of grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210579002

Client ID: A-006B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579003

Client ID: A-006C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Lab ID: 210579004

Client ID: A-006D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105790
Samples Submitted: 17
Samples Analyzed: 17
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579005

Client ID: A-006E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579006

Client ID: A-007A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder
2.	White sandy material	None Detected	None Detected	Binder/Filler
3.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
4.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210579007

Client ID: A-007B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210579008

Client ID: A-007C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic with debris	None Detected	Synthetic Fibers <1%	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105790
Samples Submitted: 17
Samples Analyzed: 17
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579009

Client ID: A-007D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic with debris	None Detected	Synthetic Fibers <1%	Mastic/Binder

Lab ID: 210579010

Client ID: A-007E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic with debris	None Detected	Synthetic Fibers <1%	Mastic/Binder
2.	Trace of dark brown mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210579011

Client ID: A-007F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan adhesive	None Detected	None Detected	Mastic/Binder
2.	Green/grey floor tile	None Detected	None Detected	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
5.	White/grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579012

Client ID: A-007G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105790
Samples Submitted: 17
Samples Analyzed: 17
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579013

Client ID: A-008A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown gummy mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210579014

Client ID: A-008B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Mastic/Binder, Fine Particles

Lab ID: 210579015

Client ID: A-008C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown gummy mastic	None Detected	None Detected	Mastic/Binder
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105790
Samples Submitted: 17
Samples Analyzed: 17
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579016

Client ID: A-008D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown gummy mastic with debris	None Detected	None Detected	Mastic/Binder, Fine Particles
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579017

Client ID: A-008E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown gummy mastic	None Detected	None Detected	Mastic/Binder
4.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105790
Samples Submitted: 17
Samples Analyzed: 17
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Calvin Nguyen

Signature: 

Date: 04-16-2021

Reviewed by: Vivian Le

Signature: 

Date: 04-16-2021

*Total Layers Analyzed: 50

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105791
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579101

Client ID: A-009A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Brown compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579102

Client ID: A-009B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Brown compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579103

Client ID: A-009C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Brown compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579104

Client ID: A-010A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Brown compacted powdery material	None Detected	None Detected	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105791
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579105

Client ID: A-010B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Brown compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579106

Client ID: A-010C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Brown compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579107

Client ID: A-011A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579108

Client ID: A-011B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105791
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210579109

Client ID: A-011C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579110

Client ID: A-011D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579111

Client ID: A-011E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579112

Client ID: A-013A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105791
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579113

Client ID: A-013B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579114

Client ID: A-013C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579115

Client ID: A-014A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green mastic	None Detected	Synthetic Fibers 2%	Mastic/Binder

Lab ID: 210579116

Client ID: A-014B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green mastic	None Detected	Synthetic Fibers 2%	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105791
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Calvin Nguyen

Signature: 

Date: 04-16-2021

Reviewed by: Vivian Le

Signature: 

Date: 04-16-2021

*Total Layers Analyzed: 44

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105792
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210579201

Client ID: A-014C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green mastic	None Detected	Synthetic Fibers 2%	Mastic/Binder

Lab ID: 210579202

Client ID: A-015A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	Chrysotile 4%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579203

Client ID: A-015B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	Chrysotile 4%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579204

Client ID: A-015C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	Chrysotile 4%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579205

Client ID: A-015D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	Chrysotile 4%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105792
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210579206

Client ID: A-015E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	Chrysotile 4%	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579207

Client ID: A-016A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey/tan cementitious material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains, Paint

Lab ID: 210579208

Client ID: A-016B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey/tan cementitious material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains, Paint

Lab ID: 210579209

Client ID: A-016C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains, Paint

Lab ID: 210579210

Client ID: A-016D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains, Paint

Lab ID: 210579211

Client ID: A-016E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains, Paint



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105792
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210579212

Client ID: A-016F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210579213

Client ID: A-016G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains, Paint

Lab ID: 210579214

Client ID: A-017A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream/brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579215

Client ID: A-017B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream/brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579216

Client ID: A-017C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream/brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan/black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105792
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579217

Client ID: A-017D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream/brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	Cellulose 2%	Asphalt/Binder

Lab ID: 210579218

Client ID: A-017E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream/brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan/black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Analyzed by: Hanaa
Armanious

Signature:

Date: 04-16-2021

Reviewed by: Zubair Ahmed

Signature:

Date: 04-16-2021

*Total Layers Analyzed: 28

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105793
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579301

Client ID: A-017F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan/brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210579302

Client ID: A-017G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan/brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210579303

Client ID: A-018A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210579304

Client ID: A-018B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210579305

Client ID: A-018C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105793
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579306

Client ID: A-019A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Black coating	None Detected	None Detected	Binder/Filler
3.	White mastic	None Detected	None Detected	Mastic/Binder
4.	Cream compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579307

Client ID: A-019B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Black coating	None Detected	None Detected	Binder/Filler
3.	White mastic	None Detected	None Detected	Mastic/Binder
4.	Cream compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579308

Client ID: A-019C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Black coating	None Detected	None Detected	Binder/Filler
3.	White mastic	None Detected	None Detected	Mastic/Binder
4.	Cream compacted powdery material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105793
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579309

Client ID: A-019D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Black coating	None Detected	None Detected	Binder/Filler
3.	White mastic	None Detected	None Detected	Mastic/Binder
4.	Cream compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579310

Client ID: A-019E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler
4.	Trace of black asphaltic mastic	None Detected	None Detected	Asphalt/Binder
5.	Grey compacted powdery material	None Detected	None Detected	Binder/Filler
6.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579311

Client ID: A-019F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey mastic	None Detected	None Detected	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105793
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210579312

Client ID: A-019G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210579313

Client ID: A-020A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579314

Client ID: A-020B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579315

Client ID: A-020C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105793
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579316

Client ID: A-020D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579317

Client ID: A-020E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579318

Client ID: A-021A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains
4.	Black asphaltic mastic with grey coating	Chrysotile 2%	None Detected	Asphalt/Binder





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105793
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Don Nguyen

Signature: 

Date: 04-17-2021

Reviewed by: Vivian Le

Signature: 

Date: 04-17-2021

*Total Layers Analyzed: 51

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105794
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579401

Client ID: A-021B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic with debris	Chrysotile 2%	Cellulose 2%	Asphalt/Binder

Lab ID: 210579402

Client ID: A-021C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler
5.	Black asphaltic mastic with debris	Chrysotile 2%	Cellulose 2%	Asphalt/Binder

Lab ID: 210579403

Client ID: A-022A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler
5.	Black asphaltic mastic with debris	Chrysotile 2%	Cellulose 2%	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105794
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210579404

Client ID: A-022B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler
5.	Black asphaltic mastic with debris	Chrysotile 3%	Cellulose 2%	Asphalt/Binder

Lab ID: 210579405

Client ID: A-022C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic with debris	Chrysotile 3%	Cellulose 2%	Asphalt/Binder

Lab ID: 210579406

Client ID: A-022D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler
5.	Black asphaltic mastic with debris	Chrysotile 2%	Cellulose 2%	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105794
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210579407

Client ID: A-022E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler
5.	Black asphaltic mastic with debris	Chrysotile 3%	Cellulose 2%	Asphalt/Binder

Lab ID: 210579408

Client ID: A-022F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler
5.	Black asphaltic mastic with debris	Chrysotile 3%	Cellulose 2%	Asphalt/Binder

Lab ID: 210579409

Client ID: A-022G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler
5.	Black asphaltic mastic with debris	Chrysotile 3%	Cellulose 2%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105794
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579410

Client ID: A-023A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey fibrous backing	None Detected	Cellulose 50%, Glass Fibers 3%	Paint
3.	White/grey mastic	None Detected	None Detected	Mastic/Binder
4.	White/grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579411

Client ID: A-023B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey fibrous backing	None Detected	Cellulose 50%, Glass Fibers 3%	Paint
3.	White/cream mastic	None Detected	None Detected	Mastic/Binder
4.	White/grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579412

Client ID: A-023C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey fibrous backing	None Detected	Cellulose 50%, Glass Fibers 3%	Paint



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105794
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579413

Client ID: A-024A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Orange floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler
5.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579414

Client ID: A-024B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Orange floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler
5.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579415

Client ID: A-024C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Orange floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105794
Samples Submitted: 16
Samples Analyzed: 16
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579416

Client ID: A-024D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Orange floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Grey powdery material	None Detected	None Detected	Binder/Filler
5.	Tan mastic	None Detected	None Detected	Mastic/Binder

Analyzed by: Calvin Nguyen

Signature: 

Date: 04-17-2021

Reviewed by: Vivian Le

Signature: 

Date: 04-17-2021

*Total Layers Analyzed: 72

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY



Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105795
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210579501

Client ID: A-024E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Orange floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579502

Client ID: A-025A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler
4.	White powdery material	None Detected	None Detected	Binder/Filler
5.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579503

Client ID: A-025B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105795
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579504

Client ID: A-025C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579505

Client ID: A-025D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Grey powdery material	None Detected	None Detected	Binder/Filler
3.	White powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579506

Client ID: A-025E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105795
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579507

Client ID: A-026A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey/cream mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579508

Client ID: A-026B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey/cream mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579509

Client ID: A-026C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey/cream mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2105795
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210579510

Client ID: A-027A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579511

Client ID: A-027B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579512

Client ID: A-027C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210579513

Client ID: A-028A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan floor tile	None Detected	None Detected	Binder/Filler
2.	Grey powdery material	None Detected	None Detected	Binder/Filler
3.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105795
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579514

Client ID: A-028B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579515

Client ID: A-028C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579516

Client ID: A-029A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210579517

Client ID: A-029B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2105795
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210579518

Client ID: A-029C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	Chrysotile 3%	None Detected	Binder/Filler
2.	Black asphaltic mastic with debris	Chrysotile 2%	None Detected	Asphalt/Binder

Analyzed by: Calvin Nguyen

Signature: 

Date: 04-17-2021


Reviewed by: Vivian Le

Signature: 

Date: 04-17-2021

*Total Layers Analyzed: 61

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.

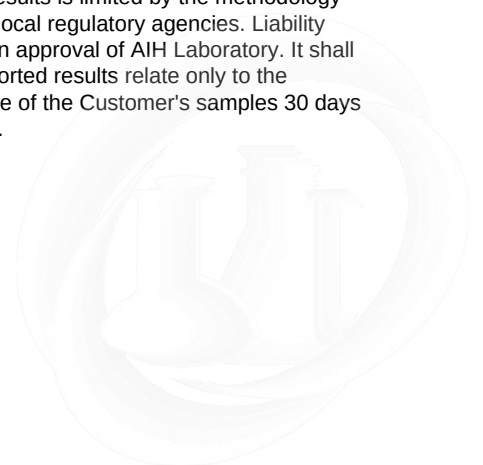



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106038
Samples Submitted: 14
Samples Analyzed: 14
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210603801

Client ID: A-030A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White/tan mastic	None Detected	None Detected	Mastic/Binder
3.	Brown mastic	None Detected	None Detected	Mastic/Binder
4.	Trace of white powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210603802

Client ID: A-030B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210603803

Client ID: A-030C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106038
Samples Submitted: 14
Samples Analyzed: 14
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210603804

Client ID: A-030D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210603805

Client ID: A-030E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210603806

Client ID: A-031A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Brown mastic with paint	None Detected	None Detected	Mastic/Binder

Lab ID: 210603807

Client ID: A-031B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Brown mastic with paint	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106038
Samples Submitted: 14
Samples Analyzed: 14
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210603808

Client ID: A-031C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210603809

Client ID: A-031D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Brown mastic with paint	None Detected	None Detected	Mastic/Binder

Lab ID: 210603810

Client ID: A-031E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Brown mastic with paint	None Detected	None Detected	Mastic/Binder

Lab ID: 210603811

Client ID: A-032A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106038
Samples Submitted: 14
Samples Analyzed: 14
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210603812

Client ID: A-032B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of white powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210603813

Client ID: A-032C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material with paint	None Detected	None Detected	Binder/Filler

Lab ID: 210603814

Client ID: A-033A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White sandy material with paint	None Detected	None Detected	Binder/Filler





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106038
Samples Submitted: 14
Samples Analyzed: 14
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Vivian Le

Signature: 

Date: 04-19-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 04-19-2021

*Total Layers Analyzed: 41

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106039
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210603901

Client ID: A-033B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint and debris	None Detected	Cellulose 2%	Mastic/Binder, Paint

Lab ID: 210603902

Client ID: A-033C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint and debris	None Detected	Cellulose 2%	Mastic/Binder, Paint

Lab ID: 210603903

Client ID: A-034A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Red flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Dark brown brittle mastic	None Detected	Cellulose 2%	Mastic/Binder
3.	Textured white paint	None Detected	None Detected	Binder/Filler, Paint

Lab ID: 210603904

Client ID: A-034B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Red flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Dark brown brittle mastic	None Detected	Cellulose 2%	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106039
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210603905

Client ID: A-034C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Red flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Dark brown brittle mastic	None Detected	Cellulose 2%	Mastic/Binder
3.	Textured white paint	None Detected	None Detected	Binder/Filler, Paint

Lab ID: 210603906

Client ID: A-035A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light green flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint	None Detected	None Detected	Mastic/Binder, Paint

Lab ID: 210603907

Client ID: A-035B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint	None Detected	None Detected	Mastic/Binder, Paint

Lab ID: 210603908

Client ID: A-035C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint	None Detected	None Detected	Mastic/Binder, Paint



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106039
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210603909

Client ID: A-036A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Yellow woven fibrous material with paint and debris	None Detected	Cellulose 50%	Binder/Filler, Paint

Lab ID: 210603910

Client ID: A-036B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Tan mastic with paint and debris	None Detected	None Detected	Mastic/Binder, Paint

Lab ID: 210603911

Client ID: A-036C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Soft grey sandy material with paint	None Detected	None Detected	Binder/Filler, Vermiculite, Paint

Lab ID: 210603912

Client ID: A-036D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106039
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210603913

Client ID: A-036E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210603914

Client ID: A-037A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark green flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of dark brown brittle mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210603915

Client ID: A-037B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark green flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of dark brown brittle mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210603916

Client ID: A-037C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark green flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106039
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210603917

Client ID: A-038A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic	None Detected	None Detected	Mastic/Binder
4.	White sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210603918

Client ID: A-038B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with debris	None Detected	None Detected	Mastic/Binder

Lab ID: 210603919

Client ID: A-038C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with debris	None Detected	None Detected	Mastic/Binder

Lab ID: 210603920

Client ID: A-039A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with debris	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106039
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210603921

Client ID: A-039B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with paint	None Detected	None Detected	Mastic/Binder, Paint

Lab ID: 210603922

Client ID: A-039C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with debris	None Detected	None Detected	Mastic/Binder

Analyzed by: Hanaa
Armanious

Signature:

Date: 04-20-2021

Reviewed by: Zubair Ahmed

Signature:

Date: 04-20-2021

*Total Layers Analyzed:60

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106040
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604001

Client ID: A-040A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of white compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210604002

Client ID: A-040B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of white compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210604003

Client ID: A-040C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of white compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210604004

Client ID: A-041A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106040
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604005

Client ID: A-041B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic	None Detected	Talc 2%	Mastic/Binder
4.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210604006

Client ID: A-041C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Light brown mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic	None Detected	Talc 2%	Mastic/Binder
4.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210604007

Client ID: A-042A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic	None Detected	Talc 2%	Mastic/Binder
4.	White compacted powdery material	None Detected	None Detected	Binder/Filler
5.	Trace of cream sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY



Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106040
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210604008

Client ID: A-042B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic	None Detected	Talc 2%	Mastic/Binder
4.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210604009

Client ID: A-042C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler
4.	Dark brown brittle mastic	None Detected	Talc 2%	Mastic/Binder

Lab ID: 210604010

Client ID: A-043A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint	None Detected	Talc 2%	Mastic/Binder, Paint



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106040
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604011

Client ID: A-043B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210604012

Client ID: A-043C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler
4.	Dark brown brittle mastic with paint	None Detected	Talc 2%	Mastic/Binder, Paint

Lab ID: 210604013

Client ID: A-044A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210604014

Client ID: A-044B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106040
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604015

Client ID: A-044C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210604016

Client ID: A-044D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210604017

Client ID: A-044E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210604018

Client ID: A-044F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210604019

Client ID: A-044G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106040
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604020

Client ID: A-045A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210604021

Client ID: A-045B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Trace of white compacted powdery material	None Detected	None Detected	JC/Binder
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210604022

Client ID: A-045C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210604023

Client ID: A-045D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210604024

Client ID: A-045E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106040
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604025

Client ID: A-045F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream textured paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey fibrous chalky material	None Detected	Cellulose 6%	Gypsum/Binder

Analyzed by: Calvin Nguyen

Signature: 

Date: 04-20-2021


Reviewed by: Vivian Le

Signature: 

Date: 04-20-2021

*Total Layers Analyzed: 69

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.

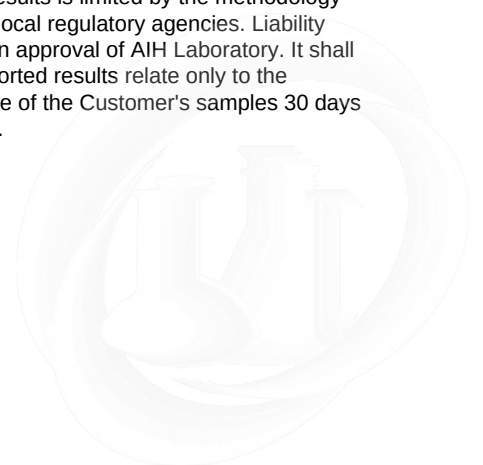



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106041
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210604101

Client ID: A-045G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	Yellow woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
3.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210604102

Client ID: A-046A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
2.	Dark brown brittle mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210604103

Client ID: A-046B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream compressed fibrous material with paint	None Detected	Cellulose 60%, Glass Fibers 20%, Mineral Wool 2%	Binder/Filler, Perlite, Paint
2.	Dark brown brittle mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of white compacted powdery material with paint	None Detected	Cellulose 2%	Binder/Filler, Paint

Lab ID: 210604104

Client ID: A-046C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
2.	Dark brown brittle mastic	None Detected	None Detected	Mastic/Binder
3.	White sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106041
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604105

Client ID: A-046D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
2.	Dark brown brittle mastic	None Detected	None Detected	Mastic/Binder
3.	White sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210604106

Client ID: A-046E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream compressed fibrous material with paint	None Detected	Cellulose 60%, Glass Fibers 20%, Mineral Wool 2%	Binder/Filler, Perlite, Paint
2.	Dark brown brittle mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210604107

Client ID: A-046F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream compressed fibrous material with paint	None Detected	Cellulose 60%, Glass Fibers 20%, Mineral Wool 2%	Binder/Filler, Perlite, Paint
2.	Dark brown brittle mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210604108

Client ID: A-046G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
2.	Dark brown brittle mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106041
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604109

Client ID: A-047A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan/beige mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint	None Detected	Talc 2%	Mastic/Binder, Paint

Lab ID: 210604110

Client ID: A-047B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan/beige mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint	None Detected	Talc 2%	Mastic/Binder, Paint

Lab ID: 210604111

Client ID: A-047C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan/beige mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint	None Detected	Talc 2%	Mastic/Binder, Paint

Lab ID: 210604112

Client ID: A-047D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan/beige mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint	None Detected	Talc 2%	Mastic/Binder, Paint



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106041
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604113

Client ID: A-047E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan/beige mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic with paint	None Detected	Talc 2%	Mastic/Binder, Paint

Lab ID: 210604114

Client ID: A-048A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan/beige mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic	None Detected	Talc 2%	Mastic/Binder
4.	Trace of white compacted powdery material with paint	None Detected	Cellulose 2%	Binder/Filler, Paint

Lab ID: 210604115

Client ID: A-048B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan/beige mastic with paint	None Detected	None Detected	Mastic/Binder, Paint





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106041
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210604116

Client ID: A-048C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Dark blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan/beige mastic	None Detected	None Detected	Mastic/Binder
3.	Dark brown brittle mastic	None Detected	Talc 2%	Mastic/Binder
4.	White compacted powdery material with paint	None Detected	Cellulose 2%	Binder/Filler, Paint
5.	white sandy material	None Detected	Cellulose 1%	Binder/Filler, Mineral Grains

Lab ID: 210604117

Client ID: A-049A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream compressed fibrous material with paint	None Detected	Cellulose 60%, Mineral Wool 15%, Glass Fibers 10%	Binder/Filler, Perlite, Paint

Lab ID: 210604118

Client ID: A-049B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream compressed fibrous material with paint	None Detected	Cellulose 60%, Mineral Wool 15%, Glass Fibers 10%	Binder/Filler, Perlite, Paint

Lab ID: 210604119

Client ID: A-049C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream compressed fibrous material with paint	None Detected	Cellulose 60%, Mineral Wool 15%, Glass Fibers 10%	Binder/Filler, Perlite, Paint

Lab ID: 210604120

Client ID: A-049D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream compressed fibrous material with paint	None Detected	Cellulose 60%, Mineral Wool 15%, Glass Fibers 10%	Binder/Filler, Perlite, Paint



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106041
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604121

Client ID: A-049E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream compressed fibrous material with paint	None Detected	Cellulose 60%, Mineral Wool 15%, Glass Fibers 10%	Binder/Filler, Perlite, Paint

Lab ID: 210604122

Client ID: A-049F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream compressed fibrous material with paint	None Detected	Cellulose 60%, Mineral Wool 15%, Glass Fibers 10%	Binder/Filler, Perlite, Paint

Lab ID: 210604123

Client ID: A-049G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream compressed fibrous material with paint	None Detected	Cellulose 60%, Mineral Wool 15%, Glass Fibers 10%	Binder/Filler, Perlite, Paint

Lab ID: 210604124

Client ID: A-050A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White powdery material with paint	None Detected	None Detected	Binder/Filler
2.	Tan compressed fibrous material	None Detected	Glass Fibers 85%	Binder/Filler

Lab ID: 210604125

Client ID: A-050B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White powdery material with paint	None Detected	None Detected	Binder/Filler
2.	Tan compressed fibrous material	None Detected	Glass Fibers 85%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106041
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Manar Ahmad

Signature: 

Date: 04-20-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 04-20-2021

*Total Layers Analyzed: 57

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106042
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604201

Client ID: A-050C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White powdery material with paint	None Detected	None Detected	Binder/Filler
2.	Tan compressed fibrous material	None Detected	Glass Fibers 85%	Binder/Filler

Lab ID: 210604202

Client ID: A-050D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White powdery material with paint	None Detected	None Detected	Binder/Filler
2.	Tan compressed fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
3.	Brown mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210604203

Client ID: A-050E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White powdery material with paint	None Detected	None Detected	Binder/Filler
2.	Tan compressed fibrous material	None Detected	Glass Fibers 85%	Binder/Filler

Lab ID: 210604204

Client ID: A-050F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White powdery material with paint	None Detected	None Detected	Binder/Filler
2.	Tan compressed fibrous material	None Detected	Glass Fibers 85%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106042
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604205

Client ID: A-050G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White powdery material with paint	None Detected	None Detected	Binder/Filler
2.	Tan compressed fibrous material	None Detected	Glass Fibers 85%	Binder/Filler

Lab ID: 210604206

Client ID: A-051A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604207

Client ID: A-051B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604208

Client ID: A-051C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604209

Client ID: A-051D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604210

Client ID: A-051E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106042
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210604211

Client ID: A-051F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604212

Client ID: A-051G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604213

Client ID: A-052A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604214

Client ID: A-052B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604215

Client ID: A-052C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with coating	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604216

Client ID: A-052D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106042
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604217

Client ID: A-052E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604218

Client ID: A-052F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604219

Client ID: A-052G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Lab ID: 210604220

Client ID: A-053A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 40%	Binder/Filler

Lab ID: 210604221

Client ID: A-053B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 40%	Binder/Filler

Lab ID: 210604222

Client ID: A-053C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 40%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106042
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604223

Client ID: A-054A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with coating	None Detected	Cellulose 40%, Mineral Wool 40%	Binder/Filler, Perlite

Analyzed by: Vivian Le

Signature: 

Date: 04-20-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 04-20-2021

*Total Layers Analyzed: 29

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106043
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604301

Client ID: A-054B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Silver metal foil with paint	None Detected	None Detected	Binder/Filler, Metal
2.	Grey compressed fibrous material	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Perlite

Lab ID: 210604302

Client ID: A-054C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Silver metal foil with paint	None Detected	None Detected	Binder/Filler, Metal
2.	Grey compressed fibrous material	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Perlite

Lab ID: 210604303

Client ID: A-054D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Silver metal foil with paint	None Detected	None Detected	Binder/Filler, Metal
2.	Grey compressed fibrous material	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Perlite

Lab ID: 210604304

Client ID: A-054E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Silver metal foil with paint	None Detected	None Detected	Binder/Filler, Metal
2.	Grey compressed fibrous material	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Perlite

Lab ID: 210604305

Client ID: A-055A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White textured paint with paper	None Detected	Cellulose 4%	Binder/Filler, Paint
2.	White chalky material with paper	None Detected	Cellulose 7%, Glass Fibers 2%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106043
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604306

Client ID: A-055B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White textured paint with paper	None Detected	Cellulose 4%	Binder/Filler, Paint
2.	White chalky material with paper	None Detected	Cellulose 7%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210604307

Client ID: A-055C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White textured paint with paper	None Detected	Cellulose 4%	Binder/Filler, Paint
2.	White chalky material with paper	None Detected	Cellulose 7%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210604308

Client ID: A-056A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Paint, Perlite

Lab ID: 210604309

Client ID: A-056B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Paint, Perlite
2.	White compacted powdery material	None Detected	Cellulose 2%, Mineral Wool 2%	Binder/Filler

Lab ID: 210604310

Client ID: A-056C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Paint, Perlite
2.	White compacted powdery material	None Detected	Cellulose 2%, Mineral Wool 2%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106043
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604311

Client ID: A-057A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White plastic sheet	None Detected	None Detected	Binder/Filler
2.	Yellow mastic	None Detected	Cellulose 2%, Mineral Wool 2%	Mastic/Binder
3.	Grey compressed fibrous material	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Perlite
4.	White compacted powdery material	None Detected	Cellulose 2%, Mineral Wool 2%	Binder/Filler
5.	Cream mastic	None Detected	Cellulose 2%, Mineral Wool 2%	Mastic/Binder

Lab ID: 210604312

Client ID: A-057B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White plastic sheet	None Detected	None Detected	Binder/Filler
2.	Yellow mastic	None Detected	Cellulose 2%, Mineral Wool 2%	Mastic/Binder
3.	Grey compressed fibrous material	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Perlite
4.	White compacted powdery material	None Detected	Cellulose 2%, Mineral Wool 2%	Binder/Filler
5.	Trace of cream mastic	None Detected	Cellulose 2%, Mineral Wool 2%	Mastic/Binder

Lab ID: 210604313

Client ID: A-057C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White plastic sheet	None Detected	None Detected	Binder/Filler
2.	Yellow mastic	None Detected	Cellulose 2%, Mineral Wool 2%	Mastic/Binder
3.	Grey compressed fibrous material	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Perlite
4.	White compacted powdery material	None Detected	Cellulose 2%, Mineral Wool 2%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106043
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604314

Client ID: A-058A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Paint, Perlite
2.	White compacted powdery material	None Detected	Cellulose 2%, Mineral Wool 2%	Binder/Filler

Lab ID: 210604315

Client ID: A-058B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Paint, Perlite

Lab ID: 210604316

Client ID: A-058C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 30%	Binder/Filler, Paint, Perlite

Lab ID: 210604317

Client ID: A-059A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Off-white chalky material with trace of paint	None Detected	None Detected	Binder/Filler, Vermiculite

Lab ID: 210604318

Client ID: A-059B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey chalky material with trace of paint	None Detected	None Detected	Binder/Filler, Vermiculite

Lab ID: 210604319

Client ID: A-059C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey fibrous chalky material with trace of paint	None Detected	Cellulose 10%	Binder/Filler, Vermiculite



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106043
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210604320

Client ID: A-059D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey chalky material	None Detected	Cellulose 2%	Binder/Filler, Vermiculite

Lab ID: 210604321

Client ID: A-059E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White chalky material	None Detected	Cellulose 2%	Binder/Filler, Vermiculite

Lab ID: 210604322

Client ID: A-059F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White chalky material	None Detected	Cellulose 2%	Binder/Filler, Vermiculite

Lab ID: 210604323

Client ID: A-059G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White chalky material	None Detected	Cellulose 2%	Binder/Filler, Vermiculite

Lab ID: 210604324

Client ID: A-060A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material	None Detected	Cellulose 80%	Binder/Filler
2.	Yellow/tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536


Lab Batch Number: 2106043
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210604325

Client ID: A-060B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material	None Detected	Cellulose 80%	Binder/Filler
2.	Trace of grey loose fibrous material	Chrysotile 8%	Mineral Wool 10%, Cellulose 2%	Binder/Filler
3.	Yellow/tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Analyzed by: Cameron Zimmerman

Signature: 

Date: 04-20-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 04-20-2021

*Total Layers Analyzed: 49

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106044
Samples Submitted: 14
Samples Analyzed: 14
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604401

Client ID: A-060C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material	None Detected	Cellulose 70%	Binder/Filler
2.	Tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210604402

Client ID: A-060D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material	None Detected	Cellulose 70%	Binder/Filler
2.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210604403

Client ID: A-060E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material	None Detected	Cellulose 70%	Binder/Filler
2.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler
3.	Grey loose fibrous material	Chrysotile 12%	Cellulose 2%	Binder/Filler

Lab ID: 210604404

Client ID: A-061A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210604405

Client ID: A-061B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106044
Samples Submitted: 14
Samples Analyzed: 14
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210604406

Client ID: A-061C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210604407

Client ID: A-061D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210604408

Client ID: A-061E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210604409

Client ID: A-062A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material	None Detected	Cellulose 70%	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210604410

Client ID: A-062B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material	None Detected	Cellulose 70%	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106044
Samples Submitted: 14
Samples Analyzed: 14
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210604411

Client ID: A-062C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material	None Detected	Cellulose 70%	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210604412

Client ID: A-063A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material with coating	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210604413

Client ID: A-063B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material with coating	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210604414

Client ID: A-063C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material with coating	None Detected	Mineral Wool 90%	Binder/Filler





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106044
Samples Submitted: 14
Samples Analyzed: 14
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Calvin Nguyen

Signature: 

Date: 04-20-2021

Reviewed by: Vivian Le

Signature: 

Date: 04-20-2021

*Total Layers Analyzed: 21

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106149
Samples Submitted: 17
Samples Analyzed: 17
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210614901

Client ID: A-064A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210614902

Client ID: A-064B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210614903

Client ID: A-064C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210614904

Client ID: A-064D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Black asphaltic powdery material	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Lab ID: 210614905

Client ID: A-064E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210614906

Client ID: A-065A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106149
Samples Submitted: 17
Samples Analyzed: 17
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210614907

Client ID: A-065B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210614908

Client ID: A-065C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210614909

Client ID: A-065D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210614910

Client ID: A-065E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210614911

Client ID: A-066A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream chalky material with paint	None Detected	None Detected	Binder/Filler, Vermiculite



BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106149
Samples Submitted: 17
Samples Analyzed: 17
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210614912

Client ID: A-066B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream chalky material with paint	None Detected	None Detected	Binder/Filler, Vermiculite

Lab ID: 210614913

Client ID: A-066C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream chalky material with paint	None Detected	None Detected	Binder/Filler, Vermiculite

Lab ID: 210614914

Client ID: A-066D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey chalky material with paint	Chrysotile 7%	None Detected	Binder/Filler, Vermiculite

Lab ID: 210614915

Client ID: A-066E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey chalky material with paint	Chrysotile 7%	None Detected	Binder/Filler, Vermiculite

Lab ID: 210614916

Client ID: A-067A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and paper	None Detected	Cellulose 55%, Cellulose 5%	Binder/Filler
2.	Yellow loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210614917

Client ID: A-067B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and paper	None Detected	Cellulose 55%, Cellulose 5%	Binder/Filler
2.	Yellow/tan loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106149
Samples Submitted: 17
Samples Analyzed: 17
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Calvin Nguyen

Signature: 

Date: 04-22-2021

Reviewed by: Vivian Le

Signature: 

Date: 04-22-2021

*Total Layers Analyzed: 24

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106150
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615001

Client ID: A-067C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and paper	None Detected	Glass Fibers 85%	Binder/Filler, Metal
2.	Yellow loose fibrous material	None Detected	Glass Fibers 5%, Mineral Wool 80%	Binder/Filler

Lab ID: 210615002

Client ID: A-068A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan woven fibrous material	None Detected	Cellulose	Binder/Filler
2.	White fibrous powdery material	Chrysotile 5%, Amosite 5%	None Detected	Binder/Filler

Lab ID: 210615003

Client ID: A-068B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan woven fibrous material	None Detected	Cellulose	Binder/Filler
2.	White fibrous powdery material	Chrysotile 5%, Amosite 5%	None Detected	Binder/Filler

Lab ID: 210615004

Client ID: A-068C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan woven fibrous material	None Detected	Cellulose	Binder/Filler
2.	White fibrous powdery material	Chrysotile 5%, Amosite 5%	None Detected	Binder/Filler

Lab ID: 210615005

Client ID: A-069A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
2.	White loose fibrous material	None Detected	Glass Fibers 10%, Mineral Wool 75%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106150
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615006

Client ID: A-069B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
2.	White loose fibrous material	None Detected	Glass Fibers 10%, Mineral Wool 75%	Binder/Filler

Lab ID: 210615007

Client ID: A-069C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
2.	White loose fibrous material	None Detected	Glass Fibers 10%, Mineral Wool 75%	Binder/Filler

Lab ID: 210615008

Client ID: A-070A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material with coating	None Detected	Cellulose 85%	Binder/Filler
2.	White fibrous powdery material	Chrysotile 5%, Amosite 5%	None Detected	Binder/Filler
3.	Peach loose fibrous material	None Detected	Glass Fibers 10%, Mineral Wool 75%	Binder/Filler

Lab ID: 210615009

Client ID: A-070B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material with coating	None Detected	Cellulose 85%	Binder/Filler
2.	White fibrous powdery material	Chrysotile 5%, Amosite 5%	None Detected	Binder/Filler
3.	Peach loose fibrous material	None Detected	Glass Fibers 10%, Mineral Wool 75%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106150
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615010

Client ID: A-070C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material with coating	None Detected	Cellulose 85%	Binder/Filler
2.	White fibrous powdery material	Chrysotile 5%, Amosite 5%	None Detected	Binder/Filler
3.	Peach loose fibrous material	None Detected	Glass Fibers 10%, Mineral Wool 75%	Binder/Filler

Lab ID: 210615011

Client ID: A-071A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material with coating	None Detected	Cellulose 85%	Binder/Filler
2.	Yellow loose fibrous material	None Detected	Glass Fibers 5%, Mineral Wool 80%	Binder/Filler
3.	Grey compressed fibrous material	None Detected	Cellulose 3%, Glass Fibers 12%, Mineral Wool 70%	Binder/Filler
4.	White fibrous powdery material	Chrysotile 5%, Amosite 5%	None Detected	Binder/Filler

Lab ID: 210615012

Client ID: A-071B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material with coating	None Detected	Cellulose 85%	Binder/Filler
2.	Yellow loose fibrous material	None Detected	Glass Fibers 5%, Mineral Wool 80%	Binder/Filler
3.	Grey compressed fibrous material	None Detected	Cellulose 3%, Glass Fibers 12%, Mineral Wool 70%	Binder/Filler
4.	White fibrous powdery material	Chrysotile 5%, Amosite 5%	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106150
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615013

Client ID: A-071C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material with coating	None Detected	Cellulose 85%	Binder/Filler
2.	Yellow loose fibrous material	None Detected	Glass Fibers 5%, Mineral Wool 80%	Binder/Filler
3.	Grey compressed fibrous material	None Detected	Cellulose 3%, Glass Fibers 12%, Mineral Wool 70%	Binder/Filler
4.	White fibrous powdery material	Chrysotile 5%, Amosite 5%	None Detected	Binder/Filler

Lab ID: 210615014

Client ID: A-072A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic material	None Detected	None Detected	Asphalt/Binder
2.	Pink loose fibrous material	None Detected	Glass Fibers 5%, Mineral Wool 80%	Binder/Filler

Lab ID: 210615015

Client ID: A-072B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic material	None Detected	None Detected	Asphalt/Binder
2.	Pink loose fibrous material	None Detected	Glass Fibers 5%, Mineral Wool 80%	Binder/Filler

Lab ID: 210615016

Client ID: A-072C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic material	None Detected	Cellulose 2%	Asphalt/Binder
2.	Black loose fibrous material	None Detected	Glass Fibers 10%, Mineral Wool 75%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106150
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615017

Client ID: A-073A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615018

Client ID: A-073B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615019

Client ID: A-073C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615020

Client ID: A-074A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White coating	None Detected	None Detected	Binder/Filler
2.	White woven fibrous material	None Detected	Cellulose 85%	Binder/Filler

Lab ID: 210615021

Client ID: A-074B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White coating	None Detected	None Detected	Binder/Filler
2.	White woven fibrous material	None Detected	Cellulose 85%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106150
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210615022

Client ID: A-074C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White coating	None Detected	None Detected	Binder/Filler
2.	White woven fibrous material	None Detected	Cellulose 85%	Binder/Filler

Lab ID: 210615023

Client ID: A-075A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615024

Client ID: A-075B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615025

Client ID: A-075C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY



Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106150
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615026

Client ID: A-076A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White coating	None Detected	None Detected	Binder/Filler
2.	Multi-layered black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains
3.	Yellow foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam
4.	Black fibrous asphaltic material	None Detected	Cellulose 15%	Asphalt/Binder
5.	Black fibrous asphaltic material	None Detected	Glass Fibers 3%, Synthetic Fibers 12%	Asphalt/Binder

Lab ID: 210615027

Client ID: A-076B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White coating	None Detected	None Detected	Binder/Filler
2.	Multi-layered black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains
3.	Yellow foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam
4.	Black fibrous asphaltic material	None Detected	Cellulose 15%	Asphalt/Binder
5.	Black fibrous asphaltic material	None Detected	Glass Fibers 3%, Synthetic Fibers 12%	Asphalt/Binder





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106150
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Don Nguyen

Signature: 

Date: 04-21-2021

Reviewed by: Vivian Le

Signature: 

Date: 04-21-2021

*Total Layers Analyzed: 66

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106151
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210615101

Client ID: A-076C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black multilayered fibrous asphaltic material with granules and white coating	None Detected	Glass Fibers 20%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder
3.	Yellow foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam
4.	Off-white chalky material	None Detected	None Detected	Binder/Filler, Vermiculite
5.	Black asphaltic material	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615102

Client ID: A-076D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black multilayered fibrous asphaltic material with granules and white coating	None Detected	Glass Fibers 20%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder
3.	Yellow foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam
4.	Off-white chalky material	None Detected	None Detected	Binder/Filler, Vermiculite
5.	Black asphaltic material	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615103

Client ID: A-076E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black multilayered fibrous asphaltic material with granules and white coating	None Detected	Glass Fibers 20%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder
3.	Yellow foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam
4.	Off-white chalky material	None Detected	None Detected	Binder/Filler, Vermiculite
5.	Black asphaltic material	None Detected	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106151
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615104

Client ID: A-076F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black multilayered fibrous asphaltic material with granules and white coating	None Detected	Glass Fibers 20%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder
3.	Yellow foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam
4.	Off-white chalky material	None Detected	None Detected	Binder/Filler, Vermiculite
5.	Black asphaltic material	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615105

Client ID: A-076G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black multilayered fibrous asphaltic material with granules and white coating	None Detected	Glass Fibers 20%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder
3.	Yellow foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam
4.	Off-white chalky material	None Detected	None Detected	Binder/Filler, Vermiculite
5.	Black asphaltic material	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615106

Client ID: A-077A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige rubbery material	None Detected	None Detected	Binder/Filler
2.	Black asphaltic material	None Detected	Cellulose 2%	Asphalt/Binder
3.	White/silver rubbery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic material with trace of silver paint	None Detected	Cellulose 2%	Asphalt/Binder, Paint
5.	Silver putty	None Detected	None Detected	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106151
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210615108

Client ID: A-077B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material	None Detected	None Detected	Binder/Filler
2.	Black asphaltic material	None Detected	Cellulose <1%	Asphalt/Binder
3.	Grey/white rubbery material with trace of silver paint	None Detected	None Detected	Binder/Filler, Paint
4.	Trace of black asphaltic material	None Detected	Cellulose <1%	Asphalt/Binder

Lab ID: 210615109

Client ID: A-077C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material with silver paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey/white rubbery material	None Detected	None Detected	Binder/Filler
3.	Cream rubbery material	None Detected	None Detected	Binder/Filler
4.	Trace of black/brown asphaltic material	None Detected	Cellulose <1%	Asphalt/Binder
5.	Silver putty	None Detected	None Detected	Binder/Filler

Lab ID: 210615111

Client ID: A-077D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White/cream rubbery material with silver paint	None Detected	None Detected	Binder/Filler
2.	Black asphaltic material	None Detected	Cellulose <1%	Asphalt/Binder
3.	Silver putty	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106151
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615112

Client ID: A-077E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White/grey rubbery material with silver paint	None Detected	None Detected	Binder/Filler
2.	Black asphaltic material	None Detected	Cellulose <1%	Asphalt/Binder
3.	Silver putty	None Detected	None Detected	Binder/Filler

Lab ID: 210615113

Client ID: A-078A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream/silver rubbery material with paint	None Detected	Synthetic Fibers 5%	Binder/Filler

Lab ID: 210615114

Client ID: A-078B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey/white rubbery material with paint	None Detected	None Detected	Binder/Filler, Vermiculite

Lab ID: 210615115

Client ID: A-078C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey/white rubbery material with paint	None Detected	None Detected	Binder/Filler, Vermiculite

Lab ID: 210615116

Client ID: A-079A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black rubbery material with trace of tan coating	None Detected	None Detected	Binder/Filler

Lab ID: 210615117

Client ID: A-079B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black rubbery material with trace of cream coating	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106151
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210615118

Client ID: A-079C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black rubbery material with trace of cream coating	None Detected	None Detected	Binder/Filler

Lab ID: 210615119

Client ID: A-080A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Silver metal foil	None Detected	None Detected	Binder/Filler, Metal
2.	Trace of white woven fibrous material	None Detected	Glass Fibers 80%	Binder/Filler
3.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210615120

Client ID: A-080B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Silver metal foil	None Detected	None Detected	Binder/Filler, Metal
2.	Yellow woven fibrous material	None Detected	Glass Fibers 80%	Binder/Filler
3.	Yellow mastic	None Detected	Cellulose 2%	Mastic/Binder
4.	White fibrous paper	None Detected	Cellulose 90%	Binder/Filler
5.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler
6.	Tan fibrous paper	None Detected	Cellulose 90%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106151
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210615121

Client ID: A-080C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Silver metal foil	None Detected	None Detected	Binder/Filler, Metal
2.	Yellow/tan woven fibrous material	None Detected	Glass Fibers 80%	Binder/Filler
3.	Brown mastic	None Detected	Cellulose 2%	Mastic/Binder
4.	White fibrous paper	None Detected	Cellulose 90%	Binder/Filler
5.	White loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler
6.	Yellow/tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler
7.	Brown fibrous paper	None Detected	Cellulose 90%	Binder/Filler
8.	Trace of brown mastic	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210615122

Client ID: A-081A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream rubbery material	None Detected	None Detected	Binder/Filler
3.	Tan woven fibrous material	None Detected	Synthetic Fibers 80%	Binder/Filler
4.	Black rubbery material	None Detected	None Detected	Binder/Filler
5.	White mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106151
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210615123

Client ID: A-081B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan woven fibrous material	None Detected	Synthetic Fibers 80%	Binder/Filler
3.	Tan/black rubbery material	None Detected	None Detected	Binder/Filler
4.	White mastic	None Detected	Cellulose 90%	Mastic/Binder
5.	Tan fibrous material	None Detected	Cellulose 90%	Binder/Filler

Lab ID: 210615124

Client ID: A-081C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White/silver rubbery material with paint	None Detected	None Detected	Binder/Filler
2.	Cream rubbery material	None Detected	None Detected	Binder/Filler
3.	Tan woven fibrous material	None Detected	Synthetic Fibers 80%	Binder/Filler
4.	Black rubbery material	None Detected	None Detected	Binder/Filler
5.	White mastic	None Detected	None Detected	Mastic/Binder
6.	Black fibrous asphaltic material	None Detected	Glass Fibers 10%	Asphalt/Binder

Lab ID: 210615125

Client ID: A-082A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic built-up material with granules	None Detected	Synthetic Fibers 20%	Asphalt/Binder, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106151
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615126

Client ID: A-082B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic built-up material with granules	None Detected	Synthetic Fibers 20%	Asphalt/Binder, Mineral Grains

Lab ID: 210615127

Client ID: A-082C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic built-up material with granules	None Detected	Synthetic Fibers 20%	Asphalt/Binder, Mineral Grains

Analyzed by: Cameron Zimmerman

Signature:

Date: 04-22-2021

Reviewed by: Zubair Ahmed

Signature:

Date: 04-22-2021

*Total Layers Analyzed:87

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106153
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210615301

Client ID: A-083A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615302

Client ID: A-083B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615303

Client ID: A-083C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615304

Client ID: A-084A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Red rubbery material	None Detected	None Detected	Binder/Filler

Lab ID: 210615305

Client ID: A-084B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Red rubbery material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106153
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210615306

Client ID: A-084C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Red rubbery material	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210615307

Client ID: A-085A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material	None Detected	None Detected	Binder/Filler
2.	Silver metal foil	None Detected	None Detected	Binder/Filler, Metal
3.	White mastic	None Detected	None Detected	Mastic/Binder
4.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
5.	Cream fibrous paper	None Detected	Cellulose 85%	Binder/Filler
6.	Trace of tan mastic	None Detected	None Detected	Mastic/Binder
7.	Pink/beige loose fibrous material	None Detected	Glass Fibers 85%	Binder/Filler





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106153
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615308

Client ID: A-085B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material	None Detected	None Detected	Binder/Filler
2.	Silver metal foil	None Detected	None Detected	Binder/Filler, Metal
3.	White mastic	None Detected	None Detected	Mastic/Binder
4.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
5.	Silver metal foil	None Detected	None Detected	Binder/Filler, Metal
6.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
7.	Brown/beige loose fibrous material	None Detected	Glass Fibers 85%	Binder/Filler

Lab ID: 210615309

Client ID: A-085C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material	None Detected	None Detected	Binder/Filler
2.	Silver metal foil	None Detected	None Detected	Binder/Filler, Metal
3.	White mastic	None Detected	None Detected	Mastic/Binder
4.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
5.	Silver metal foil	None Detected	None Detected	Binder/Filler, Metal
6.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
7.	Brown/beige loose fibrous material	None Detected	Glass Fibers 85%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106153
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615310

Client ID: A-086A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Dark grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615311

Client ID: A-086B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Dark grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615312

Client ID: A-086C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Dark grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615313

Client ID: A-086D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Peach sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615314

Client ID: A-086E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Dark grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106153
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615315

Client ID: A-086F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Peach sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615316

Client ID: A-086G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Dark grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615317

Client ID: A-087A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Dark grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615318

Client ID: A-087B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Dark grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615319

Client ID: A-087C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Dark grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106153
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210615320

Client ID: A-087D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Dark grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615321

Client ID: A-087E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint

Lab ID: 210615322

Client ID: A-087F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint

Lab ID: 210615323

Client ID: A-087G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Dark grey sandy material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615324

Client ID: A-088A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey/beige hard cementitious material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615325

Client ID: A-088B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey/beige hard cementitious material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106153
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615326

Client ID: A-088C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey/beige hard cementitious material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Lab ID: 210615327

Client ID: A-088D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey/beige hard cementitious material	None Detected	Cellulose <1%	Binder/Filler, Mineral Grains

Analyzed by: Manar Ahmad

Signature: 

Date: 04-22-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 04-22-2021

*Total Layers Analyzed:61

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106154
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615401

Client ID: A-088E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint

Lab ID: 210615402

Client ID: A-088F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint

Lab ID: 210615403

Client ID: A-088G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint

Lab ID: 210615404

Client ID: A-089A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint

Lab ID: 210615405

Client ID: A-089B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint

Lab ID: 210615406

Client ID: A-089C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	Cellulose <1%	Binder/Filler, Paint
2.	Light grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	White/silver rubbery material	None Detected	Glass Fibers 3%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106154
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210615407

Client ID: A-090A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White/cream woven fibrous material with paint	None Detected	Cellulose 85%	Binder/Filler, Paint
2.	Black asphaltic mastic with silver foil	None Detected	None Detected	Asphalt/Binder, Metal
3.	Grey fibrous material	Chrysotile 10%	Mineral Wool 80%	Binder/Filler
4.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210615408

Client ID: A-090B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream woven fibrous material with paint	None Detected	Cellulose 85%	Binder/Filler, Paint
2.	Black asphaltic mastic with silver foil	None Detected	None Detected	Asphalt/Binder, Metal
3.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210615409

Client ID: A-090C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White/cream woven fibrous material with paint	None Detected	Cellulose 85%	Binder/Filler, Paint
2.	Grey fibrous material	Chrysotile 10%	Mineral Wool 80%	Binder/Filler

Lab ID: 210615410

Client ID: A-091A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
2.	White loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106154
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615411

Client ID: A-091B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
2.	White loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210615412

Client ID: A-091C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
2.	White loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210615413

Client ID: A-092A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with coating	Chrysotile 5%	Glass Fibers 85%	Binder/Filler
2.	Grey loose fibrous material	Chrysotile 10%	Mineral Wool 80%	Binder/Filler
3.	White loose fibrous material with coating	None Detected	Mineral Wool 90%	Binder/Filler
4.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Comments: Layer 1 possible contamination from another source

Lab ID: 210615414

Client ID: A-092B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with coating	Chrysotile 5%	Glass Fibers 85%	Binder/Filler
2.	Grey loose fibrous material	Chrysotile 10%	Mineral Wool 80%	Binder/Filler
3.	White compressed fibrous material	None Detected	Mineral Wool 90%	Binder/Filler
4.	Pink loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Comments: Layer 1 possible contamination from another source



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536-7618

Lab Batch Number: 2106154
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210615415

Client ID: A-092C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with coating	Chrysotile 5%	Glass Fibers 85%	Binder/Filler
2.	Grey loose fibrous material	Chrysotile 10%	Mineral Wool 80%	Binder/Filler
3.	White loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Comments: Layer 1 possible contamination from another source

Lab ID: 210615416

Client ID: A-093A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210615417

Client ID: A-093B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210615418

Client ID: A-093C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536-7618

Lab Batch Number: 2106154
Samples Submitted: 18
Samples Analyzed: 18
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Hanaa
Armanious

Signature: 

Date: 04-21-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 04-21-2021

*Total Layers Analyzed: 37

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106960
Samples Submitted: 10
Samples Analyzed: 10
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696001

Client ID: A-094A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696002

Client ID: A-094B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696003

Client ID: A-094C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696004

Client ID: A-095A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696005

Client ID: A-095B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106960
Samples Submitted: 10
Samples Analyzed: 10
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696006

Client ID: A-095C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696007

Client ID: A-096A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696008

Client ID: A-096B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696009

Client ID: A-096C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696010

Client ID: A-097A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder
2.	White compacted powdery material	None Detected	None Detected	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106960
Samples Submitted: 10
Samples Analyzed: 10
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Hanaa
Armanious

Signature: 

Date: 05-06-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 20

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106961
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696101

Client ID: A-097B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696102

Client ID: A-097C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696103

Client ID: A-098A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696104

Client ID: A-098B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696105

Client ID: A-098C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106961
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696106

Client ID: A-099A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Clear adhesive with debris	None Detected	None Detected	Mastic/Binder, Fine Particles

Lab ID: 210696107

Client ID: A-099B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696108

Client ID: A-099C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696109

Client ID: A-100A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains, Paint

Lab ID: 210696110

Client ID: A-100B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains, Paint



BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106961
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696111

Client ID: A-100C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains, Paint

Lab ID: 210696112

Client ID: A-101A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Beige mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696113

Client ID: A-101B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Trace of beige mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696114

Client ID: A-101C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Clear mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696115

Client ID: A-102A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	White compacted powdery material with paper	None Detected	Cellulose 2%	JC/Binder
3.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106961
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696116

Client ID: A-102B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
3.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696117

Client ID: A-102C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696118

Client ID: A-102D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696119

Client ID: A-102E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696120

Client ID: A-103A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White lumpy foamy material	None Detected	Cellulose <1%	Binder/Filler, Synthetic Foam



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201

www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106961
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696121

Client ID: A-103B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White lumpy foamy material	None Detected	Cellulose <1%	Binder/Filler, Synthetic Foam

Lab ID: 210696122

Client ID: A-103C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White lumpy foamy material	None Detected	Cellulose <1%	Binder/Filler, Synthetic Foam

Analyzed by: Hanaa Armanious

Signature:

Date: 05-06-2021

Reviewed by: Zubair Ahmed

Signature:

Date: 05-06-2021

*Total Layers Analyzed: 39

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106963
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696301

Client ID: A-103D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White lumpy foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam

Lab ID: 210696302

Client ID: A-103E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White lumpy foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam

Lab ID: 210696303

Client ID: A-104A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with paint and debris	None Detected	None Detected	Mastic/Binder, Paint

Lab ID: 210696304

Client ID: A-104B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with paint and debris	None Detected	None Detected	Mastic/Binder, Paint

Lab ID: 210696305

Client ID: A-104C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with paint and debris	None Detected	None Detected	Mastic/Binder, Paint



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106963
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696306

Client ID: A-105A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sandy material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder

Lab ID: 210696307

Client ID: A-105B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sandy material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder

Lab ID: 210696308

Client ID: A-105C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sandy material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder

Lab ID: 210696309

Client ID: A-105D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sandy material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106963
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696310

Client ID: A-105E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sandy material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder

Lab ID: 210696311

Client ID: A-106A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696312

Client ID: A-106B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696313

Client ID: A-106C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696314

Client ID: A-107A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with black granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106963
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696315

Client ID: A-107B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with black granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder

Lab ID: 210696316

Client ID: A-107C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with black granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic material with white/grey granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
4.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder

Lab ID: 210696317

Client ID: A-107D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with black granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic material with white/grey granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
4.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106963
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696318

Client ID: A-107E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with black granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic material with white/grey granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
4.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder

Lab ID: 210696319

Client ID: A-108A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696320

Client ID: A-108B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696321

Client ID: A-108C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	Cellulose 2%	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106963
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696322

Client ID: A-109A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696323

Client ID: A-109B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696324

Client ID: A-109C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material	None Detected	None Detected	Binder/Filler, Mineral Grains

Analyzed by: Hanaa Armanious

Signature:

Date: 05-06-2021

Reviewed by: Zubair Ahmed

Signature:

Date: 05-06-2021

*Total Layers Analyzed: 53

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106965
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696501

Client ID: A-109D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696502

Client ID: A-109E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696503

Client ID: A-110A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696504

Client ID: A-110B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White/tan chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696505

Client ID: A-110C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106965
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696506

Client ID: A-111A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210696507

Client ID: A-111B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210696508

Client ID: A-111C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210696509

Client ID: A-112A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210696510

Client ID: A-112B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210696511

Client ID: A-112C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106965
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696512

Client ID: A-112D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210696513

Client ID: A-112E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210696514

Client ID: A-113A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow/tan loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210696515

Client ID: A-113B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210696516

Client ID: A-113C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow/tan loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210696517

Client ID: A-113D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106965
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696518

Client ID: A-113E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan loose fibrous material with coating	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210696519

Client ID: A-114A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Brown mastic	None Detected	None Detected	Mastic/Binder
4.	Brown fibrous backing	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210696520

Client ID: A-114B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Brown mastic	None Detected	None Detected	Mastic/Binder
4.	Brown fibrous backing	None Detected	Cellulose 45%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106965
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696521

Client ID: A-114C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Brown mastic	None Detected	None Detected	Mastic/Binder
4.	Brown fibrous backing	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210696522

Client ID: A-115A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White adhesive with metal foil and bubble wrap	None Detected	None Detected	Binder/Filler
2.	Miscellaneous debris	None Detected	None Detected	Binder/Filler

Comments: Qualitative analysis was conducted for the presents of asbestos.

Lab ID: 210696523

Client ID: A-115B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White adhesive with metal foil and bubble wrap	None Detected	None Detected	Binder/Filler
2.	Miscellaneous debris	None Detected	None Detected	Binder/Filler

Comments: Qualitative analysis was conducted for the presents of asbestos.

Lab ID: 210696524

Client ID: A-115C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White adhesive with metal foil and bubble wrap	None Detected	None Detected	Binder/Filler
2.	Miscellaneous debris	None Detected	None Detected	Binder/Filler

Comments: Qualitative analysis was conducted for the presents of asbestos.



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106965
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696525

Client ID: A-116A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Dark brown fibrous paper	None Detected	Cellulose 55%	Binder/Filler
4.	Light brown fibrous paper	None Detected	Cellulose 55%	Binder/Filler

Lab ID: 210696526

Client ID: A-116B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Dark brown fibrous paper	None Detected	Cellulose 55%	Binder/Filler
4.	Light brown fibrous paper	None Detected	Cellulose 55%	Binder/Filler





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106965
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Calvin Nguyen

Signature: 

Date: 05-06-2021

Reviewed by: Vivian Le

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 47

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106966
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696601

Client ID: A-116C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Brown fibrous material	None Detected	Cellulose 55%	Binder/Filler

Lab ID: 210696602

Client ID: A-117A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696603

Client ID: A-117B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696604

Client ID: A-117C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696605

Client ID: A-118A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106966
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696606

Client ID: A-118B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696607

Client ID: A-118C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696608

Client ID: A-119A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler, Perlite

Lab ID: 210696609

Client ID: A-119B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler, Perlite

Lab ID: 210696610

Client ID: A-119C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler, Perlite



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106966
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696611

Client ID: A-120A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Off white compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210696612

Client ID: A-120B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White chalky material with paper and paint	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210696613

Client ID: A-120C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Off white compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210696614

Client ID: A-120D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White chalky material with paper and paint	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210696615

Client ID: A-120E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White chalky material with paper and paint	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106966
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696616

Client ID: A-121A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey woven fibrous material	None Detected	Glass Fibers 80%	Binder/Filler
2.	White/tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210696617

Client ID: A-121B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey woven fibrous material	None Detected	Glass Fibers 80%	Binder/Filler
2.	White/tan loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210696618

Client ID: A-121C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey woven fibrous material	None Detected	Glass Fibers 80%	Binder/Filler
2.	White/tan/red loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210696619

Client ID: A-122A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696620

Client ID: A-122B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201

www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106966
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696621

Client ID: A-122C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696622

Client ID: A-122D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696623

Client ID: A-122E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains

Analyzed by: Calvin Nguyen

Signature: 

Date: 05-06-2021

Reviewed by: Vivian Le

Signature: 

Date: 05-06-2021

*Total Layers Analyzed:36

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106967
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696701

Client ID: A-123A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with black granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains

Lab ID: 210696702

Client ID: A-123B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with black granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains

Lab ID: 210696703

Client ID: A-123C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with black granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains

Lab ID: 210696704

Client ID: A-124A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan/silver hard material	None Detected	None Detected	Binder/Filler

Lab ID: 210696705

Client ID: A-124B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan hard material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106967
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696706

Client ID: A-124C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan hard material	None Detected	None Detected	Binder/Filler

Lab ID: 210696707

Client ID: A-125A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696708

Client ID: A-125B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696709

Client ID: A-125C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696710

Client ID: A-126A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic with debris	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210696711

Client ID: A-126B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic with debris	None Detected	Cellulose 2%	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106967
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696712

Client ID: A-126C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210696713

Client ID: A-127A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696714

Client ID: A-127B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696715

Client ID: A-127C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 40%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106967
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696716

Client ID: A-128A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with trace of white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696717

Client ID: A-128B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696718

Client ID: A-128C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with trace of white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696719

Client ID: A-129A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210696720

Client ID: A-129B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106967
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696721

Client ID: A-129C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210696722

Client ID: A-130A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler
2.	Tan/silver fibrous material	None Detected	Cellulose 45%	Binder/Filler, Metal

Lab ID: 210696723


Client ID: A-130B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler
2.	Tan/silver fibrous material	None Detected	Cellulose 45%	Binder/Filler, Metal

Lab ID: 210696724

Client ID: A-130C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

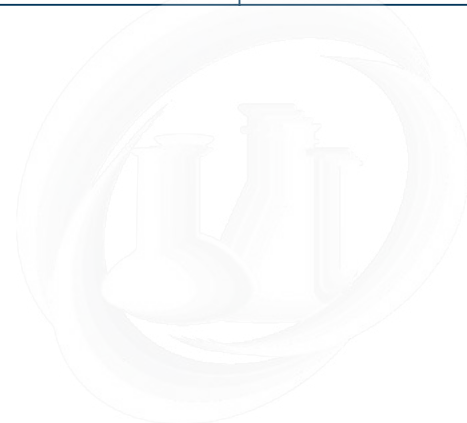



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106967
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Hanaa
Armanious

Signature: 

Date: 05-05-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-05-2021

*Total Layers Analyzed: 39

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106968
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696801

Client ID: A-131A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey woven fibrous material with mastic	None Detected	Cellulose 6%, Synthetic Fibers 8%	Mastic/Binder

Lab ID: 210696802

Client ID: A-131B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey woven fibrous material with mastic	None Detected	Cellulose 6%, Synthetic Fibers 8%	Mastic/Binder

Lab ID: 210696803

Client ID: A-131C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey woven fibrous material with mastic	None Detected	Cellulose 6%, Synthetic Fibers 8%	Mastic/Binder

Lab ID: 210696804

Client ID: A-132A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt with granules	None Detected	Glass Fibers 45%	Asphalt/Binder, Mineral Grains

Lab ID: 210696805

Client ID: A-132B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt with granules	None Detected	Glass Fibers 45%	Asphalt/Binder, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106968
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696806

Client ID: A-132C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt with granules	None Detected	Glass Fibers 45%	Asphalt/Binder, Mineral Grains

Lab ID: 210696807

Client ID: A-133A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 4%	Cellulose 2%	Asphalt/Binder

Lab ID: 210696808

Client ID: A-133B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 4%	Cellulose 2%	Asphalt/Binder

Lab ID: 210696809

Client ID: A-133C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 4%	Cellulose 2%	Asphalt/Binder

Lab ID: 210696810

Client ID: A-134A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106968
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696811

Client ID: A-134B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696812

Client ID: A-134C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696813

Client ID: A-135A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with coating	Chrysotile <1%	None Detected	Binder/Filler, Mineral Grains
2.	Light grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696814

Client ID: A-135B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with coating	Chrysotile <1%	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696815

Client ID: A-135C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with coating	Chrysotile <1%	None Detected	Binder/Filler, Mineral Grains
2.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106968
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696816

Client ID: A-136A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696817

Client ID: A-136B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696818

Client ID: A-136C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey hard sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210696819

Client ID: A-137A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Cellulose 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black asphaltic felt	None Detected	Cellulose 45%	Asphalt/Binder

Lab ID: 210696820

Client ID: A-137B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Cellulose 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black asphaltic felt	None Detected	Cellulose 45%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106968
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696821

Client ID: A-137C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Cellulose 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black asphaltic felt	None Detected	Cellulose 45%	Asphalt/Binder

Lab ID: 210696822

Client ID: A-138A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan gummy mastic with debris	None Detected	None Detected	Mastic/Binder, Fine Particles

Lab ID: 210696823

Client ID: A-138B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic with debris	None Detected	None Detected	Mastic/Binder, Fine Particles

Lab ID: 210696824

Client ID: A-138C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan gummy mastic with debris	None Detected	None Detected	Mastic/Binder, Fine Particles

Lab ID: 210696825

Client ID: A-138D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan gummy mastic with debris	None Detected	None Detected	Mastic/Binder, Fine Particles

Lab ID: 210696826

Client ID: A-138E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan/green gummy mastic with debris	None Detected	None Detected	Mastic/Binder, Fine Particles



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106968
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696827

Client ID: A-139A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler
4.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Analyzed by: Calvin Nguyen

Signature: 

Date: 05-06-2021

Reviewed by: Vivian Le

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 42

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106969
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696901

Client ID: A-139B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210696902

Client ID: A-139C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210696903

Client ID: A-139D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210696904

Client ID: A-139E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106969
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696905

Client ID: A-140A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Tan/black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210696906

Client ID: A-140B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Tan mastic with grey compacted powdery material	None Detected	Cellulose 3%	Mastic/Binder

Lab ID: 210696907

Client ID: A-140C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Tan mastic with grey compacted powdery material	None Detected	Cellulose 3%	Mastic/Binder

Lab ID: 210696908

Client ID: A-141A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106969
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696909

Client ID: A-141B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210696910

Client ID: A-141C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210696911

Client ID: A-142A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210696912

Client ID: A-142B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106969
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210696913

Client ID: A-142C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696914

Client ID: A-143A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696915

Client ID: A-143B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210696916

Client ID: A-143C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of tan fibrous material	None Detected	Cellulose 45%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106969
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696917

Client ID: A-144A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint	None Detected	None Detected	Binder/Filler, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696918

Client ID: A-144B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint	None Detected	None Detected	Binder/Filler, Paint
2.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696919

Client ID: A-144C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
3.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696920

Client ID: A-144D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	White compacted powdery material with paper	None Detected	Cellulose 2%	JC/Binder
3.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106969
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210696921

Client ID: A-144E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	White compacted powdery material with paper	None Detected	Cellulose 2%	JC/Binder
3.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696922

Client ID: A-144F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	White compacted powdery material with paper	None Detected	Cellulose 2%	JC/Binder
3.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696923

Client ID: A-144G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210696924

Client ID: A-145A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106969
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Hanaa
Armanious

Signature: 

Date: 05-06-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-06-2021

*Total Layers Analyzed:60

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106970
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697001

Client ID: A-145B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210697002

Client ID: A-145C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210697003

Client ID: A-145D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210697004

Client ID: A-145E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210697005

Client ID: A-146A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210697006

Client ID: A-146B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106970
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697007

Client ID: A-146C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210697008

Client ID: A-147A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan/pink loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697009

Client ID: A-147B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697010

Client ID: A-147C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697011

Client ID: A-147D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697012

Client ID: A-147E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106970
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697013

Client ID: A-148A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green woven fibrous material with mastic	None Detected	Synthetic Fibers 12%	Mastic/Binder
2.	White woven fibrous material with silver metal foil and paper	None Detected	Glass Fibers 3%, Cellulose 8%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder
4.	Yellow compressed fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697014

Client ID: A-148B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil, paper, and coating	None Detected	Glass Fibers 3%, Cellulose 8%	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Yellow compressed fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697015

Client ID: A-148C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil, paper, and coating	None Detected	Glass Fibers 3%, Cellulose 8%	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Yellow compressed fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697016

Client ID: A-149A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106970
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697017

Client ID: A-149B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210697018

Client ID: A-149C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210697019

Client ID: A-150A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic with silver foil	None Detected	None Detected	Mastic/Binder
2.	Brown foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam

Lab ID: 210697020

Client ID: A-150B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic with silver foil	None Detected	None Detected	Mastic/Binder
2.	Brown foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam

Lab ID: 210697021

Client ID: A-150C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic with silver foil	None Detected	None Detected	Mastic/Binder
2.	White woven fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
3.	Brown foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam
4.	Yellow loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106970
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697022

Client ID: A-151A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic material with coating	None Detected	Cellulose 2%	Asphalt/Binder
2.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
3.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder

Lab ID: 210697023

Client ID: A-151B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder

Lab ID: 210697024

Client ID: A-151C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic material with coating	None Detected	Cellulose 2%	Asphalt/Binder
2.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder

Lab ID: 210697025

Client ID: A-151D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Multilayered black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106970
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697026

Client ID: A-151E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic material with coating	None Detected	Cellulose 2%	Asphalt/Binder
2.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains

Lab ID: 210697027

Client ID: A-152A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic material with coating	None Detected	Cellulose 2%	Asphalt/Binder

Analyzed by: Calvin Nguyen

Signature: 

Date: 05-06-2021

Reviewed by: Vivian Le

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 46

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106971
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210697101

Client ID: A-152B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream/white rubbery coating	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210697102

Client ID: A-152C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery coating	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210697103

Client ID: A-153A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210697104

Client ID: A-153B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey powdery material	None Detected	None Detected	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106971
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210697105

Client ID: A-153C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey powdery material	None Detected	None Detected	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697106

Client ID: A-154A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder
2.	Cream floor tile	Chrysotile 3%	None Detected	Binder/Filler
3.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder
4.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697107

Client ID: A-154B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey powdery material	None Detected	None Detected	Mastic/Binder
2.	Cream floor tile	Chrysotile 3%	None Detected	Binder/Filler
3.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder
4.	Tan mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106971
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697108

Client ID: A-154C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder
2.	Cream floor tile	Chrysotile 3%	None Detected	Binder/Filler
3.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder
4.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697109

Client ID: A-155A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210697110

Client ID: A-155B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106971
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697111

Client ID: A-155C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210697112

Client ID: A-156A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Off white compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210697113

Client ID: A-156B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Off white compacted powdery material with tan paint	None Detected	None Detected	Binder/Filler, Paint
2.	Off white compacted powdery material with white paint	None Detected	None Detected	JC/Binder, Paint
3.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210697114

Client ID: A-156C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Off white compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	Tan chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106971
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210697115

Client ID: A-156D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Off white compacted powdery material with tan paint	None Detected	None Detected	Binder/Filler, Paint
2.	Off white compacted powdery material with white paint	None Detected	None Detected	JC/Binder, Paint
3.	Yellow loose fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
4.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210697116

Client ID: A-156E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Off white compacted powdery material with tan paint	None Detected	None Detected	Binder/Filler, Paint
2.	Off white compacted powdery material with white paint	None Detected	None Detected	JC/Binder, Paint
3.	Yellow loose fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
4.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210697117

Client ID: A-157A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210697118

Client ID: A-157B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106971
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210697119

Client ID: A-157C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210697120

Client ID: A-158A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697121

Client ID: A-158B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697122

Client ID: A-158C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697123

Client ID: A-159A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and coating	None Detected	Glass Fibers 3%	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Yellow/tan compressed fibrous material	None Detected	Mineral Wool 95%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106971
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697124

Client ID: A-159B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and coating	None Detected	Glass Fibers 3%	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Yellow/tan compressed fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697125

Client ID: A-159C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and paper	None Detected	Cellulose 8%, Glass Fibers 3%	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Yellow/tan compressed fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210697126

Client ID: A-160A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106971
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Calvin Nguyen

Signature: 

Date: 05-06-2021

Reviewed by: Vivian Le

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 64

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106976
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210697601

Client ID: A-160B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material	None Detected	Cellulose 30%, Mineral Wool 30%	Binder/Filler

Lab ID: 210697602

Client ID: A-160C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material	None Detected	Cellulose 30%, Mineral Wool 30%	Binder/Filler

Lab ID: 210697603

Client ID: A-161A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697604

Client ID: A-161B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697605

Client ID: A-161C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106976
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210697606

Client ID: A-162A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with coating	None Detected	Cellulose 70%	Binder/Filler
2.	White woven fibrous material with silver metal foil	None Detected	Glass Fibers 60%	Binder/Filler, Metal
3.	Yellow loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler
4.	Brown foamy material	None Detected	None Detected	Binder/Filler

Lab ID: 210697607

Client ID: A-162B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with coating	None Detected	Cellulose 70%	Binder/Filler
2.	Silver metal foil	None Detected	None Detected	Binder/Filler, Metal
3.	Yellow loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler
4.	Brown foamy material with debris	None Detected	None Detected	Binder/Filler, Fine Particles

Lab ID: 210697608

Client ID: A-162C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with coating	None Detected	Cellulose 70%	Binder/Filler
2.	Yellow loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler
3.	Orange loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler

Lab ID: 210697609

Client ID: A-163A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic material	None Detected	Cellulose 3%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106976
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210697610

Client ID: A-163B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic material	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210697611

Client ID: A-163C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic material	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210697612

Client ID: A-164A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 2%	Cellulose 2%	Asphalt/Binder

Lab ID: 210697613

Client ID: A-164B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 2%	Cellulose 2%	Asphalt/Binder

Lab ID: 210697614

Client ID: A-164C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 2%	Cellulose 2%	Asphalt/Binder

Lab ID: 210697615

Client ID: A-165A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106976
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697616

Client ID: A-165B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697617

Client ID: A-165C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	None Detected	None Detected	Asphalt/Binder

Lab ID: 210697618

Client ID: A-165D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697619

Client ID: A-165E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106976
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697620

Client ID: A-166A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Beige mastic	None Detected	Cellulose 2%	Mastic/Binder
4.	Cream sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
5.	Cream fibrous backing	None Detected	Cellulose 60%	Binder/Filler
6.	Tan mastic on wood	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210697621

Client ID: A-166B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Beige mastic	None Detected	Cellulose 2%	Mastic/Binder
4.	Grey floor tile	None Detected	None Detected	Binder/Filler
5.	Tan mastic	None Detected	None Detected	Mastic/Binder





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106976
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697622

Client ID: A-166C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Beige mastic	None Detected	Cellulose 2%	Mastic/Binder
4.	Grey floor tile	None Detected	None Detected	Binder/Filler
5.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697623

Client ID: A-167A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Brown/tan mastic on wood	None Detected	None Detected	Mastic/Binder





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106976
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Vivian Le

Signature: 

Date: 05-05-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-05-2021

*Total Layers Analyzed: 53

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106977
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697701

Client ID: A-167B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Brown mastic	None Detected	None Detected	Mastic/Binder
3.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697702

Client ID: A-167C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Brown mastic	None Detected	None Detected	Mastic/Binder
3.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697703

Client ID: A-168A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder
4.	White compacted powdery material	None Detected	Cellulose 2%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106977
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697704

Client ID: A-168B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697705

Client ID: A-168C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697706

Client ID: A-169A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210697707

Client ID: A-169B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210697708

Client ID: A-169C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Cellulose 2%	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106977
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697709

Client ID: A-170A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Red flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210697710

Client ID: A-170B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Red flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210697711

Client ID: A-170C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Red flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210697712

Client ID: A-171A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with coating	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106977
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697713

Client ID: A-171B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with coating	None Detected	None Detected	Mastic/Binder

Lab ID: 210697714

Client ID: A-171C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with coating	None Detected	None Detected	Mastic/Binder

Lab ID: 210697715

Client ID: A-172A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Yellow mastic with coating	None Detected	None Detected	Mastic/Binder

Lab ID: 210697716

Client ID: A-172B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Yellow mastic with coating	None Detected	None Detected	Mastic/Binder

Lab ID: 210697717

Client ID: A-172C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Pink flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Yellow mastic with coating	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106977
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697718

Client ID: A-173A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210697719

Client ID: A-173B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material with paper	None Detected	Cellulose 2%	Binder/Filler

Lab ID: 210697720

Client ID: A-173C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210697721

Client ID: A-174A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106977
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210697722

Client ID: A-174B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material with paper	None Detected	Cellulose 2%	Binder/Filler

Lab ID: 210697723

Client ID: A-174C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White powdery material	None Detected	Cellulose	Binder/Filler





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106977
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Vivian Le

Signature: 

Date: 05-05-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-05-2021

*Total Layers Analyzed: 57

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106981
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210698101

Client ID: A-175A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210698102

Client ID: A-175B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210698103

Client ID: A-175C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210698104

Client ID: A-176A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210698105

Client ID: A-176B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106981
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210698106

Client ID: A-176C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210698107

Client ID: A-177A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder

Lab ID: 210698108

Client ID: A-177B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	Yellow woven fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
3.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder

Lab ID: 210698109

Client ID: A-177C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	Yellow woven fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
3.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106981
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210698110

Client ID: A-177D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	Yellow woven fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
3.	White chalky material with paper and paint	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210698111

Client ID: A-177E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	White chalky material with paper and paint	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210698112

Client ID: A-177F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder

Lab ID: 210698113

Client ID: A-177G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	Yellow woven fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
3.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106981
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210698114

Client ID: A-178A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 30%	Binder/Filler, Perlite

Lab ID: 210698115

Client ID: A-178B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 30%	Binder/Filler, Perlite

Lab ID: 210698116

Client ID: A-178C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 30%	Binder/Filler, Perlite

Lab ID: 210698117

Client ID: A-178D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 30%	Binder/Filler, Perlite

Lab ID: 210698118

Client ID: A-178E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 30%	Binder/Filler, Perlite

Lab ID: 210698119

Client ID: A-179A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 30%	Binder/Filler, Perlite



BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106981
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210698120

Client ID: A-179B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 30%	Binder/Filler, Perlite

Lab ID: 210698121

Client ID: A-179C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 30%	Binder/Filler, Perlite

Lab ID: 210698122

Client ID: A-180A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow mastic with coating	None Detected	Glass Fibers 2%	Mastic/Binder
2.	Yellow loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler

Lab ID: 210698123

Client ID: A-180B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow mastic with coating	None Detected	Glass Fibers 2%	Mastic/Binder
2.	Yellow loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler

Lab ID: 210698124

Client ID: A-180C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow mastic with coating	None Detected	Glass Fibers 2%	Mastic/Binder
2.	Yellow loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106981
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210698125

Client ID: A-181A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and paper	None Detected	Glass Fibers 60%, Cellulose 5%	Binder/Filler
2.	Yellow loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210698126

Client ID: A-181B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White mastic	None Detected	None Detected	Binder/Filler
2.	White woven fibrous material with silver metal foil and paper	None Detected	Glass Fibers 60%, Cellulose 5%	Binder/Filler
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106981
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Vivian Le

Signature: 

Date: 05-05-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-05-2021

*Total Layers Analyzed: 50

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106982
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210698201

Client ID: A-181C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material	None Detected	None Detected	Binder/Filler
2.	White woven fibrous material with silver metal foil	None Detected	Glass Fibers 80%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder
4.	Tan compressed fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Lab ID: 210698202

Client ID: A-182A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210698203

Client ID: A-182B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210698204

Client ID: A-182C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210698205

Client ID: A-182D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106982
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210698206

Client ID: A-182E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler

Lab ID: 210698207

Client ID: A-183A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White fibrous material with silver metal foil	None Detected	Cellulose 15%	Binder/Filler
2.	Grey compressed fibrous material	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210698208

Client ID: A-183B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White fibrous material with silver metal foil	None Detected	Cellulose 15%	Binder/Filler
2.	Grey compressed fibrous material	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210698209

Client ID: A-183C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White fibrous material with silver metal foil	None Detected	Cellulose 15%	Binder/Filler
2.	Grey compressed fibrous material	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210698210

Client ID: A-184A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Brown fibrous backing	None Detected	Cellulose 55%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106982
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210698211

Client ID: A-184B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler
4.	Brown fibrous backing	None Detected	Cellulose 55%	Binder/Filler

Lab ID: 210698212

Client ID: A-184C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of white compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210698213

Client ID: A-185A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous woven asphaltic material with coating	Chrysotile 2%	Glass Fibers 6%	Asphalt/Binder

Lab ID: 210698214

Client ID: A-185B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous woven asphaltic material with coating	Chrysotile 2%	Glass Fibers 6%	Asphalt/Binder

Lab ID: 210698215

Client ID: A-185C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous woven asphaltic material with coating	Chrysotile 2%	Glass Fibers 6%	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106982
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210698216

Client ID: A-185D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous woven asphaltic material with coating	Chrysotile 2%	Glass Fibers 6%	Asphalt/Binder

Lab ID: 210698217

Client ID: A-185E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous woven asphaltic material with coating	Chrysotile 2%	Glass Fibers 6%	Asphalt/Binder

Lab ID: 210698218

Client ID: A-186A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210698219

Client ID: A-186B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White woven fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
3.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210698220

Client ID: A-186C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106982
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210698221

Client ID: A-186D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210698222

Client ID: A-186E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210698223

Client ID: A-186F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210698224

Client ID: A-186G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210698225

Client ID: A-187A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106982
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Calvin Nguyen

Signature: 

Date: 05-06-2021

Reviewed by: Vivian Le

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 47

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106993
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210699301

Client ID: A-187B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699302

Client ID: A-187C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699303

Client ID: A-187D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699304

Client ID: A-187E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699305

Client ID: A-188A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106993
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699306

Client ID: A-188B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210699307

Client ID: A-188C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210699308

Client ID: A-188D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210699309

Client ID: A-188E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210699310

Client ID: A-189A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699311

Client ID: A-189B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106993
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699312

Client ID: A-189C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Green flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699313

Client ID: A-190A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Grey compacted powdery material with mastic	None Detected	Cellulose 3%	Mastic/Binder

Lab ID: 210699314

Client ID: A-190B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Grey compacted powdery material with mastic	None Detected	Cellulose 3%	Mastic/Binder

Lab ID: 210699315

Client ID: A-190C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Grey compacted powdery material with mastic	None Detected	Cellulose 3%	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106993
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699316

Client ID: A-191A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210699317

Client ID: A-191B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210699318

Client ID: A-191C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210699319

Client ID: A-191D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210699320

Client ID: A-191E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan gummy mastic	None Detected	Cellulose 4%	Mastic/Binder

Lab ID: 210699321

Client ID: A-192A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White/grey cementitious material with paint	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains, Paint



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106993
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210699322

Client ID: A-192B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains

Lab ID: 210699323

Client ID: A-192C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material with paint	None Detected	Cellulose 2%	Binder/Filler, Mineral Grains, Paint

Analyzed by: Hanaa Armanious

Signature:

Date: 05-05-2021

Reviewed by: Zubair Ahmed

Signature:

Date: 05-05-2021

*Total Layers Analyzed: 36

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106994
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699401

Client ID: A-193A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow foamy material with white coating	None Detected	None Detected	Binder/Filler, Synthetic Foam, Mineral Grains
2.	Black fibrous asphaltic material with granules	None Detected	Synthetic Fibers 10%	Asphalt/Binder, Mineral Grains

Lab ID: 210699402

Client ID: A-193B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow foamy material with white coating	None Detected	None Detected	Binder/Filler, Synthetic Foam, Mineral Grains
2.	Black fibrous asphaltic material with granules	None Detected	Synthetic Fibers 10%, Glass Fibers 5%	Asphalt/Binder, Mineral Grains

Lab ID: 210699403

Client ID: A-193C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow foamy material with white coating	None Detected	None Detected	Binder/Filler, Synthetic Foam, Mineral Grains
2.	Black fibrous asphaltic material with granules	None Detected	Synthetic Fibers 10%	Asphalt/Binder, Mineral Grains

Lab ID: 210699404

Client ID: A-193D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow foamy material with white coating	None Detected	None Detected	Binder/Filler, Synthetic Foam, Mineral Grains
2.	Black fibrous asphaltic material with granules	None Detected	Synthetic Fibers 10%	Asphalt/Binder, Mineral Grains

Lab ID: 210699405

Client ID: A-193E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow foamy material with white coating	None Detected	None Detected	Binder/Filler, Synthetic Foam, Mineral Grains
2.	Black fibrous asphaltic material with granules	None Detected	Synthetic Fibers 10%, Glass Fibers 3%	Asphalt/Binder, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106994
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699406

Client ID: A-194A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210699407

Client ID: A-194B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210699408

Client ID: A-194C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210699409

Client ID: A-195A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material	None Detected	None Detected	Binder/Filler

Lab ID: 210699410

Client ID: A-195B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material	None Detected	None Detected	Binder/Filler

Lab ID: 210699411

Client ID: A-195C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106994
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210699412

Client ID: A-196A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material with coating	None Detected	None Detected	Vinyl/Binder, Vermiculite

Lab ID: 210699413

Client ID: A-196B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material with coating	None Detected	None Detected	Vinyl/Binder, Vermiculite

Lab ID: 210699414

Client ID: A-196C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material with coating	None Detected	None Detected	Vinyl/Binder, Vermiculite

Lab ID: 210699415

Client ID: A-197A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White adhesive with silver foil	None Detected	None Detected	Binder/Filler, Fine Particles

Lab ID: 210699416

Client ID: A-197B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White adhesive with silver foil	None Detected	None Detected	Binder/Filler, Fine Particles

Lab ID: 210699417

Client ID: A-197C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White adhesive with silver foil	None Detected	None Detected	Binder/Filler, Fine Particles



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106994
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699418

Client ID: A-198A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey powdery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699419

Client ID: A-198B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699420

Client ID: A-198C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699421

Client ID: A-198D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699422

Client ID: A-198E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106994
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699423

Client ID: A-199A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699424

Client ID: A-199B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699425

Client ID: A-199C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106994
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Vivian Le

Signature: 

Date: 05-06-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 36

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106995
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699501

Client ID: A-200A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699502

Client ID: A-200B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699503

Client ID: A-200C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699504

Client ID: A-201A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106995
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699505

Client ID: A-201B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Grey fibrous material	None Detected	Cellulose 45%, Synthetic Fibers 3%	Binder/Filler

Lab ID: 210699506

Client ID: A-201C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Grey fibrous material	None Detected	Cellulose 45%, Synthetic Fibers 3%	Binder/Filler

Lab ID: 210699507

Client ID: A-202A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Yellow mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699508

Client ID: A-202B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Yellow mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106995
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699509

Client ID: A-202C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Yellow mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699510

Client ID: A-203A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699511

Client ID: A-203B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699512

Client ID: A-203C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699513

Client ID: A-204A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey fibrous material with coating	None Detected	Synthetic Fibers 80%	Binder/Filler
2.	White chalky material with paper	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106995
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699514

Client ID: A-204B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey fibrous material with coating	None Detected	Synthetic Fibers 80%	Binder/Filler
2.	White chalky material with paper	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210699515

Client ID: A-204C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey fibrous material with coating	None Detected	Synthetic Fibers 80%	Binder/Filler
2.	White chalky material with paper	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210699516

Client ID: A-204D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey fibrous material with coating	None Detected	Synthetic Fibers 80%	Binder/Filler
2.	White chalky material with paper	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210699517

Client ID: A-204E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey fibrous material with coating	None Detected	Synthetic Fibers 80%	Binder/Filler
2.	White chalky material with paper	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210699518

Client ID: A-204F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey fibrous material with coating	None Detected	Synthetic Fibers 80%	Binder/Filler
2.	White chalky material with paper	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106995
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699519

Client ID: A-204G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey fibrous material with coating	None Detected	Synthetic Fibers 80%	Binder/Filler
2.	White chalky material with paper	None Detected	Cellulose 6%, Glass Fibers 2%	Gypsum/Binder

Lab ID: 210699520

Client ID: A-205A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210699521

Client ID: A-205B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210699522

Client ID: A-205C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210699523

Client ID: A-205D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite

Lab ID: 210699524

Client ID: A-205E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown compressed fibrous material with paint	None Detected	Cellulose 35%, Mineral Wool 35%	Binder/Filler, Perlite



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106995
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699525

Client ID: A-206A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil	None Detected	Glass Fibers 80%	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Yellow compressed fibrous material	None Detected	Mineral Wool 95%	Binder/Filler

Analyzed by: Calvin Nguyen

Signature: 

Date: 05-06-2021

Reviewed by: Vivian Le

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 48

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106996
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699601

Client ID: A-206B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and paper	None Detected	Glass Fibers 50%, Cellulose 10%	Binder/Filler, Metal
2.	Yellow loose fibrous material	None Detected	Glass Fibers 90%	Binder/Filler

Lab ID: 210699602

Client ID: A-206C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and paper	None Detected	Glass Fibers 50%, Cellulose 10%	Binder/Filler, Metal
2.	Yellow loose fibrous material	None Detected	Glass Fibers 90%	Binder/Filler

Lab ID: 210699603

Client ID: A-207A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210699604

Client ID: A-207B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106996
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699605

Client ID: A-207C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Light sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210699606

Client ID: A-208A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains
2.	Black asphaltic built-up material	None Detected	Synthetic Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Glass Fibers 40%	Asphalt/Binder, Mineral Grains

Lab ID: 210699607

Client ID: A-208B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains
2.	Black asphaltic built-up material	None Detected	Synthetic Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Glass Fibers 40%	Asphalt/Binder, Mineral Grains

Lab ID: 210699608

Client ID: A-208C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains
2.	Black asphaltic built-up material	None Detected	Synthetic Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Glass Fibers 40%	Asphalt/Binder, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106996
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699609

Client ID: A-208D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains
2.	Black asphaltic built-up material	None Detected	Synthetic Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Glass Fibers 40%	Asphalt/Binder, Mineral Grains

Lab ID: 210699610

Client ID: A-208E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains
2.	Black asphaltic built-up material	None Detected	Synthetic Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Glass Fibers 40%	Asphalt/Binder, Mineral Grains

Lab ID: 210699611

Client ID: A-209A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210699612

Client ID: A-209B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210699613

Client ID: A-209C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	None Detected	Cellulose 3%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106996
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699614

Client ID: A-210A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue vinyl material	None Detected	None Detected	Vinyl/Binder
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210699615

Client ID: A-210B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue vinyl material	None Detected	None Detected	Vinyl/Binder
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210699616

Client ID: A-210C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue vinyl material	None Detected	None Detected	Vinyl/Binder
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210699617

Client ID: A-210D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue vinyl material	None Detected	None Detected	Vinyl/Binder
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106996
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699618

Client ID: A-210E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Blue vinyl material	None Detected	None Detected	Vinyl/Binder
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210699619

Client ID: A-211

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Black asphaltic mastic	None Detected	Cellulose 2%	Asphalt/Binder

Lab ID: 210699620

Client ID: A-211B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Black asphaltic mastic	None Detected	Cellulose 2%	Asphalt/Binder

Lab ID: 210699621

Client ID: A-211C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Black asphaltic mastic	None Detected	Cellulose 2%	Asphalt/Binder

Lab ID: 210699622

Client ID: A-212A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106996
Samples Submitted: 23
Samples Analyzed: 23
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699623

Client ID: A-212B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder

Analyzed by: Vivian Le

Signature: 

Date: 05-06-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 52

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106997
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699701

Client ID: A-212C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan gummy mastic	None Detected	Synthetic Fibers <1%	Mastic/Binder

Lab ID: 210699702

Client ID: A-212D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan gummy mastic	None Detected	Synthetic Fibers <1%	Mastic/Binder

Lab ID: 210699703

Client ID: A-212E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	None Detected	Mastic/Binder
2.	Blue loose fibrous material	None Detected	Synthetic Fibers 85%	Binder/Filler

Lab ID: 210699704

Client ID: A-213A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210699705

Client ID: A-213B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106997
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699706

Client ID: A-213C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210699707

Client ID: A-214A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210699708

Client ID: A-214B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699709

Client ID: A-214C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106997
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699710

Client ID: A-215A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material with paint	None Detected	Cellulose 45%	Binder/Filler, Paint

Lab ID: 210699711

Client ID: A-215B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699712

Client ID: A-215C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream/dark brown brittle mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699713

Client ID: A-216A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106997
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699714

Client ID: A-216B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210699715

Client ID: A-216C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210699716

Client ID: A-216D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210699717

Client ID: A-216E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210699718

Client ID: A-216F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106997
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210699719

Client ID: A-216G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint with white compacted powdery material	None Detected	None Detected	JC/Binder, Paint
2.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210699720

Client ID: A-217A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210699721

Client ID: A-217B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210699722

Client ID: A-217C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210699723

Client ID: A-217D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210699724

Client ID: A-217E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106997
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699725

Client ID: A-218A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Analyzed by: Hanaa
Armanious

Signature:

Date: 05-06-2021


Reviewed by: Zubair Ahmed

Signature:

Date: 05-06-2021

*Total Layers Analyzed:48

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.

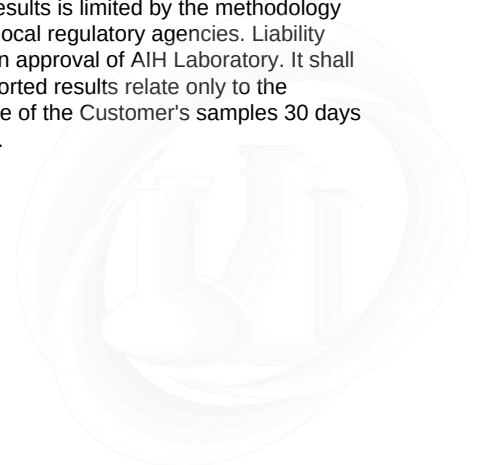



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106998
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210699801

Client ID: A-218B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of white compacted powdery material with paint	None Detected	None Detected	Binder/Filler, Paint

Lab ID: 210699802

Client ID: A-218C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of brown fibrous material	None Detected	Cellulose 55%	Binder/Filler

Lab ID: 210699803

Client ID: A-219A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Cream sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210699804

Client ID: A-219B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Cream sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106998
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699805

Client ID: A-219C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Cream sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210699806

Client ID: A-220A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder
3.	Brown loose fibrous material	None Detected	Cellulose 85%	Binder/Filler

Lab ID: 210699807

Client ID: A-220B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder
3.	Brown loose fibrous material	None Detected	Cellulose 85%	Binder/Filler

Lab ID: 210699808

Client ID: A-220C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder
3.	Brown loose fibrous material	None Detected	Cellulose 85%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106998
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699809

Client ID: A-220D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder

Lab ID: 210699810

Client ID: A-220E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder

Lab ID: 210699811

Client ID: A-221A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic	Chrysotile 2%	Cellulose 2%	Asphalt/Binder

Lab ID: 210699812

Client ID: A-221B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 3%	Cellulose 2%	Asphalt/Binder

Lab ID: 210699813

Client ID: A-221C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 3%	Cellulose 2%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106998
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699814

Client ID: A-222A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210699815

Client ID: A-222B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210699816

Client ID: A-222C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210699817

Client ID: A-223A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder

Lab ID: 210699818

Client ID: A-223B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106998
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210699819

Client ID: A-223C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder

Lab ID: 210699820

Client ID: A-223D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder

Lab ID: 210699821

Client ID: A-223E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 12%	Asphalt/Binder, Mineral Grains
2.	Multilayered black fibrous asphaltic felt	None Detected	Glass Fibers 45%	Asphalt/Binder

Lab ID: 210699822

Client ID: A-224A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown rubbery material	None Detected	None Detected	Binder/Filler
2.	Black asphaltic material with granules	None Detected	None Detected	Asphalt/Binder, Mineral Grains

Lab ID: 210699823

Client ID: A-224B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown rubbery material	None Detected	None Detected	Binder/Filler
2.	Black asphaltic material	Chrysotile 2%	None Detected	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106998
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699824

Client ID: A-224C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown rubbery material	None Detected	None Detected	Binder/Filler
2.	Black asphaltic material	None Detected	Cellulose 2%	Asphalt/Binder

Lab ID: 210699825

Client ID: A-225A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic with debris	None Detected	None Detected	Mastic/Binder, Fine Particles

Lab ID: 210699826

Client ID: A-225B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Grey powdery material	None Detected	None Detected	Binder/Filler





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106998
Samples Submitted: 26
Samples Analyzed: 26
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Calvin Nguyen

Signature: 

Date: 05-07-2021

Reviewed by: Vivian Le

Signature: 

Date: 05-07-2021

*Total Layers Analyzed: 58

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106999
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699901

Client ID: A-225C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic on wood	None Detected	None Detected	Mastic/Binder

Lab ID: 210699902

Client ID: A-225D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699903

Client ID: A-225E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699904

Client ID: A-225F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic with grey compacted powdery material	None Detected	Cellulose 3%	Mastic/Binder, Fine Particles

Lab ID: 210699905

Client ID: A-225G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Beige floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106999
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699906

Client ID: A-226A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699907

Client ID: A-226B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699908

Client ID: A-226C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic with debris	None Detected	None Detected	Mastic/Binder

Lab ID: 210699909

Client ID: A-227A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Orange floor tile	None Detected	None Detected	Binder/Filler
2.	Tan gummy mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106999
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210699910

Client ID: A-227B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Orange floor tile	None Detected	None Detected	Binder/Filler
2.	Tan gummy mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	Cellulose 3%	Binder/Filler

Lab ID: 210699911

Client ID: A-227C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Orange floor tile	None Detected	None Detected	Binder/Filler
2.	Tan gummy mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	Cellulose 3%	Binder/Filler

Lab ID: 210699912

Client ID: A-228A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Cream mastic	None Detected	Cellulose 2%	Mastic/Binder
4.	White compacted powdery material	None Detected	Cellulose 3%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2106999
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210699913

Client ID: A-228B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Cream mastic	None Detected	Cellulose 2%	Mastic/Binder
4.	White/grey compacted powdery material	None Detected	Cellulose 3%	Binder/Filler

Lab ID: 210699914

Client ID: A-228C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Cream mastic	None Detected	Cellulose 2%	Mastic/Binder

Lab ID: 210699915

Client ID: A-229A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	White fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Cream mastic grey compacted powdery material	None Detected	Cellulose 2%	Mastic/Binder, Fine Particles



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106999
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699916

Client ID: A-229B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	White fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Cream mastic grey compacted powdery material	None Detected	Cellulose 2%	Mastic/Binder, Fine Particles

Lab ID: 210699917

Client ID: A-229C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	White fibrous backing	None Detected	Cellulose 60%	Binder/Filler
3.	Cream mastic grey compacted powdery material	None Detected	Cellulose 2%	Mastic/Binder, Fine Particles

Lab ID: 210699918

Client ID: A-230A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210699919

Client ID: A-230B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106999
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210699920

Client ID: A-230C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210699921

Client ID: A-231A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210699922

Client ID: A-231B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with debris	None Detected	None Detected	Mastic/Binder





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2106999
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Hanaa
Armanious

Signature: 

Date: 05-07-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-07-2021

*Total Layers Analyzed:56

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107000
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700001

Client ID: A-231C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material with paper	None Detected	Cellulose 2%	Binder/Filler

Lab ID: 210700002

Client ID: A-232A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Red flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700003

Client ID: A-232B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700004

Client ID: A-232C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107000
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700005

Client ID: A-233A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210700006

Client ID: A-233B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210700007

Client ID: A-233C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210700008

Client ID: A-234A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107000
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700009

Client ID: A-234B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210700010

Client ID: A-234C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	White compacted powdery material	None Detected	None Detected	Binder/Filler

Lab ID: 210700011

Client ID: A-235A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Beige mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700012

Client ID: A-235B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Beige mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107000
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700013

Client ID: A-235C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Beige mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700014

Client ID: A-236A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder

Lab ID: 210700015

Client ID: A-236B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	Binder/Filler
2.	White compacted powdery material with paper	None Detected	Cellulose 2%	JC/Binder
3.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder

Lab ID: 210700016

Client ID: A-236C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107000
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700017

Client ID: A-236D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder

Lab ID: 210700018

Client ID: A-236E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder

Lab ID: 210700019

Client ID: A-236F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	Binder/Filler
2.	White compacted powdery material with white paper	None Detected	Cellulose 2%	Binder/Filler
3.	White compacted powdery material with brown paper	None Detected	Cellulose 2%	JC/Binder
4.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder

Lab ID: 210700020

Client ID: A-236G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder
2.	White chalky material with paper	None Detected	Cellulose 5%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107000
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700021

Client ID: A-237A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 25%	Binder/Filler, Perlite

Lab ID: 210700022

Client ID: A-237B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 25%	Binder/Filler, Perlite

Lab ID: 210700023

Client ID: A-237C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 25%	Binder/Filler, Perlite

Lab ID: 210700024

Client ID: A-237D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 25%	Binder/Filler, Perlite





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107000
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Vivian Le

Signature: 

Date: 05-06-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 54

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107001
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700101

Client ID: A-237E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 25%	Binder/Filler, Perlite

Lab ID: 210700102

Client ID: A-237F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 25%	Binder/Filler, Perlite

Lab ID: 210700103

Client ID: A-237G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Cellulose 40%, Glass Fibers 25%	Binder/Filler, Perlite

Lab ID: 210700104

Client ID: A-238A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and paper	None Detected	Glass Fibers 60%	Binder/Filler
2.	Yellow loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler

Lab ID: 210700105

Client ID: A-238B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and paper	None Detected	Glass Fibers 60%	Binder/Filler
2.	Yellow/orange loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107001
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700106

Client ID: A-238C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material with silver metal foil and paper	None Detected	Glass Fibers 60%	Binder/Filler
2.	Yellow/orange loose fibrous material	None Detected	Glass Fibers 95%	Binder/Filler

Lab ID: 210700107

Client ID: A-239A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White woven fibrous material	None Detected	Glass Fibers 90%	Binder/Filler
2.	White rubbery material	None Detected	None Detected	Binder/Filler
3.	Multilayered black fibrous asphaltic material with granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
4.	Black fibrous asphaltic felt	None Detected	Glass Fibers 35%	Asphalt/Binder, Mineral Grains

Lab ID: 210700108

Client ID: A-239B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Multilayered black fibrous asphaltic material with granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Glass Fibers 35%	Asphalt/Binder, Mineral Grains

Lab ID: 210700109

Client ID: A-239C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Multilayered black fibrous asphaltic material with granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Glass Fibers 35%	Asphalt/Binder, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107001
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700110

Client ID: A-239D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Multilayered black fibrous asphaltic material with granules	None Detected	Glass Fibers 10%, Synthetic Fibers 5%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Glass Fibers 35%	Asphalt/Binder, Mineral Grains

Lab ID: 210700111

Client ID: A-239E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Multilayered black fibrous asphaltic material with granules	Chrysotile <1%	Glass Fibers 10%, Synthetic Fibers 5%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Glass Fibers 35%	Asphalt/Binder, Mineral Grains

Lab ID: 210700112

Client ID: A-239F

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Multilayered black fibrous asphaltic material with granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Glass Fibers 35%	Asphalt/Binder, Mineral Grains

Lab ID: 210700113

Client ID: A-239G

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Multilayered black fibrous asphaltic material with granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic felt	None Detected	Glass Fibers 35%	Asphalt/Binder, Mineral Grains

Lab ID: 210700114

Client ID: A-240A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 3%	None Detected	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107001
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700115

Client ID: A-240B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210700116

Client ID: A-240C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	None Detected	Cellulose 3%	Asphalt/Binder

Lab ID: 210700117

Client ID: A-241A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210700118

Client ID: A-241B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder

Lab ID: 210700119

Client ID: A-241C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey floor tile	None Detected	None Detected	Binder/Filler
2.	Black asphaltic mastic	Chrysotile 2%	None Detected	Asphalt/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107001
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700120

Client ID: A-242A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey powdery material	None Detected	Cellulose 2%	Binder/Filler
2.	Yellow mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700121

Client ID: A-242B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey powdery material	None Detected	Cellulose 2%	Binder/Filler
2.	Yellow mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700122

Client ID: A-242C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey powdery material	None Detected	Cellulose 2%	Binder/Filler
2.	Yellow mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700123

Client ID: A-242D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan/black asphaltic mastic	None Detected	Cellulose 2%	Mastic/Binder, Asphalt/Binder

Lab ID: 210700124

Client ID: A-242E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey powdery material	None Detected	Cellulose 2%	Binder/Filler
2.	Yellow mastic	None Detected	None Detected	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107001
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Vivian Le

Signature: 

Date: 05-06-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-06-2021

*Total Layers Analyzed: 43

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107002
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700201

Client ID: A-243A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler

Lab ID: 210700202

Client ID: A-243B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler
2.	Trace of tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700203

Client ID: A-243C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown floor tile	None Detected	None Detected	Binder/Filler

Lab ID: 210700204

Client ID: A-244A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210700205

Client ID: A-244B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210700206

Client ID: A-244C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey cementitious material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107002
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700207

Client ID: A-245A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700208

Client ID: A-245B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic with debris	None Detected	None Detected	Mastic/Binder, Fine Particles

Lab ID: 210700209

Client ID: A-245C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Light grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700210

Client ID: A-246A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of tan fibrous material	None Detected	Cellulose 45%	Binder/Filler



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107002
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700211

Client ID: A-246B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210700212

Client ID: A-246C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700213

Client ID: A-247A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700214

Client ID: A-247B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107002
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700215

Client ID: A-247C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700216

Client ID: A-248A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700217

Client ID: A-248B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210700218

Client ID: A-248C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107002
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700219

Client ID: A-249A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700220

Client ID: A-249B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
3.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700221

Client ID: A-249C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700222

Client ID: A-250A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	Off-white chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107002
Samples Submitted: 22
Samples Analyzed: 22
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Hanaa
Armanious

Signature: 

Date: 05-07-2021

Reviewed by: Zubair Ahmed

Signature: 

Date: 05-07-2021

*Total Layers Analyzed: 44

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107003
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700301

Client ID: A-250B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Hard off-white compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700302

Client ID: A-250C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700303

Client ID: A-250D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700304

Client ID: A-250E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White compacted powdery material with paint	None Detected	None Detected	JC/Binder, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700305

Client ID: A-251A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107003
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700306

Client ID: A-251B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210700307

Client ID: A-251C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210700308

Client ID: A-251D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210700309

Client ID: A-251E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 80%, Cellulose 10%	Binder/Filler, Paint

Lab ID: 210700310

Client ID: A-252A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Soft white sandy material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey sandy material with paper	None Detected	Cellulose 3%	Binder/Filler, Mineral Grains

Lab ID: 210700311

Client ID: A-252B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Soft white sandy material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose 3%	Binder/Filler, Vermiculite



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107003
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700312

Client ID: A-252C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Soft white sandy material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey sandy material	None Detected	Cellulose 3%	Binder/Filler, Vermiculite

Lab ID: 210700313

Client ID: A-253A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210700314

Client ID: A-253B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210700315

Client ID: A-253C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210700316

Client ID: A-254A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Black fibrous asphaltic felt paper	None Detected	Cellulose 80%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107003
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700317

Client ID: A-254B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Black fibrous asphaltic felt paper	None Detected	Cellulose 80%	Asphalt/Binder

Lab ID: 210700318

Client ID: A-254C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Black fibrous asphaltic felt paper	None Detected	Cellulose 80%	Asphalt/Binder

Lab ID: 210700319

Client ID: A-254D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Black fibrous asphaltic felt paper	None Detected	Cellulose 80%	Asphalt/Binder

Lab ID: 210700320

Client ID: A-254E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material with paint	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Black fibrous asphaltic felt paper	None Detected	Cellulose 80%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107003
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700321

Client ID: A-255A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with grey granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder

Lab ID: 210700322

Client ID: A-255B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with grey granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder

Lab ID: 210700323

Client ID: A-255C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with white granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
2.	Black fibrous asphaltic material with grey granules	None Detected	Glass Fibers 10%	Asphalt/Binder, Mineral Grains
3.	Black fibrous asphaltic felt	None Detected	Cellulose 60%	Asphalt/Binder

Lab ID: 210700324

Client ID: A-256A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Trace of grey sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Yellow foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam
3.	Black fibrous asphaltic felt	None Detected	Glass Fibers 40%	Asphalt/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107003
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700325

Client ID: A-256B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Trace of grey sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Yellow foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam
3.	Black fibrous asphaltic felt	None Detected	Glass Fibers 40%	Asphalt/Binder

Lab ID: 210700326

Client ID: A-256C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Trace of grey sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Yellow foamy material	None Detected	None Detected	Binder/Filler, Synthetic Foam

Lab ID: 210700327

Client ID: A-257A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating and granules	Chrysotile 2%	None Detected	Asphalt/Binder, Mineral Grains
2.	Black asphaltic mastic with coating	None Detected	Cellulose 4%	Asphalt/Binder





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107003
Samples Submitted: 27
Samples Analyzed: 27
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Hanaa
Armanious

Signature: *Hanaa*

Date: 05-07-2021

Reviewed by: Vivian Le

Signature: *Vivian Le*

Date: 05-07-2021

*Total Layers Analyzed: 54

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107004
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700401

Client ID: A-257B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream rubbery material	None Detected	None Detected	Binder/Filler
3.	Black asphaltic mastic	None Detected	Cellulose 2%	Asphalt/Binder

Lab ID: 210700402

Client ID: A-257C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White rubbery material	None Detected	None Detected	Binder/Filler
2.	Cream rubbery material	None Detected	None Detected	Binder/Filler
3.	Black asphaltic mastic with coating	Chrysotile 4%	Cellulose 2%	Asphalt/Binder

Lab ID: 210700403

Client ID: A-258A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White/cream rubbery fibrous material with mastic	None Detected	Cellulose 15%, Synthetic Fibers 15%	Mastic/Binder

Lab ID: 210700404

Client ID: A-258B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White/cream rubbery fibrous material with mastic	None Detected	Cellulose 15%, Synthetic Fibers 15%	Mastic/Binder

Lab ID: 210700405

Client ID: A-258C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White/cream rubbery fibrous material with mastic	None Detected	Cellulose 15%, Synthetic Fibers 15%	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107004
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700406

Client ID: A-259A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream rubbery mastic with silver coating	None Detected	None Detected	Mastic/Binder

Lab ID: 210700407

Client ID: A-259B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream rubbery mastic with silver coating	None Detected	None Detected	Mastic/Binder

Lab ID: 210700408

Client ID: A-259C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream rubbery mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700409

Client ID: A-260A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Light grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210700410

Client ID: A-260B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107004
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700411

Client ID: A-260C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with coating	None Detected	None Detected	Binder/Filler, Mineral Grains
2.	Light grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains
3.	Dark grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210700412

Client ID: A-261A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Synthetic Fibers 2%	Mastic/Binder

Lab ID: 210700413

Client ID: A-261B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Synthetic Fibers 2%	Mastic/Binder

Lab ID: 210700414

Client ID: A-261C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Synthetic Fibers 2%	Mastic/Binder

Lab ID: 210700415

Client ID: A-261D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Synthetic Fibers 2%	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107004
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700416

Client ID: A-261E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Tan mastic	None Detected	Synthetic Fibers 2%	Mastic/Binder
2.	Green mastic	None Detected	Synthetic Fibers 2%	Mastic/Binder

Lab ID: 210700417

Client ID: A-262A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 55%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700418

Client ID: A-262B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 55%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700419

Client ID: A-262C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream sheet vinyl	None Detected	None Detected	Vinyl/Binder, Synthetic Foam
2.	Grey fibrous backing	None Detected	Cellulose 55%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107004
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700420

Client ID: A-263A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey fibrous backing	None Detected	Cellulose 55%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder
4.	Grey sandy material	None Detected	None Detected	Binder/Filler
5.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700421

Client ID: A-263B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey fibrous backing	None Detected	Cellulose 55%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder
4.	Grey sandy material	None Detected	None Detected	Binder/Filler
5.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700422

Client ID: A-263C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey vinyl material	None Detected	None Detected	Vinyl/Binder
2.	Grey fibrous backing	None Detected	Cellulose 55%	Binder/Filler
3.	Tan mastic	None Detected	None Detected	Mastic/Binder
4.	Grey sandy material	None Detected	None Detected	Binder/Filler
5.	Tan mastic	None Detected	None Detected	Mastic/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107004
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700423

Client ID: A-264A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700424

Client ID: A-264B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700425

Client ID: A-264C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream floor tile	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107004
Samples Submitted: 25
Samples Analyzed: 25
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Analyzed by: Calvin Nguyen

Signature: 

Date: 05-07-2021

Reviewed by: Vivian Le

Signature: 

Date: 05-07-2021

*Total Layers Analyzed: 56

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107005
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700501

Client ID: A-265A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210700502

Client ID: A-265B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Trace of tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210700503

Client ID: A-265C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black flat rubbery material	None Detected	None Detected	Binder/Filler
2.	White mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210700504

Client ID: A-266A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107005
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700505

Client ID: A-266B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700506

Client ID: A-266C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Cream flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder

Lab ID: 210700507

Client ID: A-267A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210700508

Client ID: A-267B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107005
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700509

Client ID: A-267C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Brown flat rubbery material	None Detected	None Detected	Binder/Filler
2.	Tan mastic	None Detected	None Detected	Mastic/Binder
3.	Tan fibrous material	None Detected	Cellulose 45%	Binder/Filler

Lab ID: 210700510

Client ID: A-268A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint	None Detected	None Detected	Binder/Filler, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700511

Client ID: A-268B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint	None Detected	None Detected	Binder/Filler, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700512

Client ID: A-268C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint	None Detected	None Detected	Binder/Filler, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107005
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700513

Client ID: A-268D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint	None Detected	None Detected	Binder/Filler, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700514

Client ID: A-268E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Textured paint	None Detected	None Detected	Binder/Filler, Paint
2.	White chalky material with paper	None Detected	Cellulose 6%	Gypsum/Binder

Lab ID: 210700515

Client ID: A-269A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 75%, Cellulose 15%	Binder/Filler, Paint

Lab ID: 210700516

Client ID: A-269B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 75%, Cellulose 15%	Binder/Filler, Paint

Lab ID: 210700517

Client ID: A-269C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 75%, Cellulose 15%	Binder/Filler, Paint

Lab ID: 210700518

Client ID: A-269D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 75%, Cellulose 15%	Binder/Filler, Paint



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAQ
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107005
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700519

Client ID: A-269E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey compressed fibrous material with paint	None Detected	Mineral Wool 75%, Cellulose 15%	Binder/Filler, Paint

Lab ID: 210700520

Client ID: A-270A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow/orange loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler
2.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
3.	Tan fibrous material with silver foil	None Detected	Cellulose 45%	Binder/Filler, Metal

Lab ID: 210700521

Client ID: A-270B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow/orange loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler
2.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
3.	Tan fibrous material with silver foil	None Detected	Cellulose 45%	Binder/Filler, Metal

Lab ID: 210700522

Client ID: A-270C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Yellow/orange loose fibrous material	None Detected	Mineral Wool 90%	Binder/Filler
2.	White woven fibrous material	None Detected	Glass Fibers 85%	Binder/Filler
3.	Tan fibrous material with silver foil	None Detected	Cellulose 45%	Binder/Filler, Metal



BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY



Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107005
Samples Submitted: 24
Samples Analyzed: 24
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700523

Client ID: A-271A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Lab ID: 210700524

Client ID: A-271B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	White sandy material with paint	None Detected	None Detected	Binder/Filler, Paint
2.	Grey sandy material	None Detected	None Detected	Binder/Filler, Mineral Grains

Analyzed by: Hanaa Armanious

Signature:

Date: 05-07-2021

Reviewed by: Zubair Ahmed

Signature:

Date: 05-07-2021

*Total Layers Analyzed: 52

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS
BY POLARIZED LIGHT MICROSCOPY

NVLAQ[®]
TESTING
NVLAP LAB CODE 500079-D
Phone: (562) 860-2201
www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA
92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2107006
Samples Submitted: 9
Samples Analyzed: 9
Analysis Method: EPA 600/R-93-116 &
EPA 600/M4-82-020

Lab ID: 210700601

Client ID: A-271C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Grey sandy material with paint	None Detected	None Detected	Binder/Filler, Paint

Lab ID: 210700602

Client ID: A-272A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains

Lab ID: 210700603

Client ID: A-272B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains

Lab ID: 210700604

Client ID: A-272C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains

Lab ID: 210700605

Client ID: A-272D

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains

Lab ID: 210700606

Client ID: A-272E

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black fibrous asphaltic material with granules	None Detected	Glass Fibers 15%	Asphalt/Binder, Mineral Grains



2556 W Woodland Dr Anaheim, CA 92801

BULK ASBESTOS FIBER ANALYSIS

BY POLARIZED LIGHT MICROSCOPY

NVLAP
TESTING
NVLAP LAB CODE 500079-0
Phone: (562) 860-2201
www.aihlab.com

Client Name: A-Tech Consulting Inc
Project Manager: Casandra Williams
Client Address: 1640 N. Batavia Street, Orange, CA 92867
Project Number: 211061
Project Location: 44900 60th Street West, Lancaster, CA 93536

Lab Batch Number: 2107006
Samples Submitted: 9
Samples Analyzed: 9
Analysis Method: EPA 600/R-93-116 & EPA 600/M4-82-020

Lab ID: 210700607

Client ID: A-273A

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	None Detected	Glass Fibers 2%	Asphalt/Binder, Fine Particles

Lab ID: 210700608

Client ID: A-273B

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Lab ID: 210700609

Client ID: A-273C

Layer	Layer Description	Asbestos Type %	Other Fibrous Material %	Other Non Fibrous Material
1.	Black asphaltic mastic with coating	Chrysotile 2%	None Detected	Asphalt/Binder, Fine Particles

Analyzed by: Hanaa Armanious

Signature:

Date: 05-06-2021

Reviewed by: Zubair Ahmed

Signature:

Date: 05-06-2021

*Total Layers Analyzed:9

Reporting limit is 1%. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.



BULK ASBESTOS FIBER ANALYSIS

Point Count Method (1000 Points)



Phone: (562) 860-2201

www.aihlab.com

2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc

Project Manager: Casandra Williams

Client Address: 1640 N. Batavia Street, Orange, CA
92867

Project Number: 211061

Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2109622

Samples Submitted: 4

Samples Analyzed: 4

Analysis Method: EPA Method
600/R-93/116

Laboratory Sample ID: 210962201

Client Sample ID: 135A-Layer 1

Sample Description: Layer 1 of 3: White sandy material with coating

Note: This sample was previously analyzed for asbestos content using Polarized Light Microscopy (PLM). The concentration of asbestos content was determined using visual estimation. The sample was reported to have <1% asbestos in Layer 1 and the corresponding Lab ID is 210696813.

Slide Prep Number	1	2	3	4	5	6	7	8	Total
Asbestos Points	0	0	0	0	0	0	0	0	0
Non-Asbestos Points	125	125	125	125	125	125	125	125	1000
Total Points Counted	125	125	125	125	125	125	125	125	1000

Asbestos Concentration: <0.1%

Conclusion: This sample contains <0.1% asbestos.

Comment: Asbestos fibers were observed in the field of view but not counted as points.

Laboratory Sample ID: 210962202

Client Sample ID: 135B-Layer 1

Sample Description: Layer 1 of 2: White sandy material with coating

Note: This sample was previously analyzed for asbestos content using Polarized Light Microscopy (PLM). The concentration of asbestos content was determined using visual estimation. The sample was reported to have <1% asbestos in Layer 1 and the corresponding Lab ID is 210696814.

Slide Prep Number	1	2	3	4	5	6	7	8	Total
Asbestos Points	0	0	0	0	0	0	0	0	0
Non-Asbestos Points	125	125	125	125	125	125	125	125	1000
Total Points Counted	125	125	125	125	125	125	125	125	1000

Asbestos Concentration: <0.1%

Conclusion: This sample contains <0.1% asbestos.

Comment: Asbestos fibers were observed in the field of view but not counted as points.



BULK ASBESTOS FIBER ANALYSIS

Point Count Method (1000 Points)



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc

Project Manager: Casandra Williams

Client Address: 1640 N. Batavia Street, Orange, CA
92867

Project Number: 211061

Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2109622

Samples Submitted: 4

Samples Analyzed: 4

Analysis Method: EPA Method
600/R-93/116

Laboratory Sample ID: 210962203

Client Sample ID: 135C-Layer 1

Sample Description: Layer 1 of 2: White sandy material with coating

Note: This sample was previously analyzed for asbestos content using Polarized Light Microscopy (PLM). The concentration of asbestos content was determined using visual estimation. The sample was reported to have <1% asbestos in Layer 1 and the corresponding Lab ID is 210696815.

Slide Prep Number	1	2	3	4	5	6	7	8	Total
Asbestos Points	0	0	0	0	0	0	0	0	0
Non-Asbestos Points	125	125	125	125	125	125	125	125	1000
Total Points Counted	125	125	125	125	125	125	125	125	1000

Asbestos Concentration: <0.1%

Conclusion: This sample contains <0.1% asbestos.

Comment: Asbestos fibers were observed in the field of view but not counted as points.

Laboratory Sample ID: 210962204

Client Sample ID: 239E-Layer 1

Sample Description: Layer 1 of 2: Multilayered black fibrous asphaltic material with granules

Note: This sample was previously analyzed for asbestos content using Polarized Light Microscopy (PLM). The concentration of asbestos content was determined using visual estimation. The sample was reported to have <1% asbestos in Layer 1 and the corresponding Lab ID is 210700111.

Slide Prep Number	1	2	3	4	5	6	7	8	Total
Asbestos Points	0	0	0	0	0	0	0	0	0
Non-Asbestos Points	125	125	125	125	125	125	125	125	1000
Total Points Counted	125	125	125	125	125	125	125	125	1000

Asbestos Concentration: <0.1%

Conclusion: This sample contains <0.1% asbestos.

Comment: Asbestos fibers were observed in the field of view but not counted as points.



BULK ASBESTOS FIBER ANALYSIS

Point Count Method (1000 Points)



2556 W Woodland Dr Anaheim, CA 92801

Client Name: A-Tech Consulting Inc

Project Manager: Casandra Williams

Client Address: 1640 N. Batavia Street, Orange, CA
92867

Project Number: 211061

Project Location: 44900 60th Street West, Lancaster,
CA 93536

Lab Batch Number: 2109622

Samples Submitted: 4

Samples Analyzed: 4

Analysis Method: EPA Method
600/R-93/116

Analyzed by: Calvin Nguyen

Signature:

Date: 06-21-2021

Reviewed by: Vivian Le

Signature:

Date: 06-21-2021

Reporting limit is 0.1%. "<" denotes presence of asbestos below reporting limit. ND=None Detected. If the sample was not collected by AIH Laboratory then the accuracy of the results is limited by the methodology and experience of the sample collector. Clients can verify specific reporting limit requirement from local regulatory agencies. Liability limited to cost of samples analysis. This report shall not be reproduced except in full, without written approval of AIH Laboratory. It shall not be used to claim product endorsement by NVLAP or any other agency of the government. Reported results relate only to the samples tested and may not be the representative of the sample area. AIH Laboratory shall dispose of the Customer's samples 30 days after receiving the samples unless instructed to store them for an alternate period of time in writing.





PLM BULK SAMPLE CHAIN OF CUSTODY

Analysis: PLM-Bulk EPA 600/R-93/116

Phone Number: (714) 434-6360

Turn Around Time: 5 Day

Fax Number: (714) 221-6360

Attn: Robert Williams

Results: Email to labs@atechinc.net

Project Number and Name: 211061 - LA DPW High Desert Hospital		Sampled By: Adrian Urbina			
Project Address: 44900 60th Street West		City: Lancaster	State: CA	Zip: 93536-7618	
Notes:					
Sample ID	Sample Location	Material	Friability	Condition	Est. Quantity
211061-A-001A	1st Floor, Area 7/8, 806	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	12,000 SF
211061-A-001B	1st Floor, Area 7/8, 816	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 001A
211061-A-001C	1st Floor, Area B-E, B21	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 001A
211061-A-001D	1st Floor, Area B-E, D13	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 001A
211061-A-001E	1st Floor, Area B-E, C5	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 001A
211061-A-001F	1st Floor, Area A, A30	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 001A
211061-A-001G	1st Floor, Area 3/4, 407	12" x 12" Pink Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 001A
211061-A-002A	1st Floor, Area B-E, B36	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	1,500 SF
211061-A-002B	1st Floor, Area 3/4, Corridor 4	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 002A
211061-A-002C	1st Floor, Area A, A34	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 002A
211061-A-002D	1st Floor, Area A, A23	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 002A
211061-A-002E	1st Floor, Area 7/8, Corridor 8	12" x 12" Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 002A

Client Sample Number: 211061-A-001A to 211061-A-029C

Total: 130

Relinquished By:

Date: 4/9/2021

Time: 3:53 PM

Samples Received By:

Date: 4/11/2021

Time: 8:30 A

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-003A	1st Floor, Area B-E, Corridor C	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	1,500 SF
211061-A-003B	1st Floor, Area B-E, C1	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 003A
211061-A-003C	1st Floor, Area A, A23	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 003A
211061-A-003D	1st Floor, Area B-E, B31	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 003A
211061-A-003E	1st Floor, Area 3/4, Corridor 4	12" x 12" Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 003A
211061-A-004A	1st Floor, Area B-E, B36	12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	300 SF
211061-A-004B	1st Floor, Area A, A34	12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 004A
211061-A-004C	1st Floor, Area 5/6, 512	12" x 12" White With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 004A
211061-A-005A	1st Floor, Area 7/8, Corridor 7 Exit	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	20,000 SF
211061-A-005B	1st Floor, Area 5/6, 612	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 005A
211061-A-005C	1st Floor, Area B-E, D/E Corridor	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 005A
211061-A-005D	1st Floor, Area B-E, B/C Corridor	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 005A
211061-A-005E	1st Floor, Area A, Electrical Room	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 005A
211061-A-005F	1st Floor, Area 1/2, 114	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 005A
211061-A-005G	1st Floor, Area 3/4, 410	12" x 12" Light Brown With Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 005A

Client Sample Number: 211061-A-001A to 211061-A-029C

Total: 130

Relinquished By: *[Signature]*

Date: 4/9/2021

Time: 3:53 PM

Samples Received By: *[Signature]*

Date: 4/12/2021

Time: 8:30A

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-006A	1st Floor, Area 1/2, Exit Corridor 1	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	2,000 SF
211061-A-006B	1st Floor, Area 5/6, Corridor 5 Exit	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 006A
211061-A-006C	1st Floor, Area 7/8, Corridor 7 Exit	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 006A
211061-A-006D	1st Floor, Area B-E, Corridor E	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 006A
211061-A-006E	1st Floor, Area B-E, B/C Corridor	12" x 12" Dark Brown With Tan Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 006A
211061-A-007A	1st Floor, Area 7/8, 815	Gold Carpet Glue With Leveling Compound	Non-Friable	Good	5,500 SF
211061-A-007B	1st Floor, Area 7/8, Corridor 7	Gold Carpet Glue With Leveling Compound	Non-Friable	Good	See 007A
211061-A-007C	1st Floor, Area 7/8, 702	Gold Carpet Glue With Leveling Compound	Non-Friable	Good	See 007A
211061-A-007D	1st Floor, Area 3/4, 303	Gold Carpet Glue With Leveling Compound	Non-Friable	Good	See 007A
211061-A-007E	1st Floor, Area B-E, E11	Gold Carpet Glue With Leveling Compound	Non-Friable	Good	See 007A
211061-A-007F	1st Floor, Area A, A1	Gold Carpet Glue With Leveling Compound	Non-Friable	Good	See 007A
211061-A-007G	1st Floor, Area B-E, B Corridor	Gold Carpet Glue With Leveling Compound	Non-Friable	Good	See 007A
211061-A-008A	1st Floor, HQ, Room	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	1,200 SF
211061-A-008B	1st Floor, Area B-E, D16	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 008A
211061-A-008C	1st Floor, Area 7/8, 815	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 008A
211061-A-008D	1st Floor, Area B-E, E20	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 008A
211061-A-008E	1st Floor, Area B-E, C16	12" x 12" Light Blue Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 008A

Client Sample Number: 211061-A-001A to 211061-A-029C

Total: 130

Relinquished By: 

Date: 4/9/2021

Time: 3:53 PM

Samples Received By: 

Date: 4/12/2021

Time: 8:30A

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-009A	1st Floor, Area 7/8, 813	12" x 12" Blue With Gray Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	60 SF
211061-A-009B	1st Floor, Area 7/8, 813	12" x 12" Blue With Gray Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 009A
211061-A-009C	1st Floor, Area 7/8, 813	12" x 12" Blue With Gray Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 009A
211061-A-010A	1st Floor, Area 7/8, 813	12" x 12" Dark Gray With Black Streaks Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	60 SF
211061-A-010B	1st Floor, Area 7/8, 813	12" x 12" Dark Gray With Black Streaks Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 010A
211061-A-010C	1st Floor, Area 7/8, 813	12" x 12" Dark Gray With Black Streaks Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 010A
211061-A-011A	1st Floor, Area 7/8, 800	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	1,300 SF
211061-A-011B	1st Floor, Area B-E, C26	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 011A
211061-A-011C	1st Floor, Area B-E, E4	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 011A
211061-A-011D	1st Floor, Area 1/2, 103	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 011A
211061-A-011E	1st Floor, Area B-E, B28	9" x 9" Pink With Black and Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 011A
211061-A-013A	1st Floor, Area B-E, C39	9" x 9" Light Brown With Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	500 SF
211061-A-013B	1st Floor, Area B-E, C35	9" x 9" Light Brown With Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 013A
211061-A-013C	1st Floor, Area 1/2, 112	9" x 9" Light Brown With Tan and Dark Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 013A
211061-A-014A	1st Floor, Area B-E, C34	Green Carpet Glue	Non-Friable	Good	700 SF
211061-A-014B	1st Floor, Area B-E, C34	Green Carpet Glue	Non-Friable	Good	See 014A


Client Sample Number: 211061-A-001A to 211061-A-029C

Total: 130

Relinquished By: 

Date: 4/9/2021

Time: 3:53 PM

Samples Received By: 

Date: 4/12/2021

Time: 8:30A

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-014C	1st Floor, Area 5/6, 507	Green Carpet Glue	Non-Friable	Good	See 014A
211061-A-015A	1st Floor, Area 3/4, 403	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	1,500 SF
211061-A-015B	1st Floor, Area 3/4, 313	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 015A
211061-A-015C	1st Floor, Area B-E, B31	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 015A
211061-A-015D	1st Floor, Area B-E, B39	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 015A
211061-A-015E	1st Floor, Area B-E, C32	9" x 9" Pink With Red and Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 015A
211061-A-016A	1st Floor, Area B-E, Kitchen	Concrete	Non-Friable	Good	100,000 SF
211061-A-016B	1st Floor, Area B-E, Kitchen	Concrete	Non-Friable	Good	See 016A
211061-A-016C	1st Floor, Area B-E, Kitchen	Concrete	Non-Friable	Good	See 016A
211061-A-016D	1st Floor, Area 5/6, 605	Concrete	Non-Friable	Good	See 016A
211061-A-016E	1st Floor, Area B-E, D26	Concrete	Non-Friable	Good	See 016A
211061-A-016F	1st Floor, Area 1/2, 202	Concrete	Non-Friable	Fair	See 016A
211061-A-016G	1st Floor, Area B-E, D26	Concrete	Non-Friable	Fair	See 016A
211061-A-017A	1st Floor, Area 3/4, 304	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	8,000 SF
211061-A-017B	1st Floor, Area B-E, B35	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 017A
211061-A-017C	1st Floor, Area B-E, S40	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 017A
211061-A-017D	1st Floor, Area B-E, D30	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 017A
211061-A-017E	1st Floor, Area B-E, E18	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 017A


Client Sample Number: 211061-A-001A to 211061-A-029C

Total: 130

Relinquished By: 

Date: 4/9/2021

Time: 3:53 PM

Samples Received By: 

Date: 4/12/2021

Time: 8:21A

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-017F	1st Floor, Area B-E, C17A	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 017A
211061-A-017G	1st Floor, Area B-E, B22	12" x 12" Tan With Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 017A
211061-A-018A	1st Floor, Area B-E, C14	9" x 9" Green With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	100 SF
211061-A-018B	1st Floor, Area B-E, C14	9" x 9" Green With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 018A
211061-A-018C	1st Floor, Area B-E, C14	9" x 9" Green With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 018A
211061-A-019A	1st Floor, Area B-E, B2	Tan Speckled Vinyl Sheeting	Non-Friable	Fair	6,000 SF
211061-A-019B	1st Floor, Area B-E, OR1	Tan Speckled Vinyl Sheeting	Non-Friable	Fair	See 019A
211061-A-019C	1st Floor, Area B-E, OR2	Tan Speckled Vinyl Sheeting	Non-Friable	Fair	See 019A
211061-A-019D	1st Floor, Area B-E, OR3	Tan Speckled Vinyl Sheeting	Non-Friable	Fair	See 019A
211061-A-019E	1st Floor, Area B-E, D28	Tan Speckled Vinyl Sheeting	Non-Friable	Fair	See 019A
211061-A-019F	1st Floor, Area B-E, S14	Tan Speckled Vinyl Sheeting	Non-Friable	Fair	See 019A
211061-A-019G	1st Floor, Area B-E, S2	Tan Speckled Vinyl Sheeting	Non-Friable	Fair	See 019A
211061-A-020A	1st Floor, Area B-E, E22	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	1,700 SF
211061-A-020B	1st Floor, Area B-E, D4	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 020A
211061-A-020C	1st Floor, Area 1/2, 102	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 020A
211061-A-020D	1st Floor, Area 1/2, 108	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 020A
211061-A-020E	1st Floor, Area 1/2, 110	12" x 12" Light Tan With Light Brown Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 020A
211061-A-021A	1st Floor, Area B-E, E20	12" x 12" White with Blue and Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	900 SF


Client Sample Number: 211061-A-001A to 211061-A-029C

Total: 130

Relinquished By: 

Date: 4/9/2021

Time: 3:53 PM

Samples Received By: 

Date: 4/12/2021

Time: 8:30A

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-021B	1st Floor, Area B-E, B1	12" x 12" White with Blue and Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 021A
211061-A-021C	1st Floor, Area B-E, B1	12" x 12" White with Blue and Red Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Fair	See 021A
211061-A-022A	1st Floor, Area 1/2, I17	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	8,000 SF
211061-A-022B	1st Floor, Area B-E, B19	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 022A
211061-A-022C	1st Floor, Area 3/4, Corridor 3 Exit	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 022A
211061-A-022D	1st Floor, Area 1/2, Exit Corridor 2	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 022A
211061-A-022E	1st Floor, Area B-E, E10	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 022A
211061-A-022F	1st Floor, Area B-E, E18	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 022A
211061-A-022G	1st Floor, Area 3/4, 417	12" x 12" Brown and White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 022A
211061-A-023A	1st Floor, Area B-E, B20	Tan with Red and Blue Specks Vinyl Sheeting	Non-Friable	Good	500 SF
211061-A-023B	1st Floor, Area B-E, B20	Tan with Red and Blue Specks Vinyl Sheeting	Non-Friable	Good	See 023A
211061-A-023C	1st Floor, Area B-E, B20	Tan with Red and Blue Specks Vinyl Sheeting	Non-Friable	Good	See 023A
211061-A-024A	1st Floor, Area B-E, B3	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	2,800 SF
211061-A-024B	1st Floor, Area B-E, S20	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 024A
211061-A-024C	1st Floor, Area B-E, S21	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 024A
211061-A-024D	1st Floor, Area B-E, E9	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 024A


Client Sample Number: 211061-A-001A to 211061-A-029C

Total: 130

Relinquished By: 

Date: 4/9/2021

Time: 3:53 PM

Samples Received By: 

Date: 4/12/2021

Time: 8:30A

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-024E	1st Floor, Area B-E, C2	12" x 12" Orange With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 024A
211061-A-025A	1st Floor, Area B-E, D4	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	4,800 SF
211061-A-025B	1st Floor, Area B-E, S13	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 025A
211061-A-025C	1st Floor, Area B-E, B21	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 025A
211061-A-025D	1st Floor, Area B-E, S17	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 025A
211061-A-025E	1st Floor, Area A, A27	12" x 12" Off-White With Light Brown and Gray Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 025A
211061-A-026A	1st Floor, Area B-E, C10-A	2' x 2' Gold Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	100 SF
211061-A-026B	1st Floor, Area B-E, C10-A	2' x 2' Gold Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 026A
211061-A-026C	1st Floor, Area B-E, C10-A	2' x 2' Gold Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 026A
211061-A-027A	1st Floor, Area A, A23	12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	30 SF
211061-A-027B	1st Floor, Area A, A23	12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 027A
211061-A-027C	1st Floor, Area A, A23	12" x 12" Brown with Gold Flakes Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 027A
211061-A-028A	1st Floor, Area A, A23	12" x 12" Granite Colored Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	70 SF
211061-A-028B	1st Floor, Area A, A23	12" x 12" Granite Colored Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 028A
211061-A-028C	1st Floor, Area A, A23	12" x 12" Granite Colored Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 028A
211061-A-029A	1st Floor, Area A, A27 Bathroom	9" x 9" Brown With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	50 SF
211061-A-029B	1st Floor, Area A, A27 Bathroom	9" x 9" Brown With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 029A

Client Sample Number: 211061-A-001A to 211061-A-029C

Total: 130

Relinquished By:

Date: 4/9/2021

Time: 3:53 PM

Samples Received By:

Date: 4/12/2021

Time: 8:30A

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



A-Tech Consulting, Inc.

2105795

A-Tech Project Number: 211061

Client Reference Number: Contract PW-15020

PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-029C	1st Floor, Area A. A27 Bathroom	9" x 9" Brown With White Streaked Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 029A

Client Sample Number: 211061-A-001A to 211061-A-029C

Total: 130

Relinquished By: *[Signature]*

Date: 4/9/2021

Time: 3:53 PM

Samples Received By: *Ryan Scull CA*

Date: 4/12/2021

Time: 8:30 A

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

2106038

Analysis: PLM-Bulk EPA 600/R-93/116

Phone Number: (714) 434-6360

Turn Around Time: 5 Day

Fax Number: (714) 221-6360

Attn: Robert Williams

Results: Email to labs@atechinc.net

Project Number and Name: 211061 - LA DPW High Desert Hospital		Sampled By: Adrian Urbina			
Project Address: 44900 60th Street West		City: Lancaster	State: CA	Zip: 93536-7618	
Notes:					
Sample ID	Sample Location	Material	Friability	Condition	Est. Quantity
211061-A-030A	1st Floor, Area 7/8, 810	6" Cream Cove Base/Cove Base Mastic	Non-Friable	Good	1,000 SF
211061-A-030B	1st Floor, Area B-E, B36	6" Cream Cove Base/Cove Base Mastic	Non-Friable	Good	See 030A
211061-A-030C	1st Floor, Area B-E, D29	6" Cream Cove Base/Cove Base Mastic	Non-Friable	Good	See 030A
211061-A-030D	1st Floor, Area A, A34	6" Cream Cove Base/Cove Base Mastic	Non-Friable	Good	See 030A
211061-A-030E	1st Floor, Area 3/4, Corridor 4 Exit	6" Cream Cove Base/Cove Base Mastic	Non-Friable	Good	See 030A
211061-A-031A	1st Floor, Area 5/6, 502	6" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	1,000 SF
211061-A-031B	1st Floor, Area 7/8, Corridor 8 Exit	6" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 031A
211061-A-031C	1st Floor, Area B-E, D23	6" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 031A
211061-A-031D	1st Floor, Area B-E, C17	6" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 031A
211061-A-031E	1st Floor, Area B-E, E4	6" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 031A
211061-A-032A	1st Floor, Area 7/8, 704	6" Dark Gray Cove Base/Cove Base Mastic	Non-Friable	Good	300 SF
211061-A-032B	1st Floor, Area B-E, S21	6" Dark Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 032A
211061-A-032C	1st Floor, Area B-E, C10-A	6" Dark Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 032A
211061-A-033A	1st Floor, Area 7/8, 813	4" Dark Gray Cove Base/Cove Base Mastic	Non-Friable	Good	80 SF

Client Sample Number: 211061-A-030A to 211061-A-063C

Total: 148

Relinquished By:

Date: 4/14/2021

Time: 4:43 PM

Samples Received By: Sarah Tran

Date: 4/14/21

Time: 4:44 pm

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-033B	1st Floor, Area B-E, C16	4" Dark Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 033A
211061-A-033C	1st Floor, Area B-E, C16A	4" Dark Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 033A
211061-A-034A	1st Floor, Area 7/8, 800	6" Red Cove Base/Cove Base Mastic	Non-Friable	Good	100 SF
211061-A-034B	1st Floor, Area B-E, B16	6" Red Cove Base/Cove Base Mastic	Non-Friable	Good	See 034A
211061-A-034C	1st Floor, Area 3/4, 403	6" Red Cove Base/Cove Base Mastic	Non-Friable	Good	See 034A
211061-A-035A	1st Floor, Area 7/8, 706	6" Light Green Cove Base/Cove Base Mastic	Non-Friable	Good	800 SF
211061-A-035B	1st Floor, Area B-E, C21	6" Light Green Cove Base/Cove Base Mastic	Non-Friable	Good	See 035A
211061-A-035C	1st Floor, Area B-E, D38	6" Light Green Cove Base/Cove Base Mastic	Non-Friable	Good	See 035A
211061-A-036A	1st Floor, Area 7/8, 702	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	1,000 SF
211061-A-036B	1st Floor, Area B-E, E9	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 036A
211061-A-036C	1st Floor, Area 5/6, Corridor 5	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 036A
211061-A-036D	1st Floor, Area B-E, S13	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 036A
211061-A-036E	1st Floor, Area A, A10	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 036A
211061-A-037A	1st Floor, Area 7/8, 707	6" Dark Green Cove Base/Cove Base Mastic	Non-Friable	Good	40 SF
211061-A-037B	1st Floor, Area 7/8, 707	6" Dark Green Cove Base/Cove Base Mastic	Non-Friable	Good	See 037A
211061-A-037C	1st Floor, Area 7/8, 708	6" Dark Green Cove Base/Cove Base Mastic	Non-Friable	Good	See 037A
211061-A-038A	1st Floor, Area B-E, C35	6" Black Cove Base/Cove Base Mastic	Non-Friable	Good	300 SF
211061-A-038B	1st Floor, Area 7/8, 713	6" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 038A
211061-A-038C	1st Floor, Area A, A11	6" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 038A
211061-A-039A	1st Floor, Area 5/6, 606	4" Dark Tan Cove Base/Cove Base Mastic	Non-Friable	Good	50 SF
211061-A-039B	1st Floor, Area A, A26	4" Dark Tan Cove Base/Cove Base Mastic	Non-Friable	Good	See 039A
211061-A-039C	1st Floor, Area A, A13	4" Dark Tan Cove Base/Cove Base Mastic	Non-Friable	Good	See 039A

Client Sample Number: 211061-A-030A to 211061-A-063C

Total: 148

Relinquished By: 

Date: 4/14/2021

Time: 4:43 PM

Samples Received By: Sarah Tran 

Date: 4/14/21

Time: 4:44pm

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-040A	1st Floor, Area A, A27	6" Dark Tan Cove Base/Cove Base Mastic	Non-Friable	Good	250 SF
211061-A-040B	1st Floor, Area B-E, C2	6" Dark Tan Cove Base/Cove Base Mastic	Non-Friable	Good	See 040A
211061-A-040C	1st Floor, Area B-E, D25	6" Dark Tan Cove Base/Cove Base Mastic	Non-Friable	Good	See 040A
211061-A-041A	1st Floor, Area B-E, D30	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	200 SF
211061-A-041B	1st Floor, Area 1/2, 102	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 041A
211061-A-041C	1st Floor, Area B-E, D4	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 041A
211061-A-042A	1st Floor, Area B-E, E22	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	50 SF
211061-A-042B	1st Floor, Area B-E, E22	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 042A
211061-A-042C	1st Floor, Area B-E, E18	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 042A
211061-A-043A	1st Floor, Area B-E, B1	6" Blue Cove Base/Cove Base Mastic	Non-Friable	Good	30 SF
211061-A-043B	1st Floor, Area B-E, B1	6" Blue Cove Base/Cove Base Mastic	Non-Friable	Good	See 043A
211061-A-043C	1st Floor, Area B-E, B1	6" Blue Cove Base/Cove Base Mastic	Non-Friable	Good	See 043A
211061-A-044A	1st Floor, Area 1/2, Corridor 1	Plaster	Non-Friable	Good	250,000 SF
211061-A-044B	1st Floor, Area 3/4, Corridor 4	Plaster	Non-Friable	Good	See 044A
211061-A-044C	1st Floor, Area 5/6, Corridor 6	Plaster	Non-Friable	Good	See 044A
211061-A-044D	1st Floor, Area B-E, D/E Corridor	Plaster	Non-Friable	Good	See 044A
211061-A-044E	1st Floor, Area B-E, D2 Corridor	Plaster	Non-Friable	Good	See 044A
211061-A-044F	1st Floor, Area A, Corridor A	Plaster	Non-Friable	Good	See 044A
211061-A-044G	1st Floor, Area 7/8, Corridor 8	Plaster	Non-Friable	Good	See 044A
211061-A-045A	1st Floor, HQ, Room	Drywall with Joint Compound	Non-Friable	Good	2,000 SF
211061-A-045B	1st Floor, Area B-E, E11	Drywall with Joint Compound	Non-Friable	Good	See 045A
211061-A-045C	1st Floor, Area 5/6, 502	Drywall with Joint Compound	Non-Friable	Good	See 045A
211061-A-045D	1st Floor, Area B-E, E13	Drywall with Joint Compound	Non-Friable	Good	See 045A
211061-A-045E	1st Floor, Area B-E, C21	Drywall with Joint Compound	Non-Friable	Good	See 045A
211061-A-045F	1st Floor, Area B-E, D25	Drywall with Joint Compound	Non-Friable	Good	See 045A

Client Sample Number: 211061-A-030A to 211061-A-063C

Total: 148

Relinquished By:

Date: 4/14/2021

Time: 4:43 PM

Samples Received By: Sarah Tran

Date: 4/14/21

Time: 4:44pm

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-045G	1st Floor, Area B-E, C15A	Drywall with Joint Compound	Non-Friable	Good	See 045A
211061-A-046A	1st Floor, Area B-E, E22	Dark Brown Hockey Puck Mastic	Non-Friable	Good	2,000 SF
211061-A-046B	1st Floor, Area B-E, D23	Dark Brown Hockey Puck Mastic	Non-Friable	Good	See 046A
211061-A-046C	1st Floor, Area B-E, C16	Dark Brown Hockey Puck Mastic	Non-Friable	Good	See 046A
211061-A-046D	1st Floor, Area A, A23	Dark Brown Hockey Puck Mastic	Non-Friable	Good	See 046A
211061-A-046E	1st Floor, Area 3/4, 302	Dark Brown Hockey Puck Mastic	Non-Friable	Good	See 046A
211061-A-046F	1st Floor, Area B-E, B11	Dark Brown Hockey Puck Mastic	Non-Friable	Good	See 046A
211061-A-046G	1st Floor, Area A, A9	Dark Brown Hockey Puck Mastic	Non-Friable	Good	See 046A
211061-A-047A	1st Floor, Area 5/6, 506	6" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	500 SF
211061-A-047B	1st Floor, Area B-E, C15	6" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 047A
211061-A-047C	1st Floor, Area 1/2, 106	6" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 047A
211061-A-047D	1st Floor, Area B-E, B28	6" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 047A
211061-A-047E	1st Floor, Area 3/4, 406	6" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 047A
211061-A-048A	1st Floor, Area A, A4	6" Dark Blue Cove Base/Cove Base Mastic	Non-Friable	Good	80 SF
211061-A-048B	1st Floor, Area A, A-N Corridor	6" Dark Blue Cove Base/Cove Base Mastic	Non-Friable	Good	See 048A
211061-A-048C	1st Floor, Area A, A-S Corridor	6" Dark Blue Cove Base/Cove Base Mastic	Non-Friable	Good	See 048A
211061-A-049A	1st Floor, Area 7/8, Corridor 7	2' x 2' White Pitted Ceiling Tile	Friable	Good	25,000 SF
211061-A-049B	1st Floor, Area B-E, C15	2' x 2' White Pitted Ceiling Tile	Friable	Good	See 049A
211061-A-049C	1st Floor, Area B-E, D29	2' x 2' White Pitted Ceiling Tile	Friable	Good	See 049A
211061-A-049D	1st Floor, Area A, A10	2' x 2' White Pitted Ceiling Tile	Friable	Good	See 049A
211061-A-049E	1st Floor, Area B-E, E11	2' x 2' White Pitted Ceiling Tile	Friable	Good	See 049A
211061-A-049F	1st Floor, Area 1/2, Corridor 2	2' x 2' White Pitted Ceiling Tile	Friable	Good	See 049A
211061-A-049G	1st Floor, Area 5/6, Corridor 6 Exit	2' x 2' White Pitted Ceiling Tile	Friable	Good	See 049A
211061-A-050A	1st Floor, Area A, A23	1' x 1' White Large Pitted Ceiling Tile	Friable	Good	
211061-A-050B	1st Floor, Area B-E, B31	1' x 1' White Large Pitted Ceiling Tile	Friable	Good	See 050A

Client Sample Number: 211061-A-030A to 211061-A-063C

Total: 148

Relinquished By:

Date: 4/14/2021

Time: 4:43 PM

Samples Received By: Sarah Tran

Date: 4/14/21

Time: 4:44pm

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-050C	1st Floor, Area B-E, E22	1' x 1' White Large Pitted Ceiling Tile	Friable	Good	See 050A
211061-A-050D	1st Floor, Area B-E, C16	1' x 1' White Large Pitted Ceiling Tile	Friable	Good	See 050A
211061-A-050E	1st Floor, Area B-E, C32	1' x 1' White Large Pitted Ceiling Tile	Friable	Good	See 050A
211061-A-050F	1st Floor, Area B-E, C22	1' x 1' White Large Pitted Ceiling Tile	Friable	Good	See 050A
211061-A-050G	1st Floor, Area A, A9	1' x 1' White Large Pitted Ceiling Tile	Friable	Good	See 050A
211061-A-051A	1st Floor, Area B-E, C21	1' x 1' White Small Pitted Ceiling Tile	Friable	Good	15,000 SF
211061-A-051B	1st Floor, Area B-E, D23	1' x 1' White Small Pitted Ceiling Tile	Friable	Good	See 051A
211061-A-051C	1st Floor, Area B-E, E11	1' x 1' White Small Pitted Ceiling Tile	Friable	Good	See 051A
211061-A-051D	1st Floor, Area A, A14	1' x 1' White Small Pitted Ceiling Tile	Friable	Good	See 051A
211061-A-051E	1st Floor, Area B-E, E13	1' x 1' White Small Pitted Ceiling Tile	Friable	Good	See 051A
211061-A-051F	1st Floor, Area 5/6, 618	1' x 1' White Small Pitted Ceiling Tile	Friable	Good	See 051A
211061-A-051G	1st Floor, Area 3/4, 302	1' x 1' White Small Pitted Ceiling Tile	Friable	Good	See 051A
211061-A-052A	1st Floor, Area A, A18	2' x 4' White Small Pitted Ceiling Tile	Friable	Good	6,000 SF
211061-A-052B	1st Floor, Area B-E, B36	2' x 4' White Small Pitted Ceiling Tile	Friable	Good	See 052A
211061-A-052C	1st Floor, Area B-E, D27	2' x 4' White Small Pitted Ceiling Tile	Friable	Good	See 052A
211061-A-052D	1st Floor, Area B-E, E11	2' x 4' White Small Pitted Ceiling Tile	Friable	Good	See 052A
211061-A-052E	1st Floor, Area A, A9	2' x 4' White Small Pitted Ceiling Tile	Friable	Good	See 052A
211061-A-052F	1st Floor, Area B-E, B33	2' x 4' White Small Pitted Ceiling Tile	Friable	Good	See 052A
211061-A-052G	1st Floor, Area A, A15	2' x 4' White Small Pitted Ceiling Tile	Friable	Good	See 052A
211061-A-053A	1st Floor, Area B-E, E4	1' x 1' White Fissured Ceiling Tile	Friable	Good	200 SF
211061-A-053B	1st Floor, Area B-E, E4	1' x 1' White Fissured Ceiling Tile	Friable	Good	See 053A
211061-A-053C	1st Floor, Area B-E, E4	1' x 1' White Fissured Ceiling Tile	Friable	Good	See 053A
211061-A-054A	1st Floor, Area B-E, S13	2' x 4' White Flat Ceiling Tile	Friable	Good	1,500 SF

Client Sample Number: 211061-A-030A to 211061-A-063C

Total: 148

Relinquished By: *[Signature]*

Date: 4/14/2021

Time: 4:43 PM

Samples Received By: *[Signature]*

Date: 4/14/2021

Time: 4:44 PM

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-054B	1st Floor, Area B-E, E9	2' x 4' White Flat Ceiling Tile	Friable	Good	See 054A
211061-A-054C	1st Floor, Area B-E, S21	2' x 4' White Flat Ceiling Tile	Friable	Good	See 054A
211061-A-054D	1st Floor, Area B-E, S5	2' x 4' White Flat Ceiling Tile	Friable	Good	See 054A
211061-A-054E	1st Floor, Area B-E, B19	2' x 4' White Flat Ceiling Tile	Friable	Good	See 054A
211061-A-055A	1st Floor, Area B-E, C2	2' x 2' White Flat Drywall Ceiling Tile	Non-Friable	Good	800 SF
211061-A-055B	1st Floor, Area B-E, C2	2' x 2' White Flat Drywall Ceiling Tile	Non-Friable	Good	See 055A
211061-A-055C	1st Floor, Area B-E, C2	2' x 2' White Flat Drywall Ceiling Tile	Non-Friable	Good	See 055A
211061-A-056A	1st Floor, HQ, Room	2' x 2' White Fissured Ceiling Tile	Friable	Good	900 SF
211061-A-056B	1st Floor, Area A, A-N Corridor	2' x 2' White Fissured Ceiling Tile	Friable	Good	See 056A
211061-A-056C	1st Floor, Area B-E, B34	2' x 2' White Fissured Ceiling Tile	Friable	Good	See 056A
211061-A-057A	1st Floor, Area B-E, B19	2' x 4' White Plastic Covered Ceiling Tile	Friable	Good	500 SF
211061-A-057B	1st Floor, Area B-E, B19	2' x 4' White Plastic Covered Ceiling Tile	Friable	Good	See 057A
211061-A-057C	1st Floor, Area B-E, B19	2' x 4' White Plastic Covered Ceiling Tile	Friable	Good	See 057A
211061-A-058A	1st Floor, Area B-E, B34	2' x 4' White Fissured Ceiling Tile	Friable	Good	200 SF
211061-A-058B	1st Floor, Area B-E, B34	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 058A
211061-A-058C	1st Floor, Area B-E, B34	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 058A
211061-A-059A	1st Floor, Area B-E, Corridor D	Gray Fireproofing	Friable	Good	150,000 SF
211061-A-059B	1st Floor, Area A, Corridor A	Gray Fireproofing	Friable	Good	See 059A
211061-A-059C	1st Floor, Area B-E, Corridor C	Gray Fireproofing	Friable	Good	See 059A
211061-A-059D	1st Floor, Area B-E, Corridor E	Gray Fireproofing	Friable	Good	See 059A
211061-A-059E	1st Floor, Area B-E, D/E Corridor	Gray Fireproofing	Friable	Good	See 059A
211061-A-059F	1st Floor, Area B-E, B/C Corridor	Gray Fireproofing	Friable	Good	See 059A
211061-A-059G	1st Floor, Area B-E, B Corridor	Gray Fireproofing	Friable	Good	See 059A
211061-A-060A	1st Floor, Area B-E, Corridor E	Wheat Tape with Yellow Insulation Pipe Wrap	Friable	Good	4,500 SF
211061-A-060B	1st Floor, Area B-E, B/C Corridor	Wheat Tape with Yellow Insulation Pipe Wrap	Friable	Good	See 060A

Client Sample Number: 211061-A-030A to 211061-A-063C

Total: 148

Relinquished By:

Date: 4/14/2021

Time: 4:43 PM

Samples Received By:

Date: 4/14/2021

Time: 4:44 PM

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-060C	1st Floor, Area B-E, C2	Wheat Tape with Yellow Insulation Pipe Wrap	Friable	Good	See 060A
211061-A-060D	1st Floor, Area B-E, B Corridor	Wheat Tape with Yellow Insulation Pipe Wrap	Friable	Good	See 060A
211061-A-060E	1st Floor, Area A, Corridor A	Wheat Tape with Yellow Insulation Pipe Wrap	Friable	Good	See 060A
211061-A-061A	1st Floor, Area B-E, Corridor D	Orange Insulation	Friable	Good	4,500 SF
211061-A-061B	1st Floor, Area B-E, B/C Corridor	Orange Insulation	Friable	Good	See 061A
211061-A-061C	1st Floor, Area B-E, B Corridor	Orange Insulation	Friable	Good	See 061A
211061-A-061D	1st Floor, Area A, Corridor A	Orange Insulation	Friable	Good	See 061A
211061-A-061E	1st Floor, Area B-E, Corridor C	Orange Insulation	Friable	Good	See 061A
211061-A-062A	1st Floor, Area B-E, D4	Off White Wheat Tape	Non-Friable	Good	500 SF
211061-A-062B	1st Floor, Area B-E, D4	Off White Wheat Tape	Non-Friable	Good	See 062A
211061-A-062C	1st Floor, Area B-E, D4	Off White Wheat Tape	Non-Friable	Good	See 062A
211061-A-063A	1st Floor, Area A, A27	2' x 4' White Insulation Ceiling Tile	Friable	Good	600 SF
211061-A-063B	1st Floor, Area A, A27	2' x 4' White Insulation Ceiling Tile	Friable	Good	See 063A
211061-A-063C	1st Floor, Area A, A27	2' x 4' White Insulation Ceiling Tile	Friable	Good	See 063A


Client Sample Number: 211061-A-030A to 211061-A-063C

Total: 148

Relinquished By: 

Date: 4/14/2021

Time: 4:43 PM

Samples Received By: Sarah Tran 

Date: 4/14/21

Time: 4:44 pm

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

Analysis: PLM-Bulk EPA 600/R-93/116

Phone Number: (714) 434-6360

Turn Around Time: 5 Day

Fax Number: (714) 221-6360

Attn: Robert Williams

Results: Email to labs@atechinc.net

Project Number and Name: 211061 - LA DPW High Desert Hospital		Sampled By: Adrian Urbina			
Project Address: 44900 60th Street West		City: Lancaster	State: CA	Zip: 93536-7618	
Notes:					
Sample ID	Sample Location	Material	Friability	Condition	Est. Quantity
211061-A-064A	2nd Floor, Mechanical Room	Concrete	Non-Friable	Good	3,700 SF
211061-A-064B	2nd Floor, Mechanical Room	Concrete	Non-Friable	Good	See 064A
211061-A-064C	2nd Floor, Mechanical Room	Concrete	Non-Friable	Good	See 064A
211061-A-064D	2nd Floor, Mechanical Room	Concrete	Non-Friable	Good	See 064A
211061-A-064E	2nd Floor, Mechanical Room	Concrete	Non-Friable	Good	See 064A
211061-A-065A	2nd Floor, Mechanical Room	Gray Brick and Mortar	Non-Friable	Good	4,500 SF
211061-A-065B	2nd Floor, Mechanical Room	Gray Brick and Mortar	Non-Friable	Good	See 065A
211061-A-065C	2nd Floor, Mechanical Room	Gray Brick and Mortar	Non-Friable	Good	See 065A
211061-A-065D	2nd Floor, Mechanical Room	Gray Brick and Mortar	Non-Friable	Good	See 065A
211061-A-065E	2nd Floor, Mechanical Room	Gray Brick and Mortar	Non-Friable	Good	See 065A
211061-A-066A	2nd Floor, Mechanical Room	Fireproofing	Friable	Good	4,500 SF
211061-A-066B	2nd Floor, Mechanical Room	Fireproofing	Friable	Good	See 066A
211061-A-066C	2nd Floor, Mechanical Room	Fireproofing	Friable	Good	See 066A
211061-A-066D	2nd Floor, Mechanical Room	Fireproofing	Friable	Good	See 066A
211061-A-066E	2nd Floor, Mechanical Room	Fireproofing	Friable	Good	See 066A
211061-A-067A	2nd Floor, Mechanical Room	White Fiberglass Pipe Wrap	Friable	Good	200 SF
211061-A-067B	2nd Floor, Mechanical Room	White Fiberglass Pipe Wrap	Friable	Good	See 067A

Client Sample Number: 211061-A-064A to 211061-A-093C

Total: 116

Relinquished By: *[Signature]*

Date: 4/15/2021

Time: 5:56 PM

Samples Received By: *Jeanne Baez*

Date: 4/16/21

Time: 8:30 am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-067C	2nd Floor, Mechanical Room	White Fiberglass Pipe Wrap	Friable	Good	See 067A
211061-A-068A	2nd Floor, Mechanical Room	Light Brown Boiler TSI	Non-Friable	Good	200 SF
211061-A-068B	2nd Floor, Mechanical Room	Light Brown Boiler TSI	Non-Friable	Good	See 068A
211061-A-068C	2nd Floor, Mechanical Room	Light Brown Boiler TSI	Non-Friable	Good	See 068A
211061-A-069A	2nd Floor, Mechanical Room	White Laced-up Pipe Insulation	Non-Friable	Fair	60 SF
211061-A-069B	2nd Floor, Mechanical Room	White Laced-up Pipe Insulation	Non-Friable	Fair	See 069A
211061-A-069C	2nd Floor, Mechanical Room	White Laced-up Pipe Insulation	Non-Friable	Fair	See 069A
211061-A-070A	2nd Floor, Mechanical Room	Large Pipe TSI Wrap	Non-Friable	Good	500 SF
211061-A-070B	2nd Floor, Mechanical Room	Large Pipe TSI Wrap	Non-Friable	Good	See 070A
211061-A-070C	2nd Floor, Mechanical Room	Large Pipe TSI Wrap	Non-Friable	Good	See 070A
211061-A-071A	2nd Floor, Mechanical Room	Small Pipe TSI Wrap	Non-Friable	Good	600 SF
211061-A-071B	2nd Floor, Mechanical Room	Small Pipe TSI Wrap	Non-Friable	Good	See 071A
211061-A-071C	2nd Floor, Mechanical Room	Small Pipe TSI Wrap	Non-Friable	Good	See 071A
211061-A-072A	2nd Floor, HVAC Intake 3	Black HVAC Backing	Non-Friable	Fair	800 SF
211061-A-072B	2nd Floor, HVAC Intake 2	Black HVAC Backing	Non-Friable	Fair	See 072A
211061-A-072C	2nd Floor, HVAC Intake 1	Black HVAC Backing	Non-Friable	Fair	See 072A
211061-A-073A	2nd Floor, HVAC Intake 3	Black Wall Sealant	Non-Friable	Good	800 SF
211061-A-073B	2nd Floor, HVAC Intake 3	Black Wall Sealant	Non-Friable	Good	See 073A
211061-A-073C	2nd Floor, HVAC Intake 2	Black Wall Sealant	Non-Friable	Good	See 073A
211061-A-074A	2nd Floor, Mechanical Room	HVAC Tape	Non-Friable	Good	100 SF
211061-A-074B	2nd Floor, Mechanical Room	HVAC Tape	Non-Friable	Good	See 074A
211061-A-074C	2nd Floor, Mechanical Room	HVAC Tape	Non-Friable	Good	See 074A
211061-A-075A	2nd Floor, Mechanical Room	Stucco	Non-Friable	Good	120 SF
211061-A-075B	2nd Floor, Mechanical Room	Stucco	Non-Friable	Good	See 075A
211061-A-075C	2nd Floor, Stair	Stucco	Non-Friable	Good	See 075A
211061-A-076A	Exterior, Roof	Rolled Roof	Non-Friable	Good	80,000 SF
211061-A-076B	Exterior, Roof	Rolled Roof	Non-Friable	Good	See 076A

Client Sample Number: 211061-A-064A to 211061-A-093C

Total: 116

Relinquished By: 

Date: 4/15/2021

Time: 5:56 PM

Samples Received By: Sarah Tran 

Date: 4/16/21

Time: 8:30am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-076C	Exterior, Roof	Rolled Roof	Non-Friable	Good	See 076A
211061-A-076D	Exterior, Roof	Rolled Roof	Non-Friable	Good	See 076A
211061-A-076E	Exterior, Roof	Rolled Roof	Non-Friable	Good	See 076A
211061-A-076F	Exterior, Roof	Rolled Roof	Non-Friable	Good	See 076A
211061-A-076G	Exterior, Roof	Rolled Roof	Non-Friable	Good	See 076A
211061-A-077A	Exterior, Roof	Silver Putty	Non-Friable	Good	1,000 SF
211061-A-077A	Exterior, Roof	Silver Putty	Non-Friable	Good	1,000 SF
211061-A-077B	Exterior, Roof	Silver Putty	Non-Friable	Good	See 077A
211061-A-077C	Exterior, Roof	Silver Putty	Non-Friable	Good	See 077A
211061-A-077C	Exterior, Roof	Silver Putty	Non-Friable	Good	See 077A
211061-A-077D	Exterior, Roof	Silver Putty	Non-Friable	Good	See 077A
211061-A-077E	Exterior, Roof	Silver Putty	Non-Friable	Good	See 077A
211061-A-078A	Exterior, HVAC Platform	Exterior HVAC Tape	Non-Friable	Good	100 SF
211061-A-078B	Exterior, Roof	Exterior HVAC Tape	Non-Friable	Good	See 078A
211061-A-078C	Exterior, Roof	Exterior HVAC Tape	Non-Friable	Good	See 078A
211061-A-079A	Exterior, HVAC Platform	Black Flashing Caulking	Non-Friable	Good	40 SF
211061-A-079B	Exterior, Roof	Black Flashing Caulking	Non-Friable	Good	See 079A
211061-A-079C	Exterior, HVAC Platform	Black Flashing Caulking	Non-Friable	Good	See 079A
211061-A-080A	Exterior, Roof	Foil Wrap Insulation	Non-Friable	Fair	200 SF
211061-A-080B	Exterior, HVAC Platform	Foil Wrap Insulation	Non-Friable	Fair	See 080A
211061-A-080C	Exterior, HVAC Platform	Foil Wrap Insulation	Non-Friable	Fair	See 080A
211061-A-081A	Exterior, HVAC Platform	White Mounting Putty	Non-Friable	Good	200 SF
211061-A-081B	Exterior, Roof	White Mounting Putty	Non-Friable	Good	See 081A
211061-A-081C	Exterior, Roof	White Mounting Putty	Non-Friable	Good	See 081A
211061-A-082A	Exterior, Awning	Gray & Red Roof Shingles	Non-Friable	Good	200 SF
211061-A-082B	Exterior, Awning	Gray & Red Roof Shingles	Non-Friable	Good	See 082A
211061-A-082C	Exterior, Awning	Gray & Red Roof Shingles	Non-Friable	Good	See 082A

Client Sample Number: 211061-A-064A to 211061-A-093C

Total: 116

Relinquished By: 

Date: 4/15/2021

Time: 5:56 PM

Samples Received By: *Jeanne Bag* *J. Bag*

Date: 4/16/21

Time: 8:30am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-083A	Exterior, Awning	Loose Tar/Rock	Non-Friable	Good	200 SF
211061-A-083B	Exterior, Awning	Loose Tar/Rock	Non-Friable	Good	See 083A
211061-A-083C	Exterior, Awning	Loose Tar/Rock	Non-Friable	Good	See 083A
211061-A-084A	Exterior, Elevated Roof	Red Fire Stop	Non-Friable	Good	1 SF
211061-A-084B	Exterior, Elevated Roof	Red Fire Stop	Non-Friable	Good	See 084A
211061-A-084C	Exterior, Elevated Roof	Red Fire Stop	Non-Friable	Good	See 084A
211061-A-085A	Exterior, HVAC Platform	White Foil TSI	Non-Friable	Good	150 SF
211061-A-085B	Exterior, HVAC Platform	White Foil TSI	Non-Friable	Good	See 085A
211061-A-085C	Exterior, HVAC Platform	White Foil TSI	Non-Friable	Good	See 085A
211061-A-086A	Exterior, Exterior C	Stucco	Non-Friable	Good	10,000 SF
211061-A-086B	Exterior, Exterior C	Stucco	Non-Friable	Good	See 086A
211061-A-086C	Exterior, Exterior D	Stucco	Non-Friable	Good	See 086A
211061-A-086D	Exterior, Exterior A	Stucco	Non-Friable	Good	See 086A
211061-A-086E	Exterior, Exterior A	Stucco	Non-Friable	Good	See 086A
211061-A-086F	Exterior, Exterior B	Stucco	Non-Friable	Good	See 086A
211061-A-086G	Exterior, Exterior B	Stucco	Non-Friable	Good	See 086A
211061-A-087A	Exterior, Exterior C	Brick and Mortar	Non-Friable	Good	20,000 SF
211061-A-087B	Exterior, Exterior C	Brick and Mortar	Non-Friable	Good	See 087A
211061-A-087C	Exterior, Exterior D	Brick and Mortar	Non-Friable	Good	See 087A
211061-A-087D	Exterior, Exterior A	Brick and Mortar	Non-Friable	Good	See 087A
211061-A-087E	Exterior, Exterior A	Brick and Mortar	Non-Friable	Good	See 087A
211061-A-087F	Exterior, Exterior B	Brick and Mortar	Non-Friable	Good	See 087A
211061-A-087G	Exterior, Exterior B	Brick and Mortar	Non-Friable	Good	See 087A
211061-A-088A	Exterior, Exterior C	Concrete	Non-Friable	Good	20,000 SF
211061-A-088B	Exterior, Exterior C	Concrete	Non-Friable	Good	See 088A
211061-A-088C	Exterior, Exterior D	Concrete	Non-Friable	Good	See 088A
211061-A-088D	Exterior, Exterior A	Concrete	Non-Friable	Good	See 088A


Client Sample Number: 211061-A-064A to 211061-A-093C

Total: 116

Relinquished By: 

Date: 4/15/2021

Time: 5:56 PM

Samples Received By: Jeanne Baeg  Date: 4/15/21 Time: 8:30 am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-088E	Exterior, Exterior A	Concrete	Non-Friable	Good	See 088A
211061-A-088F	Exterior, Exterior B	Concrete	Non-Friable	Good	See 088A
211061-A-088G	Exterior, Exterior B	Concrete	Non-Friable	Good	See 088A
211061-A-089A	Basement, Mechanical Room	Concrete	Non-Friable	Good	900 SF
211061-A-089B	Basement, Mechanical Room	Concrete	Non-Friable	Good	See 089A
211061-A-089C	Basement, Mechanical Room	Concrete	Non-Friable	Good	See 089A
211061-A-090A	Basement, Mechanical Room	White Foil TSI Wrap	Non-Friable	Good	200 SF
211061-A-090B	Basement, Mechanical Room	White Foil TSI Wrap	Non-Friable	Good	See 090A
211061-A-090C	Basement, Mechanical Room	White Foil TSI Wrap	Non-Friable	Good	See 090A
211061-A-091A	Basement, Mechanical Room	White Laced Pipe Insulation	Non-Friable	Good	10 SF
211061-A-091B	Basement, Mechanical Room	White Laced Pipe Insulation	Non-Friable	Good	See 091A
211061-A-091C	Basement, Mechanical Room	White Laced Pipe Insulation	Non-Friable	Good	See 091A
211061-A-092A	Exterior, Exterior C	Red Laced Pipe Insulation	Non-Friable	Fair	10 SF
211061-A-092B	Exterior, Exterior C	Red Laced Pipe Insulation	Non-Friable	Fair	See 092A
211061-A-092C	Exterior, Exterior C	Red Laced Pipe Insulation	Non-Friable	Fair	See 092A
211061-A-093A	Basement, Mechanical Room	Yellow Ceiling Fiberglass Insulation	Friable	Good	60 SF
211061-A-093B	Basement, Mechanical Room	Yellow Ceiling Fiberglass Insulation	Friable	Good	See 093A
211061-A-093C	Basement, Mechanical Room	Yellow Ceiling Fiberglass Insulation	Friable	Good	See 093A


Client Sample Number: 211061-A-064A to 211061-A-093C

Total: 116

Relinquished By: 

Date: 4/15/2021

Time: 5:56 PM

Samples Received By: 

Date: 4/16/21

Time: 8:30 am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

Analysis: PLM-Bulk EPA 600/R-93/116

Phone Number: (714) 434-6360

Turn Around Time: 5 Day

Fax Number: (714) 221-6360


Attn: Robert Williams

Results: Email to labs@atechinc.net

Project Number and Name: 211061 - LA DPW High Desert Hospital		Sampled By: Adrian Urbina			
Project Address: 44900 60th Street West		City: Lancaster	State: CA	Zip: 93536-7618	
Notes:					
Sample ID	Sample Location	Material	Friability	Condition	Est. Quantity
211061-A-094A	B-13, 1st Floor, Open Area	12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	450 SF
211061-A-094B	B-13, 1st Floor, Open Area	12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 094A
211061-A-094C	B-13, 1st Floor, Open Area	12" x 12" Blue with Gray Stripes Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 094A
211061-A-095A	B-13, 1st Floor, Bank	12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	110 SF
211061-A-095B	B-13, 1st Floor, Bank	12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 095A
211061-A-095C	B-13, 1st Floor, Bank	12" x 12" Brown with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 095A
211061-A-096A	B-13, 1st Floor, Laundromat	12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	70 SF
211061-A-096B	B-13, 1st Floor, Laundromat	12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 096A
211061-A-096C	B-13, 1st Floor, Laundromat	12" x 12" Yellow with Red Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 096A
211061-A-097A	B-13, 1st Floor, Theater	Carpet Glue	Non-Friable	Good	200 SF


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: Sarah Tran 

Date: 4/30/21

Time: 8:30am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-097B	B-13, 1st Floor, Theater	Carpet Glue	Non-Friable	Good	See 097A
211061-A-097C	B-13, 1st Floor, Restaurant	Carpet Glue	Non-Friable	Good	See 097A
211061-A-098A	B-13, 1st Floor, Market	12" x 12" Brown with Olive Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	150 SF
211061-A-098B	B-13, 1st Floor, Market	12" x 12" Brown with Olive Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 098A
211061-A-098C	B-13, 1st Floor, Market	12" x 12" Brown with Olive Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 098A
211061-A-099A	B-13, 1st Floor, Market	12" x 12" Pink with Black and White Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	20 SF
211061-A-099B	B-13, 1st Floor, Market	12" x 12" Pink with Black and White Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 099A
211061-A-099C	B-13, 1st Floor, Market	12" x 12" Pink with Black and White Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 099A
211061-A-100A	B-13, 1st Floor, Open Area	Concrete	Non-Friable	Good	150 SF
211061-A-100B	B-13, 1st Floor, Open Area	Concrete	Non-Friable	Good	See 100A
211061-A-100C	B-13, 1st Floor, Open Area	Concrete	Non-Friable	Good	See 100A
211061-A-101A	B-13, 1st Floor, Market	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	25 SF
211061-A-101B	B-13, 1st Floor, Restaurant	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 101A
211061-A-101C	B-13, 1st Floor, Laundromat	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 101A
211061-A-102A	B-13, 1st Floor, Open Area	Drywall with Joint Compound	Non-Friable	Good	3,500 SF
211061-A-102B	B-13, 1st Floor, Open Area	Drywall with Joint Compound	Non-Friable	Good	See 102A
211061-A-102C	B-13, 1st Floor, Theater	Drywall with Joint Compound	Non-Friable	Good	See 102A
211061-A-102D	B-13, 1st Floor, Bathroom	Drywall with Joint Compound	Non-Friable	Good	See 102A
211061-A-102E	B-13, 1st Floor, Open Area	Drywall with Joint Compound	Non-Friable	Good	See 102A
211061-A-103A	B-13, 1st Floor, Open Area	Acoustic Spray-On	Friable	Good	1,500 SF
211061-A-103B	B-13, 1st Floor, Theater	Acoustic Spray-On	Friable	Good	See 103A
211061-A-103C	B-13, 1st Floor, Laundromat	Acoustic Spray-On	Friable	Good	See 103A


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-103D	B-13, 1st Floor, Open Area	Acoustic Spray-On	Friable	Good	See 103A
211061-A-103E	B-13, 1st Floor, Market	Acoustic Spray-On	Friable	Good	See 103A
211061-A-104A	B-13, 1st Floor, Open Area	6" Black Cove Base/Cove Base Mastic	Non-Friable	Good	10 SF
211061-A-104B	B-13, 1st Floor, Open Area	6" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 104A
211061-A-104C	B-13, 1st Floor, Theater	6" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 104A
211061-A-105A	B-13, Exterior, Exterior A	Exterior Stucco with Vapor Barrier	Non-Friable	Good	2,500 SF
211061-A-105B	B-13, Exterior, Exterior A	Exterior Stucco with Vapor Barrier	Non-Friable	Good	See 105A
211061-A-105C	B-13, Exterior, Exterior B	Exterior Stucco with Vapor Barrier	Non-Friable	Good	See 105A
211061-A-105D	B-13, Exterior, Exterior C	Exterior Stucco with Vapor Barrier	Non-Friable	Good	See 105A
211061-A-105E	B-13, Exterior, Exterior D	Exterior Stucco with Vapor Barrier	Non-Friable	Good	See 105A
211061-A-106A	B-13, Exterior, Exterior A	Concrete	Non-Friable	Good	400 SF
211061-A-106B	B-13, Exterior, Exterior A	Concrete	Non-Friable	Good	See 106A
211061-A-106C	B-13, Exterior, Exterior C	Concrete	Non-Friable	Good	See 106A
211061-A-107A	B-13, Exterior, Roof	Shingle Roof	Non-Friable	Good	1,500 SF
211061-A-107B	B-13, Exterior, Roof	Shingle Roof	Non-Friable	Good	See 107A
211061-A-107C	B-13, Exterior, Roof	Shingle Roof	Non-Friable	Good	See 107A
211061-A-107D	B-13, Exterior, Roof	Shingle Roof	Non-Friable	Good	See 107A
211061-A-107E	B-13, Exterior, Roof	Shingle Roof	Non-Friable	Good	See 107A
211061-A-108A	B-12, 1st Floor, Bathroom	12" x 12" Brown with Brown Streaks Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Fair	20 SF
211061-A-108B	B-12, 1st Floor, Bathroom	12" x 12" Brown with Brown Streaks Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Fair	See 108A
211061-A-108C	B-12, 1st Floor, Bathroom	12" x 12" Brown with Brown Streaks Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Fair	See 108A
211061-A-109A	B-12, 1st Floor, Open Area	Concrete	Non-Friable	Good	1,500 SF
211061-A-109B	B-12, 1st Floor, Open Area	Concrete	Non-Friable	Good	See 109A
211061-A-109C	B-12, 1st Floor, Open Area	Concrete	Non-Friable	Good	See 109A


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:


Time:

**PLM BULK SAMPLE CHAIN OF CUSTODY**

211061-A-109D	B-12, 1st Floor, Open Area	Concrete	Non-Friable	Good	See 109A
211061-A-109E	B-12, 1st Floor, Open Area	Concrete	Non-Friable	Good	See 109A
211061-A-110A	B-12, 1st Floor, Bathroom	Drywall with Joint Compound	Non-Friable	Good	80 SF
211061-A-110B	B-12, 1st Floor, Bathroom	Drywall with Joint Compound	Non-Friable	Good	See 110A
211061-A-110C	B-12, 1st Floor, Bathroom	Drywall with Joint Compound	Non-Friable	Good	See 110A
211061-A-111A	B-12, 1st Floor, Open Area	2' x 2' Fissured Ceiling Tile	Friable	Good	16 SF
211061-A-111B	B-12, 1st Floor, Open Area	2' x 2' Fissured Ceiling Tile	Friable	Good	See 111A
211061-A-111C	B-12, 1st Floor, Open Area	2' x 2' Fissured Ceiling Tile	Friable	Good	See 111A
211061-A-112A	B-12, 1st Floor, Open Area	2' x 4' Pitted Ceiling Tile	Friable	Good	1,450 SF
211061-A-112B	B-12, 1st Floor, Open Area	2' x 4' Pitted Ceiling Tile	Friable	Good	See 112A
211061-A-112C	B-12, 1st Floor, Open Area	2' x 4' Pitted Ceiling Tile	Friable	Good	See 112A
211061-A-112D	B-12, 1st Floor, Open Area	2' x 4' Pitted Ceiling Tile	Friable	Good	See 112A
211061-A-112E	B-12, 1st Floor, Open Area	2' x 4' Pitted Ceiling Tile	Friable	Good	See 112A
211061-A-113A	B-12, 1st Floor, Open Area	Insulation	Friable	Good	1,500 SF
211061-A-113B	B-12, 1st Floor, Open Area	Insulation	Friable	Good	See 113A
211061-A-113C	B-12, 1st Floor, Open Area	Insulation	Friable	Good	See 113A
211061-A-113D	B-12, 1st Floor, Open Area	Insulation	Friable	Good	See 113A
211061-A-113E	B-12, 1st Floor, Open Area	Insulation	Friable	Good	See 113A
211061-A-114A	B-12, 1st Floor, Bathroom	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	10 SF
211061-A-114B	B-12, 1st Floor, Bathroom	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 114A
211061-A-114C	B-12, 1st Floor, Bathroom	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 114A
211061-A-115A	B-12, Exterior, Exterior B	Foil Wrap Insulation	Non-Friable	Good	30 SF
211061-A-115B	B-12, Exterior, Exterior B	Foil Wrap Insulation	Non-Friable	Good	See 115A
211061-A-115C	B-12, Exterior, Exterior B	Foil Wrap Insulation	Non-Friable	Good	See 115A
211061-A-116A	B-12, Exterior, Exterior A	Stucco	Non-Friable	Good	200 SF
211061-A-116B	B-12, Exterior, Exterior D	Stucco	Non-Friable	Good	See 116A


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-116C	B-12, Exterior, Exterior C	Stucco	Non-Friable	Good	See 116A
211061-A-117A	Emergency Power Building, 1st Floor, Walkway	Concrete	Non-Friable	Good	550 SF
211061-A-117B	Emergency Power Building, 1st Floor, Walkway	Concrete	Non-Friable	Good	See 117A
211061-A-117C	Emergency Power Building, 1st Floor, Walkway	Concrete	Non-Friable	Good	See 117A
211061-A-118A	Emergency Power Building, 1st Floor, Walkway	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	15 SF
211061-A-118B	Emergency Power Building, 1st Floor, Walkway	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 118A
211061-A-118C	Emergency Power Building, 1st Floor, Walkway	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 118A
211061-A-119A	Emergency Power Building, 1st Floor, Walkway	Fireproofing	Friable	Good	200 SF
211061-A-119B	Emergency Power Building, 1st Floor, Walkway	Fireproofing	Friable	Good	See 119A
211061-A-119C	Emergency Power Building, 1st Floor, Generator Room	Fireproofing	Friable	Good	See 119A
211061-A-120A	Emergency Power Building, 1st Floor, Walkway	Drywall with Joint Compound	Non-Friable	Good	1,500 SF
211061-A-120B	Emergency Power Building, 1st Floor, Walkway	Drywall with Joint Compound	Non-Friable	Good	See 120A
211061-A-120C	Emergency Power Building, 1st Floor, Walkway	Drywall with Joint Compound	Non-Friable	Good	See 120A
211061-A-120D	Emergency Power Building, 1st Floor, Walkway	Drywall with Joint Compound	Non-Friable	Good	See 120A
211061-A-120E	Emergency Power Building, 1st Floor, Walkway	Drywall with Joint Compound	Non-Friable	Good	See 120A
211061-A-121A	Emergency Power Building, 1st Floor, Generator Room	Woven Pipe Wrap	Non-Friable	Good	10 SF
211061-A-121B	Emergency Power Building, 1st Floor, Generator Room	Woven Pipe Wrap	Non-Friable	Good	See 121A
211061-A-121C	Emergency Power Building, 1st Floor, Generator Room	Woven Pipe Wrap	Non-Friable	Good	See 121A
211061-A-122A	Emergency Power Building, Exterior, Exterior A	Brick and Mortar	Non-Friable	Good	1,200 SF
211061-A-122B	Emergency Power Building, Exterior, Exterior A	Brick and Mortar	Non-Friable	Good	See 122A
211061-A-122C	Emergency Power Building, Exterior, Exterior D	Brick and Mortar	Non-Friable	Good	See 122A
211061-A-122D	Emergency Power Building, Exterior, Exterior C	Brick and Mortar	Non-Friable	Good	See 122A
211061-A-122E	Emergency Power Building, Exterior, Exterior B	Brick and Mortar	Non-Friable	Good	See 122A

Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-123A	Emergency Power Building, Exterior, Roof	Rolled Roof	Non-Friable	Good	400 SF
211061-A-123B	Emergency Power Building, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 123A
211061-A-123C	Emergency Power Building, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 123A
211061-A-124A	Emergency Power Building, Exterior, Roof	Tan HVAC Putty	Non-Friable	Good	1 SF
211061-A-124B	Emergency Power Building, Exterior, Roof	Tan HVAC Putty	Non-Friable	Good	See 124A
211061-A-124C	Emergency Power Building, Exterior, Roof	Tan HVAC Putty	Non-Friable	Good	See 124A
211061-A-125A	Emergency Power Building, Exterior, Roof	Black Mounting Putty	Non-Friable	Good	10 SF
211061-A-125B	Emergency Power Building, Exterior, Roof	Black Mounting Putty	Non-Friable	Good	See 125A
211061-A-125C	Emergency Power Building, Exterior, Roof	Black Mounting Putty	Non-Friable	Good	See 125A
211061-A-126A	B-10, 1st Floor, Main Area	12" x 12" Brown with White Streaks Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	500 SF
211061-A-126B	B-10, 1st Floor, Main Area	12" x 12" Brown with White Streaks Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 126A
211061-A-126C	B-10, 1st Floor, Main Area	12" x 12" Brown with White Streaks Resilient Flooring/Resilient Floor Mastic	Non-Friable	Good	See 126A
211061-A-127A	B-10, 1st Floor, Bathroom 1	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	25 SF
211061-A-127B	B-10, 1st Floor, Bathroom 2	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 127A
211061-A-127C	B-10, 1st Floor, Main Area	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 127A
211061-A-128A	B-10, 1st Floor, Bathroom 1	Drywall with Joint Compound	Non-Friable	Good	900 SF
211061-A-128B	B-10, 1st Floor, Bathroom 2	Drywall with Joint Compound	Non-Friable	Good	See 128A
211061-A-128C	B-10, 1st Floor, Main Area	Drywall with Joint Compound	Non-Friable	Good	See 128A
211061-A-129A	B-10, 1st Floor, Main Area	2' x 4' Pitted Ceiling Tile	Friable	Good	450 SF
211061-A-129B	B-10, 1st Floor, Main Area	2' x 4' Pitted Ceiling Tile	Friable	Good	See 129A
211061-A-129C	B-10, 1st Floor, Main Area	2' x 4' Pitted Ceiling Tile	Friable	Good	See 129A
211061-A-130A	B-10, 1st Floor, Main Area	Insulation	Friable	Good	500 SF
211061-A-130B	B-10, 1st Floor, Main Area	Insulation	Friable	Good	See 130A
211061-A-130C	B-10, 1st Floor, Main Area	Insulation	Friable	Good	See 130A


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:


Samples Received By:

Date:

Time:

**PLM BULK SAMPLE CHAIN OF CUSTODY**

211061-A-131A	B-10, 1st Floor, Main Area	HVAC Tape	Non-Friable	Good	10 SF
211061-A-131B	B-10, 1st Floor, Main Area	HVAC Tape	Non-Friable	Good	See 131A
211061-A-131C	B-10, 1st Floor, Main Area	HVAC Tape	Non-Friable	Good	See 131A
211061-A-132A	B-10, Exterior, Roof	Rolled Roof	Non-Friable	Good	500 SF
211061-A-132B	B-10, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 132A
211061-A-132C	B-10, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 132A
211061-A-133A	B-10, Exterior, Roof	Silver Putty	Non-Friable	Good	1 SF
211061-A-133B	B-10, Exterior, Roof	Silver Putty	Non-Friable	Good	See 133A
211061-A-133C	B-10, Exterior, Roof	Silver Putty	Non-Friable	Good	See 133A
211061-A-134A	B-10, Exterior, Exterior A	Concrete	Non-Friable	Good	300 SF
211061-A-134B	B-10, Exterior, Exterior B	Concrete	Non-Friable	Good	See 134A
211061-A-134C	B-10, Exterior, Exterior C	Concrete	Non-Friable	Good	See 134A
211061-A-135A	Hazardous Waste, Exterior, Exterior A	Brick and Mortar	Non-Friable	Good	500 SF
211061-A-135B	Hazardous Waste, Exterior, Exterior C	Brick and Mortar	Non-Friable	Good	See 135A
211061-A-135C	Hazardous Waste, Exterior, Exterior D	Brick and Mortar	Non-Friable	Good	See 135A
211061-A-136A	Hazardous Waste, Exterior, Exterior C	Concrete	Non-Friable	Good	200 SF
211061-A-136B	Hazardous Waste, Exterior, Exterior A	Concrete	Non-Friable	Good	See 136A
211061-A-136C	Hazardous Waste, Exterior, Exterior A	Concrete	Non-Friable	Good	See 136A
211061-A-137A	Hazardous Waste, Exterior, Roof	Asphalt Roof	Non-Friable	Good	100 SF
211061-A-137B	Hazardous Waste, Exterior, Roof	Asphalt Roof	Non-Friable	Good	See 137A
211061-A-137C	Hazardous Waste, Exterior, Roof	Asphalt Roof	Non-Friable	Good	See 137A
211061-A-138A	B-02, 1st Floor, South Corridor	Carpet Glue	Non-Friable	Good	1,200 SF
211061-A-138B	B-02, 1st Floor, Doctors Office 1	Carpet Glue	Non-Friable	Good	See 138A
211061-A-138C	B-02, 1st Floor, South Corridor	Carpet Glue	Non-Friable	Good	See 138A
211061-A-138D	B-02, 1st Floor, Doctors Office 3	Carpet Glue	Non-Friable	Good	See 138A
211061-A-138E	B-02, 1st Floor, Doctors Office 4	Carpet Glue	Non-Friable	Good	See 138A
211061-A-139A	B-02, 1st Floor, Waiting Area	12" x 12" Blue with White Streaks Vinyl Tile	Non-Friable	Good	1,500 SF

Client Sample Number: 211061-A-094A to 211061-A-273C**Total:** 654**Relinquished By:** **Date:** 4/29/2021**Time:** 11:21 PM**Samples Received By:** **Date:** 4/30/21**Time:** 8:30a**Relinquished By:****Date:****Time:****Samples Received By:****Date:****Time:**

PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-139B	B-02, 1st Floor, Exam Room 2	12" x 12" Blue with White Streaks Vinyl Tile	Non-Friable	Good	See 139A
211061-A-139C	B-02, 1st Floor, Exam Room 6	12" x 12" Blue with White Streaks Vinyl Tile	Non-Friable	Good	See 139A
211061-A-139D	B-02, 1st Floor, Exam Room 4	12" x 12" Blue with White Streaks Vinyl Tile	Non-Friable	Good	See 139A
211061-A-139E	B-02, 1st Floor, Exam Room 1	12" x 12" Blue with White Streaks Vinyl Tile	Non-Friable	Good	See 139A
211061-A-140A	B-02, 1st Floor, Janitor	Dark Blue with White Spots Vinyl Sheeting	Non-Friable	Good	See 139A
211061-A-140B	B-02, 1st Floor, Lounge	Dark Blue with White Spots Vinyl Sheeting	Non-Friable	Good	150 SF
211061-A-140C	B-02, 1st Floor, Lounge	Dark Blue with White Spots Vinyl Sheeting	Non-Friable	Good	See 140A
211061-A-141A	B-02, 1st Floor, South Corridor	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 140A
211061-A-141B	B-02, 1st Floor, Charting	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	60 SF
211061-A-141C	B-02, 1st Floor, North Corridor	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 141A
211061-A-142A	B-02, 1st Floor, Medical Room	4" Dark Green Cove Base/Cove Base Mastic	Non-Friable	Good	See 141A
211061-A-142B	B-02, 1st Floor, Exam Room 3	4" Dark Green Cove Base/Cove Base Mastic	Non-Friable	Good	40 SF
211061-A-142C	B-02, 1st Floor, Exam Room 6	4" Dark Green Cove Base/Cove Base Mastic	Non-Friable	Good	See 142A
211061-A-143A	B-02, 1st Floor, Doctors Office 4	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 142A
211061-A-143B	B-02, 1st Floor, Doctors Office 4	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	5 SF
211061-A-143C	B-02, 1st Floor, Doctors Office 4	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 143A
211061-A-144A	B-02, 1st Floor, Waiting Area	Drywall with Joint Compound	Non-Friable	Good	See 143A
211061-A-144B	B-02, 1st Floor, Triage	Drywall with Joint Compound	Non-Friable	Good	6,100 SF
211061-A-144C	B-02, 1st Floor, Specialty Treatment Room	Drywall with Joint Compound	Non-Friable	Good	See 144A
211061-A-144D	B-02, 1st Floor, Exam Room 3	Drywall with Joint Compound	Non-Friable	Good	See 144A
211061-A-144E	B-02, 1st Floor, Charting	Drywall with Joint Compound	Non-Friable	Good	See 144A
211061-A-144F	B-02, 1st Floor, Medical Room	Drywall with Joint Compound	Non-Friable	Good	See 144A
211061-A-144G	B-02, 1st Floor, Utility Room	Drywall with Joint Compound	Non-Friable	Good	See 144A
211061-A-145A	B-02, 1st Floor, South Corridor	2' x 2' Pitted Ceiling Tile	Friable	Good	See 144A
					2,700 SF

ent Sample Number: 211061-A-094A to 211061-A-273C

inquished By:

Total: 654

ples Received By:

Date: 4/29/2021

Time: 11:21 PM

inquished By:

Date: 4/30/21

Time: 8:30a

ples Received By:

Date:

Time:

Date:

Time:

of Custody

**PLM BULK SAMPLE CHAIN OF CUSTODY**

211061-A-145B	B-02, 1st Floor, Lounge	2' x 2' Pitted Ceiling Tile	Friable	Good	See 145A
211061-A-145C	B-02, 1st Floor, Specialty Treatment Room	2' x 2' Pitted Ceiling Tile	Friable	Good	See 145A
211061-A-145D	B-02, 1st Floor, Triage	2' x 2' Pitted Ceiling Tile	Friable	Good	See 145A
211061-A-145E	B-02, 1st Floor, Waiting Area	2' x 2' Pitted Ceiling Tile	Friable	Good	See 145A
211061-A-146A	B-02, 1st Floor, Work Up Area	2' x 4' Fissured Ceiling Tile	Friable	Good	200 SF
211061-A-146B	B-02, 1st Floor, Work Up Area	2' x 4' Fissured Ceiling Tile	Friable	Good	See 146A
211061-A-146C	B-02, 1st Floor, Work Up Area	2' x 4' Fissured Ceiling Tile	Friable	Good	See 146A
211061-A-147A	B-02, 1st Floor, Waiting Area	Insulation	Friable	Good	2,900 SF
211061-A-147B	B-02, 1st Floor, North Corridor	Insulation	Friable	Good	See 147A
211061-A-147C	B-02, 1st Floor, Charting	Insulation	Friable	Good	See 147A
211061-A-147D	B-02, 1st Floor, South Corridor	Insulation	Friable	Good	See 147A
211061-A-147E	B-02, 1st Floor, South Corridor	Insulation	Friable	Good	See 147A
211061-A-148A	B-02, 1st Floor, Waiting Area	Foil Wrap	Non-Friable	Good	200 SF
211061-A-148B	B-02, 1st Floor, Waiting Area	Foil Wrap	Non-Friable	Good	See 148A
211061-A-148C	B-02, 1st Floor, Waiting Area	Foil Wrap	Non-Friable	Good	See 148A
211061-A-149A	B-02, Exterior, Exterior D	Black Putty	Non-Friable	Good	3 SF
211061-A-149B	B-02, Exterior, Exterior D	Black Putty	Non-Friable	Good	See 149A
211061-A-149C	B-02, Exterior, Exterior D	Black Putty	Non-Friable	Good	See 149A
211061-A-150A	B-02, Exterior, Exterior D	Foil Pipe Wrap with Insulation	Non-Friable	Good	5 SF
211061-A-150B	B-02, Exterior, Exterior D	Foil Pipe Wrap with Insulation	Non-Friable	Good	See 150A
211061-A-150C	B-02, Exterior, Exterior D	Foil Pipe Wrap with Insulation	Non-Friable	Good	See 150A
211061-A-151A	B-02, Exterior, Roof	Rolled Roof	Non-Friable	Good	2,850 SF
211061-A-151B	B-02, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 151A
211061-A-151C	B-02, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 151A
211061-A-151D	B-02, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 151A
211061-A-151E	B-02, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 151A
211061-A-152A	B-02, Exterior, Roof	Penetration Putty	Non-Friable	Good	10 SF


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-152B	B-02, Exterior, Roof	Penetration Putty	Non-Friable	Good	See 152A
211061-A-152C	B-02, Exterior, Roof	Penetration Putty	Non-Friable	Good	See 152A
211061-A-153A	B-03, 1st Floor, Peds Waiting Room	Light Gray Vinyl Sheeting	Non-Friable	Good	550 SF
211061-A-153B	B-03, 1st Floor, Peds Waiting Room	Light Gray Vinyl Sheeting	Non-Friable	Good	See 153A
211061-A-153C	B-03, 1st Floor, Peds Waiting Room	Light Gray Vinyl Sheeting	Non-Friable	Good	See 153A
211061-A-154A	B-03, 1st Floor, Registration	Carpet Glue with Vinyl Flooring	Non-Friable	Good	900 SF
211061-A-154B	B-03, 1st Floor, Registration	Carpet Glue with Vinyl Flooring	Non-Friable	Good	See 154A
211061-A-154C	B-03, 1st Floor, PFS Sup. Office	Carpet Glue with Vinyl Flooring	Non-Friable	Good	See 154A
211061-A-155A	B-03, 1st Floor, Peds Waiting Room	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	160 SF
211061-A-155B	B-03, 1st Floor, Registration	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 155A
211061-A-155C	B-03, 1st Floor, Ops	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 155A
211061-A-156A	B-03, 1st Floor, Peds Waiting Room	Drywall with Joint Compound	Non-Friable	Good	4,500 SF
211061-A-156B	B-03, 1st Floor, Registration	Drywall with Joint Compound	Non-Friable	Good	See 156A
211061-A-156C	B-03, 1st Floor, PFS Sup. Office	Drywall with Joint Compound	Non-Friable	Good	See 156A
211061-A-156D	B-03, 1st Floor, SGT Office	Drywall with Joint Compound	Non-Friable	Good	See 156A
211061-A-156E	B-03, 1st Floor, Storage	Drywall with Joint Compound	Non-Friable	Good	See 156A
211061-A-157A	B-03, 1st Floor, Peds Waiting Room	2' x 4' White Fissure Ceiling Tile	Friable	Good	800 SF
211061-A-157B	B-03, 1st Floor, Peds Waiting Room	2' x 4' White Fissure Ceiling Tile	Friable	Good	See 157A
211061-A-157C	B-03, 1st Floor, Registration	2' x 4' White Fissure Ceiling Tile	Friable	Good	See 157A
211061-A-158A	B-03, 1st Floor, Registration	Yellow Insulation	Friable	Good	600 SF
211061-A-158B	B-03, 1st Floor, Peds Waiting Room	Yellow Insulation	Friable	Good	See 158A
211061-A-158C	B-03, 1st Floor, Ops	Yellow Insulation	Friable	Good	See 158A
211061-A-159A	B-03, 1st Floor, Peds Waiting Room	Foil HVAC Tape	Non-Friable	Good	10 SF
211061-A-159B	B-03, 1st Floor, Registration	Foil HVAC Tape	Non-Friable	Good	See 159A
211061-A-159C	B-03, 1st Floor, Ops	Foil HVAC Tape	Non-Friable	Good	See 159A
211061-A-160A	B-03, 1st Floor, Ops	2' x 2' White Pitted Ceiling Tile	Friable	Good	650 SF


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-160B	B-03, 1st Floor, Report Room	2' x 2' White Pitted Ceiling Tile	Friable	Good	See 160A
211061-A-160C	B-03, 1st Floor, SGT Office	2' x 2' White Pitted Ceiling Tile	Friable	Good	See 160A
211061-A-161A	B-03, 1st Floor, Report Room	Glue with Leveling Compound	Non-Friable	Good	550 SF
211061-A-161B	B-03, 1st Floor, Storage	Glue with Leveling Compound	Non-Friable	Good	See 161A
211061-A-161C	B-03, 1st Floor, SGT Office	Glue with Leveling Compound	Non-Friable	Good	See 161A
211061-A-162A	B-03, Exterior, Exterior B	Foil Wrap Insulation	Non-Friable	Good	2 SF
211061-A-162B	B-03, Exterior, Exterior B	Foil Wrap Insulation	Non-Friable	Good	See 162A
211061-A-162C	B-03, Exterior, Exterior B	Foil Wrap Insulation	Non-Friable	Good	See 162A
211061-A-163A	B-03, Exterior, Exterior B	Black Putty	Non-Friable	Good	2 SF
211061-A-163B	B-03, Exterior, Exterior B	Black Putty	Non-Friable	Good	See 163A
211061-A-163C	B-03, Exterior, Exterior B	Black Putty	Non-Friable	Good	See 163A
211061-A-164A	B-03, Exterior, Roof	Penetration Putty	Non-Friable	Good	10 SF
211061-A-164B	B-03, Exterior, Roof	Penetration Putty	Non-Friable	Good	See 164A
211061-A-164C	B-03, Exterior, Roof	Penetration Putty	Non-Friable	Good	See 164A
211061-A-165A	B-05, 1st Floor, West Corridor	12" x 12" Brown with Dark Brown and White Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	2,500 SF
211061-A-165B	B-05, 1st Floor, Pharmacy	12" x 12" Brown with Dark Brown and White Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 165A
211061-A-165C	B-05, 1st Floor, Entry	12" x 12" Brown with Dark Brown and White Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 165A
211061-A-165D	B-05, 1st Floor, Main Lobby	12" x 12" Brown with Dark Brown and White Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 165A
211061-A-165E	B-05, 1st Floor, Exam Room 2	12" x 12" Brown with Dark Brown and White Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 165A
211061-A-166A	B-05, 1st Floor, Restroom 2	White Pebbled Vinyl Sheeting	Non-Friable	Good	110 SF
211061-A-166B	B-05, 1st Floor, Janitor	White Pebbled Vinyl Sheeting	Non-Friable	Good	See 166A
211061-A-166C	B-05, 1st Floor, Janitor	White Pebbled Vinyl Sheeting	Non-Friable	Good	See 166A
211061-A-167A	B-05, 1st Floor, Exam Room 3	12" x 12" Tan with Brown Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	90 SF


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-167B	B-05, 1st Floor, Exam Room 3	12" x 12" Tan with Brown Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 167A
211061-A-167C	B-05, 1st Floor, Exam Room 3	12" x 12" Tan with Brown Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 167A
211061-A-168A	B-05, 1st Floor, Restroom 4	Tan with Brown Vinyl Sheeting	Non-Friable	Good	70 SF
211061-A-168B	B-05, 1st Floor, Restroom 4	Tan with Brown Vinyl Sheeting	Non-Friable	Good	See 168A
211061-A-168C	B-05, 1st Floor, Restroom 4	Tan with Brown Vinyl Sheeting	Non-Friable	Good	See 168A
211061-A-169A	B-05, 1st Floor, Office 1	Carpet Glue	Non-Friable	Good	820 SF
211061-A-169B	B-05, 1st Floor, Office 3	Carpet Glue	Non-Friable	Good	See 169A
211061-A-169C	B-05, 1st Floor, Sitting Room	Carpet Glue	Non-Friable	Good	See 169A
211061-A-170A	B-05, 1st Floor, Main Lobby	6" Burgundy Cove Base/Cove Base Mastic	Non-Friable	Good	60 SF
211061-A-170B	B-05, 1st Floor, Pharmacy	6" Burgundy Cove Base/Cove Base Mastic	Non-Friable	Good	See 170A
211061-A-170C	B-05, 1st Floor, Exam Room 1	6" Burgundy Cove Base/Cove Base Mastic	Non-Friable	Good	See 170A
211061-A-171A	B-05, 1st Floor, Restroom 1	6" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	10 SF
211061-A-171B	B-05, 1st Floor, Office 3	6" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 171A
211061-A-171C	B-05, 1st Floor, Office 3	6" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 171A
211061-A-172A	B-05, 1st Floor, Sitting Room	6" Pink Cove Base/Cove Base Mastic	Non-Friable	Good	5 SF
211061-A-172B	B-05, 1st Floor, Sitting Room	6" Pink Cove Base/Cove Base Mastic	Non-Friable	Good	See 172A
211061-A-172C	B-05, 1st Floor, Sitting Room	6" Pink Cove Base/Cove Base Mastic	Non-Friable	Good	See 172A
211061-A-173A	B-05, 1st Floor, Cashier 2	6" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	20 SF
211061-A-173B	B-05, 1st Floor, Cashier 2	6" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 173A
211061-A-173C	B-05, 1st Floor, Cashier 2	6" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 173A
211061-A-174A	B-05, 1st Floor, Cashier 2	6" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	10 SF
211061-A-174B	B-05, 1st Floor, Cashier 2	6" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 174A
211061-A-174C	B-05, 1st Floor, Cashier 2	6" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 174A


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-175A	B-05, 1st Floor, Restroom 3	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	10 SF
211061-A-175B	B-05, 1st Floor, Restroom 3	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 175A
211061-A-175C	B-05, 1st Floor, Electrical Room	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 175A
211061-A-176A	B-05, 1st Floor, Restroom 4	4" Blue Cove Base/Cove Base Mastic	Non-Friable	Good	5 SF
211061-A-176B	B-05, 1st Floor, Restroom 4	4" Blue Cove Base/Cove Base Mastic	Non-Friable	Good	See 176A
211061-A-176C	B-05, 1st Floor, Restroom 4	4" Blue Cove Base/Cove Base Mastic	Non-Friable	Good	See 176A
211061-A-177A	B-05, 1st Floor, Pharmacy	Drywall with Joint Compound	Non-Friable	Good	7,500 SF
211061-A-177B	B-05, 1st Floor, Office 1	Drywall with Joint Compound	Non-Friable	Good	See 177A
211061-A-177C	B-05, 1st Floor, South Corridor	Drywall with Joint Compound	Non-Friable	Good	See 177A
211061-A-177D	B-05, 1st Floor, Pharmacy	Drywall with Joint Compound	Non-Friable	Good	See 177A
211061-A-177E	B-05, 1st Floor, Exam Room 1	Drywall with Joint Compound	Non-Friable	Good	See 177A
211061-A-177F	B-05, 1st Floor, Cashier 2	Drywall with Joint Compound	Non-Friable	Good	See 177A
211061-A-177G	B-05, 1st Floor, Main Lobby	Drywall with Joint Compound	Non-Friable	Good	See 177A
211061-A-178A	B-05, 1st Floor, Main Lobby	2' x 4' White Fissured Ceiling Tile	Friable	Good	3,000 SF
211061-A-178B	B-05, 1st Floor, Cashier 1	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 178A
211061-A-178C	B-05, 1st Floor, Office 3	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 178A
211061-A-178D	B-05, 1st Floor, Pharmacy	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 178A
211061-A-178E	B-05, 1st Floor, Cashier 2	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 178A
211061-A-179A	B-05, 1st Floor, Sitting Room	2' x 2' White Pitted Ceiling Tile	Non-Friable	Good	720 SF
211061-A-179B	B-05, 1st Floor, Sitting Room	2' x 2' White Pitted Ceiling Tile	Non-Friable	Good	See 179A
211061-A-179C	B-05, 1st Floor, Entry	2' x 2' White Pitted Ceiling Tile	Non-Friable	Good	See 179A
211061-A-180A	B-05, 1st Floor, Restroom 4	2' x 4' White Flat Ceiling Tile	Friable	Good	330 SF
211061-A-180B	B-05, 1st Floor, Restroom 1	2' x 4' White Flat Ceiling Tile	Friable	Good	See 180A
211061-A-180C	B-05, 1st Floor, Restroom 2	2' x 4' White Flat Ceiling Tile	Friable	Good	See 180A
211061-A-181A	B-05, 1st Floor, Pharmacy	Foil HVAC Wrap with Sealant	Non-Friable	Good	500 SF
211061-A-181B	B-05, 1st Floor, Cashier 1	Foil HVAC Wrap with Sealant	Non-Friable	Good	See 181A


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-181C	B-05, 1st Floor, Cashier 2	Foil HVAC Wrap with Sealant	Non-Friable	Good	See 181A
211061-A-182A	B-05, 1st Floor, Office 3	Yellow Insulation	Friable	Good	3,500 SF
211061-A-182B	B-05, 1st Floor, Office 3	Yellow Insulation	Friable	Good	See 182A
211061-A-182C	B-05, 1st Floor, Office 2	Yellow Insulation	Friable	Good	See 182A
211061-A-182D	B-05, 1st Floor, Cashier 1	Yellow Insulation	Friable	Good	See 182A
211061-A-182E	B-05, 1st Floor, Cashier 1	Yellow Insulation	Friable	Good	See 182A
211061-A-183A	B-05, 1st Floor, Restroom 1	2' x 4' Foil Wrapped Ceiling Tile	Friable	Good	32 SF
211061-A-183B	B-05, 1st Floor, Restroom 1	2' x 4' Foil Wrapped Ceiling Tile	Friable	Good	See 183A
211061-A-183C	B-05, 1st Floor, Restroom 1	2' x 4' Foil Wrapped Ceiling Tile	Friable	Good	See 183A
211061-A-184A	B-05, 1st Floor, Cashier 1	6" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	30 SF
211061-A-184B	B-05, 1st Floor, Office 1	6" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 184A
211061-A-184C	B-05, 1st Floor, Office 2	6" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 184A
211061-A-185A	B-03, Exterior, Roof	Woven Roof Material with Sealant	Non-Friable	Fair	1,400 SF
211061-A-185B	B-03, Exterior, Roof	Woven Roof Material with Sealant	Non-Friable	Fair	See 185A
211061-A-185C	B-03, Exterior, Roof	Woven Roof Material with Sealant	Non-Friable	Fair	See 185A
211061-A-185D	B-03, Exterior, Roof	Woven Roof Material with Sealant	Non-Friable	Fair	See 185A
211061-A-185E	B-03, Exterior, Roof	Woven Roof Material with Sealant	Non-Friable	Fair	See 185A
211061-A-186A	B-08, 1st Floor, South Corridor	Drywall with Joint Compound	Non-Friable	Good	6,000 SF
211061-A-186B	B-08, 1st Floor, Office 8	Drywall with Joint Compound	Non-Friable	Good	See 186A
211061-A-186C	B-08, 1st Floor, Office 10	Drywall with Joint Compound	Non-Friable	Good	See 186A
211061-A-186D	B-08, 1st Floor, Lounge	Drywall with Joint Compound	Non-Friable	Good	See 186A
211061-A-186E	B-08, 1st Floor, RR 1	Drywall with Joint Compound	Non-Friable	Good	See 186A
211061-A-186F	B-08, 1st Floor, Office 1	Drywall with Joint Compound	Non-Friable	Good	See 186A
211061-A-186G	B-08, 1st Floor, Administration	Drywall with Joint Compound	Non-Friable	Good	See 186A
211061-A-187A	B-08, 1st Floor, Administration	12" x 12" White with Black and Blue Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	1,300 SF


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30 AM

Relinquished By:

Date:

Time:

Samples Received By:


Date:

Time:

**PLM BULK SAMPLE CHAIN OF CUSTODY**


211061-A-187B	B-08, 1st Floor, East Corridor	12" x 12" White with Black and Blue Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	See 187A
211061-A-187C	B-08, 1st Floor, Lounge	12" x 12" White with Black and Blue Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	See 187A
211061-A-187D	B-08, 1st Floor, South Corridor	12" x 12" White with Black and Blue Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	See 187A
211061-A-187E	B-08, 1st Floor, Lounge	12" x 12" White with Black and Blue Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	See 187A
211061-A-188A	B-08, 1st Floor, South Corridor	2' x 4' White Fissured Ceiling Tile	Friable	Fair	2,800 SF
211061-A-188B	B-08, 1st Floor, West Corridor	2' x 4' White Fissured Ceiling Tile	Friable	Fair	See 188A
211061-A-188C	B-08, 1st Floor, Office 10	2' x 4' White Fissured Ceiling Tile	Friable	Fair	See 188A
211061-A-188D	B-08, 1st Floor, Lounge	2' x 4' White Fissured Ceiling Tile	Friable	Fair	See 188A
211061-A-188E	B-08, 1st Floor, Electrical	2' x 4' White Fissured Ceiling Tile	Friable	Fair	See 188A
211061-A-189A	B-08, 1st Floor, Office 2	4" Green Cove Base/Cove Base Mastic	Non-Friable	Good	200 SF
211061-A-189B	B-08, 1st Floor, Office 4	4" Green Cove Base/Cove Base Mastic	Non-Friable	Good	See 189A
211061-A-189C	B-08, 1st Floor, Office 7	4" Green Cove Base/Cove Base Mastic	Non-Friable	Good	See 189A
211061-A-190A	B-08, 1st Floor, RR 2	Brown Speckled Vinyl Sheeting	Non-Friable	Good	100 SF
211061-A-190B	B-08, 1st Floor, RR 2	Brown Speckled Vinyl Sheeting	Non-Friable	Good	See 190A
211061-A-190C	B-08, 1st Floor, RR 2	Brown Speckled Vinyl Sheeting	Non-Friable	Good	See 190A
211061-A-191A	B-08, 1st Floor, Office 3	Carpet Glue	Non-Friable	Good	1,300 SF
211061-A-191B	B-08, 1st Floor, Office 1	Carpet Glue	Non-Friable	Good	See 191A
211061-A-191C	B-08, 1st Floor, Office 5	Carpet Glue	Non-Friable	Good	See 191A
211061-A-191D	B-08, 1st Floor, Lounge	Carpet Glue	Non-Friable	Good	See 191A
211061-A-191E	B-08, 1st Floor, Office 10	Carpet Glue	Non-Friable	Good	See 191A
211061-A-192A	B-08, Exterior, Exterior A	Concrete	Non-Friable	Good	400 SF
211061-A-192B	B-08, Exterior, Exterior B	Concrete	Non-Friable	Good	See 192A
211061-A-192C	B-08, Exterior, Exterior C	Concrete	Non-Friable	Good	See 192A

Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-193A	B-08, Exterior, Roof	White Roof Material	Non-Friable	Good	2,800 SF
211061-A-193B	B-08, Exterior, Roof	White Roof Material	Non-Friable	Good	See 193A
211061-A-193C	B-08, Exterior, Roof	White Roof Material	Non-Friable	Good	See 193A
211061-A-193D	B-08, Exterior, Roof	White Roof Material	Non-Friable	Good	See 193A
211061-A-193E	B-08, Exterior, Roof	White Roof Material	Non-Friable	Good	See 193A
211061-A-194A	B-08, Exterior, Roof	Black Penetration Putty	Non-Friable	Good	3 SF
211061-A-194B	B-08, Exterior, Roof	Black Penetration Putty	Non-Friable	Good	See 194A
211061-A-194C	B-08, Exterior, Roof	Black Penetration Putty	Non-Friable	Good	See 194A
211061-A-195A	B-08, Exterior, Exterior A	White HVAC Caulking	Non-Friable	Good	1 SF
211061-A-195B	B-08, Exterior, Exterior A	White HVAC Caulking	Non-Friable	Good	See 195A
211061-A-195C	B-08, Exterior, Exterior A	White HVAC Caulking	Non-Friable	Good	See 195A
211061-A-196A	B-08, Exterior, Exterior A	Brown HVAC Caulking	Non-Friable	Good	10 SF
211061-A-196B	B-08, Exterior, Exterior A	Brown HVAC Caulking	Non-Friable	Good	See 196A
211061-A-196C	B-08, Exterior, Exterior A	Brown HVAC Caulking	Non-Friable	Good	See 196A
211061-A-197A	B-08, Exterior, Exterior A	HVAC Tape	Non-Friable	Good	3 SF
211061-A-197B	B-08, Exterior, Exterior A	HVAC Tape	Non-Friable	Good	See 197A
211061-A-197C	B-08, Exterior, Exterior D	HVAC Tape	Non-Friable	Good	See 197A
211061-A-198A	B-07, 1st Floor, Library	Carpet Glue	Non-Friable	Good	2,500 SF
211061-A-198B	B-07, 1st Floor, Waiting Area	Carpet Glue	Non-Friable	Good	See 198A
211061-A-198C	B-07, 1st Floor, Office 8	Carpet Glue	Non-Friable	Good	See 198A
211061-A-198D	B-07, 1st Floor, Office 7	Carpet Glue	Non-Friable	Good	See 198A
211061-A-198E	B-07, 1st Floor, Office 1	Carpet Glue	Non-Friable	Good	See 198A
211061-A-199A	B-07, 1st Floor, Restroom 2	12" x 12" Gray with White Streaks Vinyl Floor Tile/Vinyl Flooring Mastic	Non-Friable	Good	500 SF
211061-A-199B	B-07, 1st Floor, Restroom 1	12" x 12" Gray with White Streaks Vinyl Floor Tile/Vinyl Flooring Mastic	Non-Friable	Good	See 199A
211061-A-199C	B-07, 1st Floor, Janitor	12" x 12" Gray with White Streaks Vinyl Floor Tile/Vinyl Flooring Mastic	Non-Friable	Good	See 199A

Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:

**PLM BULK SAMPLE CHAIN OF CUSTODY**

211061-A-200A	B-07, 1st Floor, Office 13	4" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	150 SF
211061-A-200B	B-07, 1st Floor, Office 8	4" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 200A
211061-A-200C	B-07, 1st Floor, Office 5	4" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 200A
211061-A-201A	B-07, 1st Floor, North Corridor	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	150 SF
211061-A-201B	B-07, 1st Floor, West Corridor	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 201A
211061-A-201C	B-07, 1st Floor, Waiting Area	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 201A
211061-A-202A	B-07, 1st Floor, Restroom 3	6" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	20 SF
211061-A-202B	B-07, 1st Floor, Restroom 3	6" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 202A
211061-A-202C	B-07, 1st Floor, Restroom 4	6" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 202A
211061-A-203A	B-07, 1st Floor, Restroom 1	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	20 SF
211061-A-203B	B-07, 1st Floor, Restroom 1	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 203A
211061-A-203C	B-07, 1st Floor, Restroom 2	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 203A
211061-A-204A	B-07, 1st Floor, Office 4	Drywall with Joint Compound	Non-Friable	Good	7,000 SF
211061-A-204B	B-07, 1st Floor, Restroom 1	Drywall with Joint Compound	Non-Friable	Good	See 204A
211061-A-204C	B-07, 1st Floor, Library	Drywall with Joint Compound	Non-Friable	Good	See 204A
211061-A-204D	B-07, 1st Floor, Waiting Area	Drywall with Joint Compound	Non-Friable	Good	See 204A
211061-A-204E	B-07, 1st Floor, Office 8	Drywall with Joint Compound	Non-Friable	Good	See 204A
211061-A-204F	B-07, 1st Floor, Office 1	Drywall with Joint Compound	Non-Friable	Good	See 204A
211061-A-204G	B-07, 1st Floor, Office 7	Drywall with Joint Compound	Non-Friable	Good	See 204A
211061-A-205A	B-07, 1st Floor, West Corridor	2' x 4' White Pitted Ceiling Tile	Friable	Good	3,000 SF
211061-A-205B	B-07, 1st Floor, Office 10	2' x 4' White Pitted Ceiling Tile	Friable	Good	See 205A
211061-A-205C	B-07, 1st Floor, North Corridor	2' x 4' White Pitted Ceiling Tile	Friable	Good	See 205A
211061-A-205D	B-07, 1st Floor, Office 4	2' x 4' White Pitted Ceiling Tile	Friable	Good	See 205A
211061-A-205E	B-07, 1st Floor, Office 3	2' x 4' White Pitted Ceiling Tile	Friable	Good	See 205A
211061-A-206A	B-07, 1st Floor, Office 1	Foil Wrap HVAC Tape	Non-Friable	Good	200 SF


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-206B	B-07, 1st Floor, Office 4	Foil Wrap HVAC Tape	Non-Friable	Good	See 206A
211061-A-206C	B-07, 1st Floor, Office 3	Foil Wrap HVAC Tape	Non-Friable	Good	See 206A
211061-A-207A	B-07, Exterior, Exterior A	Stucco on Concrete	Non-Friable	Good	400 SF
211061-A-207B	B-07, Exterior, Exterior A	Stucco on Concrete	Non-Friable	Good	See 207A
211061-A-207C	B-07, Exterior, Exterior D	Stucco on Concrete	Non-Friable	Good	See 207A
211061-A-208A	B-07, Exterior, Roof	Rolled Roof	Non-Friable	Good	3,000 SF
211061-A-208B	B-07, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 208A
211061-A-208C	B-07, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 208A
211061-A-208D	B-07, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 208A
211061-A-208E	B-07, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 208A
211061-A-209A	B-07, Exterior, Roof	Silver Penetration Putty	Non-Friable	Good	10 SF
211061-A-209B	B-07, Exterior, Roof	Silver Penetration Putty	Non-Friable	Good	See 209A
211061-A-209C	B-07, Exterior, Roof	Silver Penetration Putty	Non-Friable	Good	See 209A
211061-A-210A	B-01, 1st Floor, Main Corridor	Blue with White and Black Vinyl Sheeting	Non-Friable	Good	1,100 SF
211061-A-210B	B-01, 1st Floor, Restroom Handicapped	Blue with White and Black Vinyl Sheeting	Non-Friable	Good	See 210A
211061-A-210C	B-01, 1st Floor, West Corridor	Blue with White and Black Vinyl Sheeting	Non-Friable	Good	See 210A
211061-A-210D	B-01, 1st Floor, West Corridor	Blue with White and Black Vinyl Sheeting	Non-Friable	Good	See 210A
211061-A-210E	B-01, 1st Floor, East Corridor	Blue with White and Black Vinyl Sheeting	Non-Friable	Good	See 210A
211061-A-211A	B-01, 1st Floor, W/H Closet	12" x 12" Blue with White Streaked Vinyl Floor Tile/Vinyl Flooring Mastic	Non-Friable	Good	20 SF
211061-A-211B	B-01, 1st Floor, W/H Closet	12" x 12" Blue with White Streaked Vinyl Floor Tile/Vinyl Flooring Mastic	Non-Friable	Good	See 211A
211061-A-211C	B-01, 1st Floor, W/H Closet	12" x 12" Blue with White Streaked Vinyl Floor Tile/Vinyl Flooring Mastic	Non-Friable	Good	See 211A
211061-A-212A	B-01, 1st Floor, Medical Social Workers Director	Carpet Glue	Non-Friable	Good	3,400 SF
211061-A-212B	B-01, 1st Floor, Volunteer Director	Carpet Glue	Non-Friable	Good	See 212A


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-212C	B-01, 1st Floor, Patient Financial Services Workers	Carpet Glue	Non-Friable	Good	See 212A
211061-A-212D	B-01, 1st Floor, Conference Room	Carpet Glue	Non-Friable	Good	See 212A
211061-A-212E	B-01, 1st Floor, Tel/Comm	Carpet Glue	Non-Friable	Good	See 212A
211061-A-213A	B-01, 1st Floor, MSW Office 1	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	150 SF
211061-A-213B	B-01, 1st Floor, Utilization Review Office	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 213A
211061-A-213C	B-01, 1st Floor, Community Health Plan	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 213A
211061-A-214A	B-01, 1st Floor, East Corridor	4" Cream Cove Base/Cove Base Mastic	Non-Friable	Good	150 SF
211061-A-214B	B-01, 1st Floor, Main Corridor	4" Cream Cove Base/Cove Base Mastic	Non-Friable	Good	See 214A
211061-A-214C	B-01, 1st Floor, West Corridor	4" Cream Cove Base/Cove Base Mastic	Non-Friable	Good	See 214A
211061-A-215A	B-01, 1st Floor, W/H Closet	4" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	10 SF
211061-A-215B	B-01, 1st Floor, Patient Financial Services Workers	4" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 215A
211061-A-215C	B-01, 1st Floor, Tel/Comm	4" Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 215A
211061-A-216A	B-01, 1st Floor, Restroom Handicapped	Drywall with Joint Compound	Non-Friable	Good	9,000 SF
211061-A-216B	B-01, 1st Floor, Volunteers	Drywall with Joint Compound	Non-Friable	Good	See 216A
211061-A-216C	B-01, 1st Floor, MSW Office 4	Drywall with Joint Compound	Non-Friable	Good	See 216A
211061-A-216D	B-01, 1st Floor, Nursing Inservice Director	Drywall with Joint Compound	Non-Friable	Good	See 216A
211061-A-216E	B-01, 1st Floor, PFSW Supervisor	Drywall with Joint Compound	Non-Friable	Good	See 216A
211061-A-216F	B-01, 1st Floor, Community Health Plan	Drywall with Joint Compound	Non-Friable	Good	See 216A
211061-A-216G	B-01, 1st Floor, Conference Room	Drywall with Joint Compound	Non-Friable	Good	See 216A
211061-A-217A	B-01, 1st Floor, Medical Social Workers Director	2' x 4' White Pitted Ceiling Tile	Friable	Good	4,500 SF
211061-A-217B	B-01, 1st Floor, Conference Room	2' x 4' White Pitted Ceiling Tile	Friable	Good	See 217A
211061-A-217C	B-01, 1st Floor, PFSW Supervisor	2' x 4' White Pitted Ceiling Tile	Friable	Good	See 217A
211061-A-217D	B-01, 1st Floor, Volunteers	2' x 4' White Pitted Ceiling Tile	Friable	Good	See 217A
211061-A-217E	B-01, 1st Floor, Nursing Inservice	2' x 4' White Pitted Ceiling Tile	Friable	Good	See 217A
211061-A-218A	B-01, 1st Floor, Conference Room	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	50 SF

Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By:

Date: 4/29/2021

Time: 11:21 PM

Samples Received By:

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-218B	B-01, 1st Floor, Conference Room	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 218A
211061-A-218C	B-01, 1st Floor, Conference Room	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 218A
211061-A-219A	B-01, Exterior, Exterior D	Brick and Mortar	Non-Friable	Good	300 SF
211061-A-219B	B-01, Exterior, Exterior A	Brick and Mortar	Non-Friable	Good	See 219A
211061-A-219C	B-01, Exterior, Exterior A	Brick and Mortar	Non-Friable	Good	See 219A
211061-A-220A	B-01, Exterior, Roof	Rolled Roof	Non-Friable	Good	4,500 SF
211061-A-220B	B-01, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 220A
211061-A-220C	B-01, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 220A
211061-A-220D	B-01, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 220A
211061-A-220E	B-01, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 220A
211061-A-221A	B-01, Exterior, Roof	Silver Penetration Putty	Non-Friable	Good	10 SF
211061-A-221B	B-01, Exterior, Roof	Silver Penetration Putty	Non-Friable	Good	See 221A
211061-A-221C	B-01, Exterior, Roof	Silver Penetration Putty	Non-Friable	Good	See 221A
211061-A-222A	B-05, Exterior, Exterior A	Brick and Mortar	Non-Friable	Good	550 SF
211061-A-222B	B-05, Exterior, Exterior B	Brick and Mortar	Non-Friable	Good	See 222A
211061-A-222C	B-05, Exterior, Exterior D	Brick and Mortar	Non-Friable	Good	See 222A
211061-A-223A	B-05, Exterior, Roof	Rolled Roof	Non-Friable	Good	2,500 SF
211061-A-223B	B-05, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 223A
211061-A-223C	B-05, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 223A
211061-A-223D	B-05, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 223A
211061-A-223E	B-05, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 223A
211061-A-224A	B-05, Exterior, Roof	Brown Penetration Putty	Non-Friable	Good	10 SF
211061-A-224B	B-05, Exterior, Roof	Brown Penetration Putty	Non-Friable	Good	See 224A
211061-A-224C	B-05, Exterior, Roof	Brown Penetration Putty	Non-Friable	Good	See 224A
211061-A-225A	B-04, 1st Floor, East Corridor	12" x 12" White with Brown Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	5,400 SF
211061-A-225B	B-04, 1st Floor, Waiting Area	12" x 12" White with Brown Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	See 225A

Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:


Time:

**PLM BULK SAMPLE CHAIN OF CUSTODY**

211061-A-225C	B-04, 1st Floor, Psychology Room 113	12" x 12" White with Brown Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	See 225A
211061-A-225D	B-04, 1st Floor, Nurse Med. Room	12" x 12" White with Brown Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	See 225A
211061-A-225E	B-04, 1st Floor, SSN Room 114	12" x 12" White with Brown Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	See 225A
211061-A-225F	B-04, 1st Floor, Staff Lounge	12" x 12" White with Brown Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	See 225A
211061-A-225G	B-04, 1st Floor, Exam 5	12" x 12" White with Brown Streaks Vinyl Floor Tile/Vinyl Floor Mastic	Non-Friable	Good	See 225A
211061-A-226A	B-04, 1st Floor, Entry	12" x 12" Tan with Brown and White Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	400 SF
211061-A-226B	B-04, 1st Floor, Entry	12" x 12" Tan with Brown and White Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 226A
211061-A-226C	B-04, 1st Floor, Prisoner Waiting Area	12" x 12" Tan with Brown and White Stripes Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 226A
211061-A-227A	B-04, 1st Floor, Exam 13	12" x 12" Orange Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	50 SF
211061-A-227B	B-04, 1st Floor, Exam 13	12" x 12" Orange Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 227A
211061-A-227C	B-04, 1st Floor, Exam 13	12" x 12" Orange Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 227A
211061-A-228A	B-04, 1st Floor, Staff Restroom	Tan Vinyl Sheeting	Non-Friable	Good	600 SF
211061-A-228B	B-04, 1st Floor, Exam 10	Tan Vinyl Sheeting	Non-Friable	Good	See 228A
211061-A-228C	B-04, 1st Floor, Restroom 2	Tan Vinyl Sheeting	Non-Friable	Good	See 228A
211061-A-229A	B-04, 1st Floor, Employee Health	Tan Speckled Vinyl Sheeting	Non-Friable	Good	700 SF
211061-A-229B	B-04, 1st Floor, Triage 1	Tan Speckled Vinyl Sheeting	Non-Friable	Good	See 229A
211061-A-229C	B-04, 1st Floor, Restroom 1	Tan Speckled Vinyl Sheeting	Non-Friable	Good	See 229A
211061-A-230A	B-04, 1st Floor, East Corridor	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	300 SF
211061-A-230B	B-04, 1st Floor, West Corridor	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 230A
211061-A-230C	B-04, 1st Floor, Waiting Area	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 230A
211061-A-231A	B-04, 1st Floor, Comm Rm 110	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	300 SF
211061-A-231B	B-04, 1st Floor, Exam 14	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 231A

Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30m

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-231C	B-04, 1st Floor, Spec. 3	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 231A
211061-A-232A	B-04, 1st Floor, Equipment Supply	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	
211061-A-232B	B-04, 1st Floor, Equipment Supply	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 232A
211061-A-232C	B-04, 1st Floor, Equipment Supply	4" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 232A
211061-A-233A	B-04, 1st Floor, Exam 13	4" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	10 SF
211061-A-233B	B-04, 1st Floor, Exam 13	4" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 233A
211061-A-233C	B-04, 1st Floor, Exam 13	4" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 233A
211061-A-234A	B-04, 1st Floor, Entry	6" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	150 SF
211061-A-234B	B-04, 1st Floor, Entry	6" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 234A
211061-A-234C	B-04, 1st Floor, Prisoner Waiting Area	6" Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 234A
211061-A-235A	B-04, 1st Floor, Staff Lounge	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	20 SF
211061-A-235B	B-04, 1st Floor, Staff Lounge	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 235A
211061-A-235C	B-04, 1st Floor, Staff Lounge	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 235A
211061-A-236A	B-04, 1st Floor, Supply Room 108	Drywall with Joint Compound	Non-Friable	Good	15,000 SF
211061-A-236B	B-04, 1st Floor, Observation Room 102	Drywall with Joint Compound	Non-Friable	Good	See 236A
211061-A-236C	B-04, 1st Floor, 118	Drywall with Joint Compound	Non-Friable	Good	See 236A
211061-A-236D	B-04, 1st Floor, Nurse's Station	Drywall with Joint Compound	Non-Friable	Good	See 236A
211061-A-236E	B-04, 1st Floor, Waiting Area	Drywall with Joint Compound	Non-Friable	Good	See 236A
211061-A-236F	B-04, 1st Floor, Exam 10	Drywall with Joint Compound	Non-Friable	Good	See 236A
211061-A-236G	B-04, 1st Floor, West Corridor	Drywall with Joint Compound	Non-Friable	Good	See 236A
211061-A-237A	B-04, 1st Floor, Supply Room 108	2' x 4' White Fissured Ceiling Tile	Friable	Good	7,200 SF
211061-A-237B	B-04, 1st Floor, Observation Room 102	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 237A
211061-A-237C	B-04, 1st Floor, 118	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 237A
211061-A-237D	B-04, 1st Floor, Nurse's Station	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 237A


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:

**PLM BULK SAMPLE CHAIN OF CUSTODY**

211061-A-237E	B-04, 1st Floor, Waiting Area	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 237A
211061-A-237F	B-04, 1st Floor, Exam 10	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 237A
211061-A-237G	B-04, 1st Floor, West Corridor	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 237A
211061-A-238A	B-04, 1st Floor, Supply Room 108	Foil HVAC Insulation	Non-Friable	Good	300 SF
211061-A-238B	B-04, 1st Floor, Exam 5	Foil HVAC Insulation	Non-Friable	Good	See 238A
211061-A-238C	B-04, 1st Floor, Nurse's Station	Foil HVAC Insulation	Non-Friable	Good	See 238A
211061-A-239A	B-04, Exterior, Roof	Rolled Roof	Non-Friable	Good	7,200 SF
211061-A-239B	B-04, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 239A
211061-A-239C	B-04, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 239A
211061-A-239D	B-04, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 239A
211061-A-239E	B-04, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 239A
211061-A-239F	B-04, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 239A
211061-A-239G	B-04, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 239A
211061-A-240A	B-04, Exterior, Roof	Black Penetration Putty	Non-Friable	Good	10 SF
211061-A-240B	B-04, Exterior, Roof	Black Penetration Putty	Non-Friable	Good	See 240A
211061-A-240C	B-04, Exterior, Roof	Black Penetration Putty	Non-Friable	Good	See 240A
211061-A-241A	B-11, 1st Floor, Kitchen	12" x 12" Tan with Brown and White Streaks Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	400 SF
211061-A-241B	B-11, 1st Floor, Kitchen	12" x 12" Tan with Brown and White Streaks Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 241A
211061-A-241C	B-11, 1st Floor, Restroom	12" x 12" Tan with Brown and White Streaks Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 241A
211061-A-242A	B-11, 1st Floor, Office 1	Carpet Glue	Non-Friable	Good	1,600 SF
211061-A-242B	B-11, 1st Floor, Conference Room	Carpet Glue	Non-Friable	Good	See 242A
211061-A-242C	B-11, 1st Floor, Administration	Carpet Glue	Non-Friable	Good	See 242A
211061-A-242D	B-11, 1st Floor, Hallway	Carpet Glue	Non-Friable	Good	See 242A
211061-A-242E	B-11, 1st Floor, Office 4	Carpet Glue	Non-Friable	Good	See 242A


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30am

Relinquished By:

Date:

Time:

Samples Received By:

Date:


Time:

**PLM BULK SAMPLE CHAIN OF CUSTODY**

211061-A-243A	B-11, 1st Floor, Weight Room	12" x 12" Tan with Brown Streaks Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	300 SF
211061-A-243B	B-11, 1st Floor, Weight Room	12" x 12" Tan with Brown Streaks Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 243A
211061-A-243C	B-11, 1st Floor, Weight Room	12" x 12" Tan with Brown Streaks Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 243A
211061-A-244A	B-11, 1st Floor, Work Area	Concrete	Non-Friable	Good	900 SF
211061-A-244B	B-11, 1st Floor, Work Area	Concrete	Non-Friable	Good	See 244A
211061-A-244C	B-11, 1st Floor, Work Area	Concrete	Non-Friable	Good	See 244A
211061-A-245A	B-11, 1st Floor, Kitchen 2	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	60 SF
211061-A-245B	B-11, 1st Floor, Kitchen 2	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 245A
211061-A-245C	B-11, 1st Floor, Entry	6" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 245A
211061-A-246A	B-11, 1st Floor, Office 3	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	150 SF
211061-A-246B	B-11, 1st Floor, Conference Room	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 246A
211061-A-246C	B-11, 1st Floor, Weight Room	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 246A
211061-A-247A	B-11, 1st Floor, Restroom	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	
211061-A-247B	B-11, 1st Floor, Restroom	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 247A
211061-A-247C	B-11, 1st Floor, Restroom	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 247A
211061-A-248A	B-11, 1st Floor, Office 1	4" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	25 SF
211061-A-248B	B-11, 1st Floor, Office 1	4" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 248A
211061-A-248C	B-11, 1st Floor, Entry	4" Light Gray Cove Base/Cove Base Mastic	Non-Friable	Good	See 248A
211061-A-249A	B-11, 1st Floor, Kitchen 2	Unfinished Drywall	Non-Friable	Good	750 SF
211061-A-249B	B-11, 1st Floor, Work Area	Unfinished Drywall	Non-Friable	Good	See 249A
211061-A-249C	B-11, 1st Floor, Storage	Unfinished Drywall	Non-Friable	Good	See 249A
211061-A-250A	B-11, 1st Floor, Hallway	Drywall with Joint Compound	Non-Friable	Good	3,500 SF


Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:

PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-250B	B-11, 1st Floor, Weight Room	Drywall with Joint Compound	Non-Friable	Good	See 250A
211061-A-250C	B-11, 1st Floor, Entry	Drywall with Joint Compound	Non-Friable	Good	See 250A
211061-A-250D	B-11, 1st Floor, Office 1	Drywall with Joint Compound	Non-Friable	Good	See 250A
211061-A-250E	B-11, 1st Floor, Conference Room	Drywall with Joint Compound	Non-Friable	Good	See 250A
211061-A-251A	B-11, 1st Floor, Entry	2' x 4' White Fissured Ceiling Tile	Friable	Good	1,900 SF
211061-A-251B	B-11, 1st Floor, Conference Room	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 251A
211061-A-251C	B-11, 1st Floor, Administration	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 251A
211061-A-251D	B-11, 1st Floor, Hallway	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 251A
211061-A-251E	B-11, 1st Floor, Office 4	2' x 4' White Fissured Ceiling Tile	Friable	Good	See 251A
211061-A-252A	B-11, 1st Floor, Garage	Plaster with Skim Coat	Non-Friable	Fair	700 SF
211061-A-252B	B-11, 1st Floor, Garage	Plaster with Skim Coat	Non-Friable	Fair	See 252A
211061-A-252C	B-11, 1st Floor, Garage	Plaster with Skim Coat	Non-Friable	Fair	See 252A
211061-A-253A	B-11, Exterior, Exterior B	Concrete	Non-Friable	Good	400 SF
211061-A-253B	B-11, Exterior, Exterior A	Concrete	Non-Friable	Good	See 253A
211061-A-253C	B-11, Exterior, Exterior D	Concrete	Non-Friable	Good	See 253A
211061-A-254A	B-11, Exterior, Exterior B	Stucco with Vapor Barrier	Non-Friable	Good	2,000 SF
211061-A-254B	B-11, Exterior, Exterior A	Stucco with Vapor Barrier	Non-Friable	Good	See 254A
211061-A-254C	B-11, Exterior, Exterior B	Stucco with Vapor Barrier	Non-Friable	Good	See 254A
211061-A-254D	B-11, Exterior, Exterior D	Stucco with Vapor Barrier	Non-Friable	Good	See 254A
211061-A-254E	B-11, Exterior, Exterior D	Stucco with Vapor Barrier	Non-Friable	Good	See 254A
211061-A-255A	B-11, Exterior, Roof	Shingle Roof	Non-Friable	Good	950 SF
211061-A-255B	B-11, Exterior, Roof	Shingle Roof	Non-Friable	Good	See 255A
211061-A-255C	B-11, Exterior, Roof	Shingle Roof	Non-Friable	Good	See 255A
211061-A-256A	B-11, Exterior, Roof	Foam Roof over Rolled Roof Core	Non-Friable	Good	950 SF
211061-A-256B	B-11, Exterior, Roof	Foam Roof over Rolled Roof Core	Non-Friable	Good	See 256A
211061-A-256C	B-11, Exterior, Roof	Foam Roof over Rolled Roof Core	Non-Friable	Good	See 256A
211061-A-257A	B-11, Exterior, Roof	Penetration Putty	Non-Friable	Good	20 SF

Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:



PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-257B	B-11, Exterior, Roof	Penetration Putty	Non-Friable	Good	See 257A
211061-A-257C	B-11, Exterior, Roof	Penetration Putty	Non-Friable	Good	See 257A
211061-A-258A	B-11, Exterior, Roof	White Sealant Tape	Non-Friable	Good	5 SF
211061-A-258B	B-11, Exterior, Roof	White Sealant Tape	Non-Friable	Good	See 258A
211061-A-258C	B-11, Exterior, Roof	White Sealant Tape	Non-Friable	Good	See 258A
211061-A-259A	B-11, Exterior, Roof	HVAC Mastic	Non-Friable	Good	5 SF
211061-A-259B	B-11, Exterior, Roof	HVAC Mastic	Non-Friable	Good	See 259A
211061-A-259C	B-11, Exterior, Roof	HVAC Mastic	Non-Friable	Good	See 259A
211061-A-260A	B-04, Exterior, Exterior A	White Stucco	Non-Friable	Fair	500 SF
211061-A-260B	B-04, Exterior, Exterior A	White Stucco	Non-Friable	Fair	See 260A
211061-A-260C	B-04, Exterior, Exterior B	White Stucco	Non-Friable	Fair	See 260A
211061-A-261A	B-06, 1st Floor, Office 11	Carpet Glue	Non-Friable	Good	2,600 SF
211061-A-261B	B-06, 1st Floor, Office 8	Carpet Glue	Non-Friable	Good	See 261A
211061-A-261C	B-06, 1st Floor, Office 5	Carpet Glue	Non-Friable	Good	See 261A
211061-A-261D	B-06, 1st Floor, File Room	Carpet Glue	Non-Friable	Good	See 261A
211061-A-261E	B-06, 1st Floor, Conference Room	Carpet Glue	Non-Friable	Good	See 261A
211061-A-262A	B-06, 1st Floor, Restroom 1	Tan Vinyl Sheeting	Non-Friable	Good	150 SF
211061-A-262B	B-06, 1st Floor, Restroom 1	Tan Vinyl Sheeting	Non-Friable	Good	See 262A
211061-A-262C	B-06, 1st Floor, Restroom 2	Tan Vinyl Sheeting	Non-Friable	Good	See 262A
211061-A-263A	B-06, 1st Floor, Break Room	Speckled Vinyl Sheeting	Non-Friable	Good	150 SF
211061-A-263B	B-06, 1st Floor, Break Room	Speckled Vinyl Sheeting	Non-Friable	Good	See 263A
211061-A-263C	B-06, 1st Floor, Break Room	Speckled Vinyl Sheeting	Non-Friable	Good	See 263A
211061-A-264A	B-06, 1st Floor, Water Heater Closet	12" x 12" Brown with Dark Brown Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	50 SF
211061-A-264B	B-06, 1st Floor, Water Heater Closet	12" x 12" Brown with Dark Brown Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 264A
211061-A-264C	B-06, 1st Floor, Water Heater Closet	12" x 12" Brown with Dark Brown Resilient Floor Tile/Resilient Floor Mastic	Non-Friable	Good	See 264A

Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30a

Relinquished By:

Date:

Time:

Samples Received By:

Date:


Time:

**PLM BULK SAMPLE CHAIN OF CUSTODY**

211061-A-265A	B-06, 1st Floor, Conference Room	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	40 SF
211061-A-265B	B-06, 1st Floor, File Room	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 265A
211061-A-265C	B-06, 1st Floor, Storage	4" Black Cove Base/Cove Base Mastic	Non-Friable	Good	See 265A
211061-A-266A	B-06, 1st Floor, Hallway	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	100 SF
211061-A-266B	B-06, 1st Floor, Corridor	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 266A
211061-A-266C	B-06, 1st Floor, Hallway	4" Light Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 266A
211061-A-267A	B-06, 1st Floor, Restroom 1	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	20 SF
211061-A-267B	B-06, 1st Floor, Restroom 2	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 267A
211061-A-267C	B-06, 1st Floor, Water Heater Closet	4" Dark Brown Cove Base/Cove Base Mastic	Non-Friable	Good	See 267A
211061-A-268A	B-06, 1st Floor, Conference Room	Drywall with Wallpaper	Non-Friable	Good	4,500 SF
211061-A-268B	B-06, 1st Floor, Office 11	Drywall with Wallpaper	Non-Friable	Good	See 268A
211061-A-268C	B-06, 1st Floor, Security	Drywall with Wallpaper	Non-Friable	Good	See 268A
211061-A-268D	B-06, 1st Floor, Reception	Drywall with Wallpaper	Non-Friable	Good	See 268A
211061-A-268E	B-06, 1st Floor, Hallway	Drywall with Wallpaper	Non-Friable	Good	See 268A
211061-A-269A	B-06, 1st Floor, Conference Room	2' x 4' White Fissured/Pitted Ceiling Tile	Non-Friable	Good	3,000 SF
211061-A-269B	B-06, 1st Floor, Office 9	2' x 4' White Fissured/Pitted Ceiling Tile	Non-Friable	Good	See 269A
211061-A-269C	B-06, 1st Floor, Office 3	2' x 4' White Fissured/Pitted Ceiling Tile	Non-Friable	Good	See 269A
211061-A-269D	B-06, 1st Floor, Reception	2' x 4' White Fissured/Pitted Ceiling Tile	Non-Friable	Good	See 269A
211061-A-269E	B-06, 1st Floor, File Room	2' x 4' White Fissured/Pitted Ceiling Tile	Non-Friable	Good	See 269A
211061-A-270A	B-06, 1st Floor, Conference Room	Foil HVAC TSI	Non-Friable	Good	300 SF
211061-A-270B	B-06, 1st Floor, Storage	Foil HVAC TSI	Non-Friable	Good	See 270A
211061-A-270C	B-06, 1st Floor, Office 9	Foil HVAC TSI	Non-Friable	Good	See 270A
211061-A-271A	B-06, Exterior, Exterior B	Stucco	Non-Friable	Good	400 SF
211061-A-271B	B-06, Exterior, Exterior C	Stucco	Non-Friable	Good	See 271A

Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:




PLM BULK SAMPLE CHAIN OF CUSTODY

211061-A-271C	B-06, Exterior, Exterior D	Stucco	Non-Friable	Good	See 271A
211061-A-272A	B-06, Exterior, Roof	Rolled Roof	Non-Friable	Good	3,000 SF
211061-A-272B	B-06, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 272A
211061-A-272C	B-06, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 272A
211061-A-272D	B-06, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 272A
211061-A-272E	B-06, Exterior, Roof	Rolled Roof	Non-Friable	Good	See 272A
211061-A-273A	B-06, Exterior, Roof	Brown Penetration Putty	Non-Friable	Good	10 SF
211061-A-273B	B-06, Exterior, Roof	Brown Penetration Putty	Non-Friable	Good	See 273A
211061-A-273C	B-06, Exterior, Roof	Brown Penetration Putty	Non-Friable	Good	See 273A

Client Sample Number: 211061-A-094A to 211061-A-273C

Total: 654

Relinquished By: 

Date: 4/29/2021

Time: 11:21 PM

Samples Received By: 

Date: 4/30/21

Time: 8:30am

Relinquished By:

Date:

Time:

Samples Received By:

Date:

Time:

From: Reports <reports@atechinc.net>
Sent: Friday, June 18, 2021 12:15 PM
To: AIH Lab Customer Service; Labs
Subject: Re: 211061 | 44900 60th Street West, Lancaster, CA 93536 | Lab ID: 2106968
Attachments: 2106968 A-Tech Consulting Inc 131A-139A.pdf; 2107001 A-Tech Consulting Inc 237E-242E.pdf

Categories: Point Count

Good Afternoon AIH,

Can we please request a 1,000 point count on 24hr TAT for the four samples that came back <1%? They are samples 135A-135C and 239E. I've attached the lab results for reference. Please confirm upon receipt. Thank you!

Best regards,

Urisa Pamintuan
Data & Reports Department
A-Tech Consulting, Inc.
1640 N. Batavia St., Orange, CA 92867
Office: 714-434-6360
www.atechinc.net

Received by: Ryan Suenell 6/18/2021
12:15p
US

CONFIDENTIALITY NOTICE: This email message and any attachments are for the sole use of the intended recipient(s) and may contain proprietary, confidential, trade secret or privileged information. Any unauthorized review, use, disclosure or distribution is prohibited and may be a violation of law. If you are not the intended recipient or a person responsible for delivering this message to an intended recipient, please contact the sender by reply email and destroy all copies of the original message.

From: AIH Lab Customer Service <frontdesk@aihlab.com>
Sent: Thursday, May 6, 2021 5:11 PM
To: Casandra Williams <casandraw@atechinc.net>; Labs <labs@atechinc.net>
Subject: 211061 | 44900 60th Street West, Lancaster, CA 93536 | Lab ID: 2106968



AIH Laboratory
2556 W Woodland Dr Anaheim, CA 92801
Tel: (562) 860-2201
After Hour: (562) 450-0980
Fax: (562) 860-2202
Web: www.aihlab.com

State of California
Division of Occupational Safety and Health
Certified Site Surveillance Technician




Adrian E Urbina

Name

Certification No. **19-6634**

Expires on **12/18/21**

This certification was issued by the Division of Occupational Safety and Health as authorized by Sections 7180 et seq. of the Business and Professions Code.

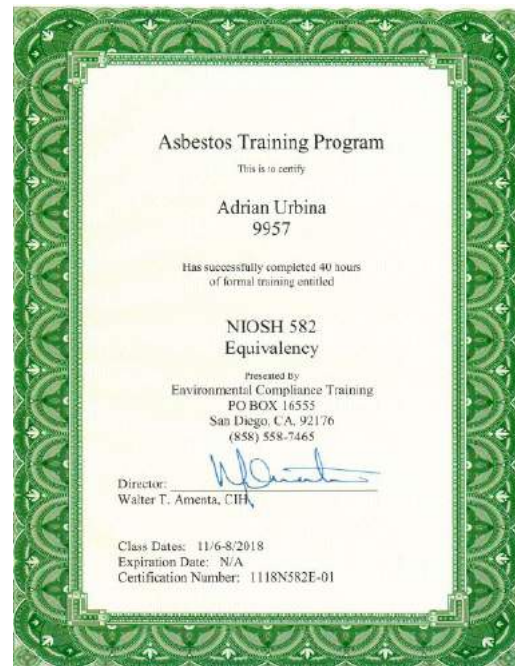

STATE OF CALIFORNIA
DEPARTMENT OF PUBLIC HEALTH

LEAD-RELATED CONSTRUCTION CERTIFICATE

INDIVIDUAL: **Adrian Urbina**

CERTIFICATE TYPE: Lead Sampling Technician

NUMBER: LRC-00006711

EXPIRATION DATE: 6/15/2022

Disclaimer: This document alone should not be relied upon to confirm certification status. Compare the individual's photo and name to another valid form of government issued photo identification. Verify the individual's certification status by searching for Lead-Related Construction Professionals at www.cdph.ca.gov/programs/clppb or calling (800) 597-LEAD.

Certificate Of Completion
Asbestos Building Inspector Refresher Course
DOSH #:CA-015-06
Adrian Urbina
ABIR2010153N26582

Online Training

Principal Instructor: Michael W. Horner
Training Director

10/12/2020 10/12/2020 10/12/2020 10/11/2021

This course satisfies the education requirements for Asbestos accreditation under the Toxic Substances Control Act, Title II. This course has been approved by the Department of Industrial Relations, Division of Occupational Safety and Health of the State of California

NATEC International, Inc.
National Association of Training and Environmental Consulting
1100 Technology Circle- Suite A, Anaheim, CA 92805 • www.natecintl.com • 800-969-3228

Certificate Of Completion
Asbestos Contractor/Supervisor Refresher Course
DOSH #:CA-015-04
Adrian Urbina
ASR20100153N26581

Online Training

Principal Instructor: Michael W. Horner
Training Director

10/11/2020 10/11/2020 10/11/2020 10/11/2021

This course satisfies the education requirements for Asbestos accreditation under the Toxic Substances Control Act, Title II. This course has been approved by the Department of Industrial Relations, Division of Occupational Safety and Health of the State of California

NATEC International, Inc.
National Association of Training and Environmental Consulting
1100 Technology Circle- Suite A, Anaheim, CA 92805 • www.natecintl.com • 800-969-3228

Important Industry Contacts

CAL-OSHA: PHF (916) 574-2993
(916) 483-0572 Fax notification
web: www.dtr.ca.gov or calosha.com

CDPH/CLPPB: PHF (510) 620-5600
web: www.cdph.ca.gov/programs/CLPPB

SCAQHD: PHF (909) 396-3739
FaxF (909) 396-3342

BAAQHD: PHF (415) 749-4762

NATEC International, Inc.
National Association of Training and Environmental Consulting
Anaheim, CA • Oakland, CA • Fresno, CA • Sacramento, CA

Asbestos - Lead - Mold - HAZWOPER

P.O. Box 25205 Anaheim, CA 92825-5205
(714) 678-2750, (800) 969-3228, Fax (714) 678-2757
www.natecintl.com

10/12/2020
Training Date: 10/12/2020
Certificate No: ABIR2010153N26582
Michael W. Horner
Training Director

Important Industry Contacts

CAL-OSHA: PHF (916) 574-2993
(916) 483-0572 Fax notification
web: www.dtr.ca.gov or calosha.com

CDPH/CLPPB: PHF (510) 620-5600
web: www.cdph.ca.gov/programs/CLPPB

SCAQHD: PHF (909) 396-3739
FaxF (909) 396-3342

BAAQHD: PHF (415) 749-4762

NATEC International, Inc.
National Association of Training and Environmental Consulting
Anaheim, CA • Oakland, CA • Fresno, CA • Sacramento, CA

Asbestos - Lead - Mold - HAZWOPER

P.O. Box 25205 Anaheim, CA 92825-5205
(714) 678-2750, (800) 969-3228, Fax (714) 678-2757
www.natecintl.com

10/11/2020
Training Date: 10/11/2020
Certificate No: ASR20100153N26581
Michael W. Horner
Training Director

State of California
Division of Occupational Safety and Health
Certified Asbestos Consultant

Robert L. Williams, Sr

Name
Certification No. **96-1980**
Expires on **07/15/21**

This certification was issued by the Division of Occupational Safety and Health as authorized by Sections 7180 et seq. of the Business and Professions Code.



STATE OF CALIFORNIA
DEPARTMENT OF PUBLIC HEALTH



LEAD-RELATED CONSTRUCTION CERTIFICATE

INDIVIDUAL:



Robert Williams

CERTIFICATE TYPE:

Lead Inspector/Assessor
Lead Project Monitor

NUMBER:

LRC-00004572
LRC-00004571

EXPIRATION DATE:

12/31/2021
12/31/2021

Disclaimer: This document alone should not be relied upon to confirm certification status. Compare the individual's photo and name to another valid form of government-issued photo identification. Verify the individual's certification status by searching for Lead-Related Construction Professionals at www.cdph.ca.gov/Programs/CID/DCDC/Pages/Lead-Related-Construction-Professionals.aspx or calling (800) 597-LET-AD.

Certificate Of Completion

Asbestos Contractor/Supervisor Refresher Course

DOSH #:CA-015-04

Robert Williams Sr.

ASR201001518N26581

Online Training

Principal Instructor

10/11/2020
Course Start Date

10/11/2020
Course End Date

Michael W. Horner
Training Director

10/11/2020
Exam Date

10/11/2021
Expiration Date

This course satisfies the education requirements for Asbestos accreditation under the Toxic Substances Control Act, Title II. This course has been approved by the Department of Industrial Relations, Division of Occupational Safety and Health of the State of California.

NATEC International, Inc.

National Association of Training and Environmental Consulting

1100 Technology Circle - Suite A, Anaheim, CA 92805 • www.natecintl.com • 800-969-3228

Important Industry Contacts

NATEC International, Inc.
National Association of Training and Environmental Consulting
Anaheim, CA • Oakland, CA • Fresno, CA • Sacramento, CA

Asbestos - Lead - Mold - HAZWOPER
P.O. Box 25205 Anaheim, CA 92825-5205
(714) 678-2750, (800) 969-3228, Fax (714) 678-2757
www.natecintl.com

NATEC International, Inc.
National Association of Training and Environmental Consulting
Anaheim, CA • Oakland, CA • Fresno, CA • Sacramento, CA

Asbestos - Lead - Mold - HAZWOPER
P.O. Box 25205 Anaheim, CA 92825-5205
(714) 678-2750, (800) 969-3228, Fax (714) 678-2757
www.natecintl.com

Training Date: _____
Certificate No. _____
Training Director: _____

Certificate Of Completion

Asbestos Project Designer Refresher Course

DOSH #:CA-015-10

Robert Williams Sr.

APDR2010158N26584

Online Training

Principal Instructor

10/12/2020
Course Start Date

10/12/2020
Course End Date

Michael W. Horner
Training Director

10/12/2020
Exam Date

10/12/2021
Expiration Date

This course satisfies the education requirements for Asbestos accreditation under the Toxic Substances Control Act, Title II. This course has been approved by the Department of Industrial Relations, Division of Occupational Safety and Health of the State of California.

NATEC International, Inc.

National Association of Training and Environmental Consulting

1100 Technology Circle - Suite A, Anaheim, CA 92805 • www.natecintl.com • 800-969-3228

Important Industry Contacts

NATEC International, Inc.
National Association of Training and Environmental Consulting
Anaheim, CA • Oakland, CA • Fresno, CA • Sacramento, CA

Asbestos - Lead - Mold - HAZWOPER
P.O. Box 25205 Anaheim, CA 92825-5205
(714) 678-2750, (800) 969-3228, Fax (714) 678-2757
www.natecintl.com

NATEC International, Inc.
National Association of Training and Environmental Consulting
Anaheim, CA • Oakland, CA • Fresno, CA • Sacramento, CA

Asbestos - Lead - Mold - HAZWOPER
P.O. Box 25205 Anaheim, CA 92825-5205
(714) 678-2750, (800) 969-3228, Fax (714) 678-2757
www.natecintl.com

Training Date: _____
Certificate No. _____
Training Director: _____

Certificate Of Completion

Asbestos Building Inspector Refresher Course

DOSH #:CA-015-06

Robert Williams Sr.

ABIR20101518N26582

Online Training

Principal Instructor

10/13/2020
Course Start Date

10/13/2020
Course End Date

Michael W. Horner
Training Director

10/13/2020
Exam Date

10/13/2021
Expiration Date

This course satisfies the education requirements for Asbestos accreditation under the Toxic Substances Control Act, Title II. This course has been approved by the Department of Industrial Relations, Division of Occupational Safety and Health of the State of California.

NATEC International, Inc.

National Association of Training and Environmental Consulting

1100 Technology Circle - Suite A, Anaheim, CA 92805 • www.natecintl.com • 800-969-3228

Important Industry Contacts

NATEC International, Inc.
National Association of Training and Environmental Consulting
Anaheim, CA • Oakland, CA • Fresno, CA • Sacramento, CA

Asbestos - Lead - Mold - HAZWOPER
P.O. Box 25205 Anaheim, CA 92825-5205
(714) 678-2750, (800) 969-3228, Fax (714) 678-2757
www.natecintl.com

NATEC International, Inc.
National Association of Training and Environmental Consulting
Anaheim, CA • Oakland, CA • Fresno, CA • Sacramento, CA

Asbestos - Lead - Mold - HAZWOPER
P.O. Box 25205 Anaheim, CA 92825-5205
(714) 678-2750, (800) 969-3228, Fax (714) 678-2757
www.natecintl.com

Training Date: _____
Certificate No. _____
Training Director: _____

Certificate Of Completion

Asbestos Management Planner Refresher Course

DOSH #:CA-015-08

Robert Williams Sr.

AMPR2010158N26583

Online Training

Principal Instructor

10/19/2020
Course Start Date

10/19/2020
Course End Date

Michael W. Horner
Training Director

10/19/2020
Exam Date

10/19/2021
Expiration Date

This course satisfies the education requirements for Asbestos accreditation under the Toxic Substances Control Act, Title II. This course has been approved by the Department of Industrial Relations, Division of Occupational Safety and Health of the State of California.

NATEC International, Inc.

National Association of Training and Environmental Consulting

1100 Technology Circle - Suite A, Anaheim, CA 92805 • www.natecintl.com • 800-969-3228

Important Industry Contacts

NATEC International, Inc.
National Association of Training and Environmental Consulting
Anaheim, CA • Oakland, CA • Fresno, CA • Sacramento, CA

Asbestos - Lead - Mold - HAZWOPER
P.O. Box 25205 Anaheim, CA 92825-5205
(714) 678-2750, (800) 969-3228, Fax (714) 678-2757
www.natecintl.com

NATEC International, Inc.
National Association of Training and Environmental Consulting
Anaheim, CA • Oakland, CA • Fresno, CA • Sacramento, CA

Asbestos - Lead - Mold - HAZWOPER
P.O. Box 25205 Anaheim, CA 92825-5205
(714) 678-2750, (800) 969-3228, Fax (714) 678-2757
www.natecintl.com

Training Date: _____
Certificate No. _____
Training Director: _____



American Council for
Accredited Certification

hereby certifies that

Robert L. Williams, Sr.

has met all the specific standards and qualifications of the re-certification process, including continued professional development, and is hereby re-certified as a



Council-certified
Indoor Environmental Consultant

This certificate expires on June 30, 2021.

Charles F. Wiles

Charles F. Wiles, Executive Director

1506014

Certificate Number

This certificate remains the property of the American Council for Accredited Certification.



Cover

LEAD

I. Executive Summary

- 1.0 Introduction
- 2.0 Scope of Assessment
- 3.0 Property Description/Historical Description
- 4.0 Inspector's Qualifications
- 5.0 Testing Methodology
- 6.0 Testing Protocol
- 7.0 Summary of Results
- 8.0 Conclusions and Recommendations
- 9.0 Limitations

II. Appendices

A. Tables: Lead XRF Table

B. Diagrams: Site Diagram

C. Digital Photographs

D. DPH 8552 Form

Atch-211061
Comprehensive XRF-Lead Assessment
44900 60th Street West
Lancaster, California 93536

June 23, 2021

County of Los Angeles, Department of Public Works
900 South Fremont Avenue
Alhambra, California 91803

Attn: Mr. Gus Bitar

Re: High Desert Hospital
44900 60th Street West, Various Buildings, Interior and Exterior
Lancaster, California 93536

Pursuant to your request, A-Tech Consulting, Inc. performed a Comprehensive XRF-Lead Assessment at High Desert Hospital, 44900 60th Street West, in Lancaster, California. The following report summarizes all findings and results of this inspection.

1.0 INTRODUCTION

A-Tech was contacted by Mr. Gus Bitar with the County of Los Angeles, Department of Public Works to confirm the presence or absence of lead. This report presents the results for the Comprehensive XRF-Lead Assessment in various buildings at High Desert Hospital located at 44900 60th Street West, (subject property/site), in Lancaster, California. The inspection was performed in accordance with Environmental Protection Agency (EPA) and California Occupational Safety and Health (CAL-OSHA) requirements, utilizing United States Housing and Urban Development (HUD) protocols. This report does not represent a HUD level inspection. The scope of services, inspection methodology and results are presented herein. The sampling was conducted by Adrian Urbina - CDPH Sampling Technician #LRC-00006711 intermittently from April 05, 2021 to April 29, 2021.

2.0 SCOPE OF ASSESSMENT

The purpose of this Comprehensive XRF-Lead Assessment is to identify and assess lead containing material (LCM) present at the subject property with the potential for impact during upcoming renovation and/or demolition activities. The intent of the assessment is to ascertain the presence of lead-based paint at or above 1.0 mg/cm². All inspections conducted in Los Angeles County will adhere to the more stringent level of 0.7 mg/cm² as required per the Los Angeles County Department of Public Health (DPH) regulatory action levels.

3.0 PROPERTY DESCRIPTION/HISTORICAL DATA

The subject property inspected consists of a three-story hospital building and various single-story buildings with various interior and exterior compositions consisting of drywall, plaster, wood, stucco, brick and/or metal, all built on concrete foundations. At the time of the inspection, it was observed that the surfaces tested in the inspected areas are in intact condition. The build date is unknown.

4.0 INSPECTOR'S QUALIFICATIONS

The inspector who conducted the site sampling/assessment is a state certified California Department of Public Health (CA-DPH) Sampling Technician, has completed an EPA sponsored curriculum in the Lead Sampling Technician Training, and has attended the manufacturer's radiation safety course for operation and handling of the XRF instrument.

At the time of this report, the California Department of Public Health, Childhood Lead Poisoning Branch, has implemented a State Certification and Model Accreditation Plan adopted from the Environmental Protection Agency (EPA).

5.0 TESTING METHODOLOGY

The method employed for testing painted surfaces was with an X-ray fluorescence (XRF) analyzer. A-Tech Consulting, Inc. utilized a Viken Pb200i X-Ray fluorescence (XRF) lead paint analyzer to sample paint for lead content. XRF Instrument serial #00640 was used for this project. The instrument was calibrated to the manufacturer's specifications and was also periodically verified against the National Institute of Standards and Testing (NIST) Standard Reference Material (SRM) 2579 lead film (1.0 mg/cm²). The instrument was in-control at all times for the wood zero standard and NIST SRM lead standard.

A visual inspection consisting of a walkthrough of the subject site was conducted to determine the presence of suspect LCM components that were readily accessible and/or exposed. This included the identification of suspect lead-based painted components, ceramic tile, glazed components, etc. and the determination of the condition of those components. All coated surfaces, including but not limited to painted, varnished, and glazed surfaces, were tested for lead content.

6.0 TESTING PROTOCOL

Testing was conducted in accordance with Chapter 7 of the Guidelines for the Evaluation and Control of Lead-Based Paint Hazards in Housing as published by HUD in 2012. XRF readings were obtained on representative painted surfaces on each building component in each room equivalent. The HUD definition of lead-based paint is equal to or greater than 1.0 mg/cm² (or the more stringent regulatory requirement in Los Angeles County of 0.7 mg/cm²). All XRF readings below the regulatory definition are considered negative and all readings at and above this level are considered positive.

7.0 SUMMARY OF RESULTS

According to the XRF findings, the following components tested positive for the presence of lead at or above 0.7 mg/cm².

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Reading mg/cm2</u>	<u>Est. Qty.</u>
211061-XRF-0006	Main Hospital, 1st Floor, Area A, A10	6" x 6"	White	Ceramic	Floor Tile	1.1	1,400 SF
211061-XRF-0007	Main Hospital, 1st Floor, Area A, A-S Corridor	6" x 6"	White	Ceramic	Floor Tile	1.0	See 0006
211061-XRF-0008	Main Hospital, 1st Floor, Area A, A-N Corridor	6" x 6"	White	Ceramic	Floor Tile	0.9	See 0006
211061-XRF-0013	Main Hospital, 1st Floor, Area A, A2	4" x 6"	Gray/Blue	Ceramic	Wall Tile	10.2	10,000 SF
211061-XRF-0018	Main Hospital, 1st Floor, Area A, A4	4" x 6"	Beige	Ceramic	Wall Tile	19.4	15,000 SF
211061-XRF-0025	Main Hospital, 1st Floor, Area A, A27	-	White	Plaster	Wall	2.7	900 SF
211061-XRF-0026	Main Hospital, 1st Floor, Area A, A27	-	White	Plaster	Wall	2.3	See 0025
211061-XRF-0028	Main Hospital, 1st Floor, Area A, A27	-	White	Plaster	Wall	2.9	See 0025
211061-XRF-0029	Main Hospital, 1st Floor, Area 1/2, 106	4" x 6"	Beige	Ceramic	Wall Tile	17.4	See 0018
211061-XRF-0030	Main Hospital, 1st Floor, Area 1/2, 106	6" x 6"	Beige	Ceramic	Cove Base Tile	16.8	See 0018
211061-XRF-0038	Main Hospital, 1st Floor, Area 1/2, 108	4" x 6"	Gray/Blue	Ceramic	Wall Tile	9.8	See 0013
211061-XRF-0039	Main Hospital, 1st Floor, Area 1/2, 208	4" x 6"	Light Green	Ceramic	Wall Tile	13.7	10 SF
211061-XRF-0040	Main Hospital, 1st Floor, Area 1/2, 208	6" x 6"	Light Green	Ceramic	Cove Base Tile	14.0	2 SF

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Reading mg/cm2</u>	<u>Est. Qty.</u>
211061-XRF-0041	Main Hospital, 1st Floor, Area 1/2, 208	-	White	Porcelain	Toilet	4.0	1 EA
211061-XRF-0046	Main Hospital, 1st Floor, Area 1/2, 208	6" x 6"	Gray/Blue	Ceramic	Cove Base Tile	10.1	1,000 SF
211061-XRF-0054	Main Hospital, 1st Floor, Area 3/4, 301	4" x 6"	Gray/Blue	Ceramic	Wall	10.1	See 0013
211061-XRF-0055	Main Hospital, 1st Floor, Area 3/4, 301	6" x 6"	Gray/Blue	Ceramic	Cove Base Tile	10.2	See 0047
211061-XRF-0061	Main Hospital, 1st Floor, Area 3/4, 301	-	White	Porcelain	Urinal	2.5	1 EA
211061-XRF-0064	Main Hospital, 1st Floor, Area 3/4, 404	4" x 6"	Beige	Ceramic	Wall Tile	17.9	See 0018
211061-XRF-0065	Main Hospital, 1st Floor, Area 3/4, 404	6" x 6"	Beige	Ceramic	Cove Base Tile	17.8	See 0030
211061-XRF-0071	Main Hospital, 1st Floor, Area 3/4, 418	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	17.2	1,000 SF
211061-XRF-0080	Main Hospital, 1st Floor, Area B-E, B20	4" x 6"	Beige	Ceramic	Wall Tile	19.3	See 0018
211061-XRF-0081	Main Hospital, 1st Floor, Area B-E, B20	6" x 6"	Beige	Ceramic	Cove Base Tile	18.2	See 0030
211061-XRF-0082	Main Hospital, 1st Floor, Area B-E, E8	4" x 6"	Gray/Blue	Ceramic	Wall Tile	9.5	See 0013
211061-XRF-0087	Main Hospital, 1st Floor, Area B-E, E8	-	White	Porcelain	Sink	33.0	1 EA
211061-XRF-0088	Main Hospital, 1st Floor, Area B-E, E8	-	White	Porcelain	Floor Sink	42.0	1 EA
211061-XRF-0089	Main Hospital, 1st Floor, Area B-E, B1	-	White	Plaster	Wall	1.7	See 0025
211061-XRF-0091	Main Hospital, 1st Floor, Area B-E, B1	-	White	Plaster	Wall	2.8	See 0025
211061-XRF-0092	Main Hospital, 1st Floor, Area B-E, B1	-	White	Plaster	Wall	1.6	See 0025
211061-XRF-0101	Main Hospital, 1st Floor, Area B-E, D13	4" x 6"	Beige	Ceramic	Wall Tile	18.2	See 0030
211061-XRF-0102	Main Hospital, 1st Floor, Area B-E, D13	6" x 6"	Beige	Ceramic	Cove Base Tile	18.2	See 0030
211061-XRF-0116	Main Hospital, 1st Floor, Area B-E, C24	4" x 6"	Gray/Blue	Ceramic	Wall Tile	10.0	See 0013
211061-XRF-0117	Main Hospital, 1st Floor, Area B-E, C24	6" x 6"	Gray/Blue	Ceramic	Cove Base Tile	10.1	See 0047
211061-XRF-0121	Main Hospital, 1st Floor, Area B-E, C24	-	White	Porcelain	Sink	4.6	1 EA
211061-XRF-0123	Main Hospital, 1st Floor, Area 5/6, 604	-	White	Porcelain	Bathtub	1.0	1 EA
211061-XRF-0124	Main Hospital, 1st Floor, Area 5/6, 604	4" x 6"	Beige	Ceramic	Wall Tile	19.0	See 0018
211061-XRF-0130	Main Hospital, 1st Floor, Area 5/6, 611	4" x 6"	Gray/Blue	Ceramic	Wall Tile	10.1	See 0013
211061-XRF-0131	Main Hospital, 1st Floor, Area 5/6, 611	6" x 6"	Gray/Blue	Ceramic	Cove Base Tile	10.4	See 0047
211061-XRF-0139	Main Hospital, 1st Floor, Area 5/6, 510	-	White	Porcelain	Toilet	3.6	1 EA
211061-XRF-0140	Main Hospital, 1st Floor, Area 7/8, 706	4" x 6"	Beige	Ceramic	Wall Tile	17.6	See 0018
211061-XRF-0141	Main Hospital, 1st Floor, Area 7/8, 706	6" x 6"	Beige	Ceramic	Cove Base Tile	17.9	See 0030

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Reading mg/cm2</u>	<u>Est. Qty.</u>
211061-XRF-0149	Main Hospital, 1st Floor, Area 7/8, 711	4" x 6"	Gray/Blue	Ceramic	Wall Tile	10.1	See 0013
211061-XRF-0150	Main Hospital, 1st Floor, Area 7/8, 711	6" x 6"	Gray/Blue	Ceramic	Wall Tile	10.0	See 0047
211061-XRF-0151	Main Hospital, 1st Floor, Area 7/8, 711	-	White	Porcelain	Toilet	4.4	1 EA
211061-XRF-0152	Main Hospital, 1st Floor, Area 7/8, 805	4" x 6"	Beige	Ceramic	Wall Tile	19.1	See 0018
211061-XRF-0153	Main Hospital, 1st Floor, Area 7/8, 805	6" x 6"	Beige	Ceramic	Wall Tile	17.2	See 0030
211061-XRF-0161	Main Hospital, 1st Floor, Area B-E, Stair	-	Yellow	Metal	Hand Rail	1.9	1 EA
211061-XRF-0162	Main Hospital, 1st Floor, Area B-E, Stair	-	Yellow	Metal	Hand Rail	2.1	1 EA
211061-XRF-0181	Main Hospital, 1st Floor, Area 1/2, 215	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	20.7	See 0073
211061-XRF-0182	Main Hospital, 1st Floor, Area 1/2, 216	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	19.9	See 0073
211061-XRF-0184	Main Hospital, 1st Floor, Area 3/4, 316	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	17.4	See 0073
211061-XRF-0185	Main Hospital, 1st Floor, Area 3/4, 418	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	19.9	See 0073
211061-XRF-0188	Main Hospital, 1st Floor, Area 5/6, 513	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	20.1	See 0073
211061-XRF-0207	Main Hospital, 1st Floor, Area 7/8, 816	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	20.4	See 0073
211061-XRF-0208	Main Hospital, 1st Floor, Area 7/8, 817	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	20.3	See 0073
211061-XRF-0209	Main Hospital, 1st Floor, Area 7/8, 819	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	9.1	See 0073
211061-XRF-0214	Main Hospital, 1st Floor, Area 5/6, 612	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	23.3	See 0073
211061-XRF-0216	Main Hospital, 1st Floor, Area 3/4, 319	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	19.3	See 0073
211061-XRF-0217	Main Hospital, 1st Floor, Area 3/4, 317	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	19.1	See 0073
211061-XRF-0218	Main Hospital, Exterior C	-	Yellow	Concrete	Stair	1.1	2 SF
211061-XRF-0220	Main Hospital, Exterior C	-	Red	Metal	Hydraulic Lift	3.3	10 SF
211061-XRF-0224	Main Hospital, Exterior C	-	White	Concrete	Column	0.8	100 SF
211061-XRF-0238	Main Hospital, Exterior C	-	Black	Metal	Plaque	6.5	2 SF
211061-XRF-0243	Main Hospital, Exterior D	-	Light Gray	Metal	Overhang	0.7	1,000 SF
211061-XRF-0254	Main Hospital, Exterior, Awning	-	Light Blue	Metal	Post	12.1	8 EA
211061-XRF-0255	Main Hospital, Exterior, Awning	-	Light Blue	Metal	Overhang	7.8	150 SF

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Reading mg/cm2</u>	<u>Est. Qty.</u>
211061-XRF-0256	Main Hospital, Exterior A	-	Light Blue	Metal	Partition	2.8	100 SF
211061-XRF-0260	Main Hospital, Exterior A	-	Light Blue	Stucco	Wall	1.1	200 SF
211061-XRF-0263	Main Hospital, Exterior B	-	Light Blue	Metal	Overhang	0.9	1 EA
211061-XRF-0265	Main Hospital, Exterior B	-	Light Blue	Metal	Hand Rail	1.1	2 EA
211061-XRF-0601	B-07, 1st Floor, Janitor	-	White	Porcelain	Floor Sink	12.1	1 EA
211061-XRF-0723	B-12, 1st Floor, Open Area	-	White	Porcelain	Sink	48.0	1 EA
211061-XRF-0744	B-13, 1st Floor, Bathroom	4" x 4"	Brown	Ceramic	Wall Tile	30.0	100 SF
211061-XRF-0745	B-13, 1st Floor, Bathroom	4" x 4"	Brown	Ceramic	Wall Tile	8.2	See 0744
211061-XRF-0746	B-13, 1st Floor, Bathroom	4" x 4"	Brown	Ceramic	Wall Tile	23.4	See 0744
211061-XRF-0747	B-13, 1st Floor, Bathroom	4" x 4"	Brown	Ceramic	Wall Tile	23.6	See 0744

Please refer to Attachment A Lead XRF Table for detailed sample information.

Samples represent all materials that are similar (homogenous). If a testing combination is found positive in one location, it is presumed to be positive in all other locations. Therefore, you cannot continue sampling to rebut an original positive finding, unless there is plausible evidence that the suspected material was constructed and/or replaced at a later time.

8.0 CONCLUSIONS AND RECOMMENDATIONS

Cal-OSHA considers levels at 1.0 mg/cm² (5,000 ppm HUD) and greater to be an exposure risk to lead containing material and can result in a substantial worker exposure during construction, demolition, etc. Cal-OSHA's current level for objective data/negative determination is 600 ppm. However, anyone performing trigger tasks, regardless of the level of lead, as outlined in 29 CFR 1926.62 and Title 8 CCR 1532.1 can reasonably assume risk of lead exposure. Work activities which may lead to any amount of lead exposure must be conducted in accordance with safe lead work practices, current regulatory guidelines, and current proper protective equipment protocols.

Lead is a hazardous substance and poses a health risk when impacted, damaged or sufficiently deteriorated to produce respirable/digestible dust. If lead based/containing components are to be impacted during work activities including but not limited to, sanding, chipping, demolition, renovation and/or construction, specifications should incorporate detailed methodology for proper stabilization and/or removal of the lead surfaces. Anyone performing trigger tasks, regardless of the level of lead, as outlined in 29 CFR 1926.62 and Title 8 CCR 1532.1 can reasonably assume risk of lead exposure. Work activities which may lead to any amount of lead exposure must be conducted in accordance with safe lead work practices, current regulatory guidelines, and current proper protective equipment protocols.

For any materials that will remain in place a Lead Management Program should be prepared and implemented to avoid incidental, and/or accidental disturbance of LCM, present at the subject site. The program should set forth operational and maintenance guidelines to minimize lead consumption or exposures that may be caused by age, normal wear and tear, delamination, building maintenance, repairs, renovation and other activities that may impact LCM. Further assessments should be scheduled with a licensed Risk Assessor/Inspector on an annual basis, to ensure LCM conditions remain stable. Any signs of paint deterioration should be immediately stabilized. Note that under Section 302 of the Lead-Based Paint Poisoning Prevention Act (LBPPPA), LCM hazards equal to or greater than 0.5% by weight (5,000 ppm) or 1.0 mg/cm² must be abated.

Any work activities that may exceed the CAL-OSHA action level of lead particles of 30 micrograms per cubic meter (ug/m³) or air for an 8 hour time weighted average must comply with CAL-OSHA requirements. Any work activities meeting or exceeding the CAL-OSHA Permissible Exposure Limit of exposure to lead particles of ug/m³ of air shall comply with Title 8 CCR 1532.1-Lead Construction Standard. All workers and supervisors shall be trained by a state-accredited training provider and certified by the CA-DPH (worker or supervisor certified). All employee exposure monitoring must be adhered to in accordance with CAL-OSHA requirements.

LCM that is intact and is not damaged or delaminating can be disposed of as construction debris as long as it is attached to its original substrate subsequent to proper waste characterization/stream analysis (TTLC, STLC and TCLP). However, appropriate work practices and worker protection must be utilized.

9.0 LIMITATIONS

The conclusions presented in this report are professional opinions based solely upon visual observations at the site and laboratory analysis of the tested samples. They are intended exclusively for the purpose outlined herein, and for the site location and project indicated.

This comprehensive inspection was planned, developed, and implemented based on A-Tech's scope of services approved by the client. This inspection was conducted in compliance with current regulatory protocols. A-Tech utilized state-of-the-art-practices and techniques in accordance with regulatory standards, while performing this inspection. A-Tech's evaluation of the relative risk of exposure to lead, identified during this limited inspection, is based on conditions observed at the time of the limited inspection.

A-Tech cannot be responsible for changing conditions that may alter the relative exposure risk or for future changes in accepted methodology. The floor plans and actual test results for each of the tested areas are contained within this report. **Lead quantities are estimates only (see Lead Tables-Est. Qty.) Exact quantities should be verified by the abatement contractor prior to stabilization/removal.**

This assessment report is not specifications for lead abatement and it should not be used as a stand-alone lead abatement bid document. Recognizing that even the most comprehensive assessment may fail to detect lead at a particular site, this study was not intended to identify all potential LCM's present in the building or at the site for such reasons as the possible existence of buried, covered and inaccessible areas and features. A-Tech does not warrant that all sub-surface, wall cavity or other inaccessible materials were tested. A-Tech did not test any live electrical components or disassemble operational building equipment such as fans or HVAC components. These components may contain untested suspect LCM's. If any suspect LCM's not tested herein are discovered, they must be tested prior to impact.

A-Tech assumes no responsibility for the identification of suspect LCM's, which were not included in the client's scope of work or were concealed and/or inaccessible (i.e. locked rooms, under carpet, etc.) However, A-Tech makes every attempt possible to test all designated areas for lead (i.e. check under carpeting, inspect attic, crawl space, etc.). A-Tech assumes no responsibility for the identification of "atypical" LCM, used in the construction trade.

There are potential liabilities associated with the presence, and removal, of LCM. Precautionary measures, as outlined herein, should be taken in accordance with the guidelines set forth by the EPA, CAL-OSHA and other regulatory agencies.

Services performed by A-Tech were conducted in a manner above the care and skill ordinarily and currently exercised by members of the same profession that even the most comprehensive scope of services might fail to detect environmental liabilities on a particular site. Therefore, A-Tech cannot act as insurers and cannot "certify" that a site is free of environmental contamination.

No expressed or implied representation or warranty is included or intended in our reports, except that our services were performed, within the limits prescribed by the Scope of Services, with the customary thoroughness and competence of our profession.

This report is intended for the sole use of the contracted Client and its authorized representatives. The exchange of information was unique between A-Tech and the client regarding the mutually agreed upon scope of service. Unless explicitly authorized in this report, no third party is beneficiary to the contract or findings of this report. The unauthorized use or reliance of this document or the findings, conclusion or recommendations presented herein, by any other party or parties is at the sole risk of any such third party. For the same reasons, no warranties or representations, expressed or implied in this report, are provided to any such third party.

Information and opinions presented herein apply to the existing and reasonable foreseeable site conditions at the time of our investigation. They cannot necessarily apply to site changes of which this office is unaware and have not had the opportunity to review. Changes in the conditions of this property may occur with time due to natural processes or works of man on the subject property or on adjacent properties. Changes in applicable standards may also occur as a result of legislation or the broadening of knowledge. Accordingly, the findings of this report may be invalidated, wholly or in part by changes beyond our control.

A-Tech representatives are prepared to meet with your staff, to further discuss this project, upon your request. A-Tech trusts that the information presented herein provides the data you require. Should you have any questions or comments please contact A-Tech Consulting, Inc. at (800) 434-1025.

Respectfully submitted,
A-Tech Consulting, Inc.



Robert L. Williams, DPH, CAC, CIEC
Certified Lead Inspector/Assessor #LRC-00004572

XRF-Lead Sample Summary

Location: High Desert Hospital, 44900 60th Street West

Client Name: County of Los Angeles, Department of Public Works

Area: Various Buildings, Interior and Exterior

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0001	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0002	Calibration	-	-	-	NIST	-	-	0.9	-	-	-
211061-XRF-0003	Calibration	-	-	-	NIST	-	-	0.9	-	-	-
211061-XRF-0004	Main Hospital, 1st Floor, Area A, A20	4" x 4"	Cream	Ceramic	Wall Tile	A	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0005	Main Hospital, 1st Floor, Area A, A20	6" x 6"	Light Gray	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0006	Main Hospital, 1st Floor, Area A, A10	6" x 6"	White	Ceramic	Floor Tile	-	Positive	1.1	Intact	High	1,400 SF
211061-XRF-0007	Main Hospital, 1st Floor, Area A, A-S Corridor	6" x 6"	White	Ceramic	Floor Tile	-	Positive	1.0	Intact	High	See 0006
211061-XRF-0008	Main Hospital, 1st Floor, Area A, A-N Corridor	6" x 6"	White	Ceramic	Floor Tile	-	Positive	0.9	Intact	High	See 0006
211061-XRF-0009	Main Hospital, 1st Floor, Area A, A22	4" x 4"	Cream	Ceramic	Wall Tile	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0010	Main Hospital, 1st Floor, Area A, A22	6" x 6"	Light Gray	Ceramic	Floor Tile	-	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0011	Main Hospital, 1st Floor, Area A, A22	-	White	Porcelain	Sink	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0012	Main Hospital, 1st Floor, Area A, A22	-	White	Porcelain	Toilet	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0013	Main Hospital, 1st Floor, Area A, A2	4" x 6"	Gray/Blue	Ceramic	Wall Tile	D	Positive	10.2	Intact	High	10,000 SF

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0014	Main Hospital, 1st Floor, Area A, A2	2" x 2"	Light Gray with Black Spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0015	Main Hospital, 1st Floor, Area A, A2	2" x 1"	Light Gray	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0016	Main Hospital, 1st Floor, Area A, A2	2" x 1"	Light Gray	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0017	Main Hospital, 1st Floor, Area A, A2	1" x 1"	Gray	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0018	Main Hospital, 1st Floor, Area A, A4	4" x 6"	Beige	Ceramic	Wall Tile	A	Positive	19.4	Intact	High	15,000 SF
211061-XRF-0019	Main Hospital, 1st Floor, Area A, A4	2" x 2"	Brown	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0020	Main Hospital, 1st Floor, Area A, A4	2" x 1"	Light Brown	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0021	Main Hospital, 1st Floor, Area A, A4	1" x 1"	Bronze	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0022	Main Hospital, 1st Floor, Area A, A10	-	Gray	Concrete	Wall	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0023	Main Hospital, 1st Floor, Area A, Electrical Room	-	Gray	Metal	Door Frame	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0024	Main Hospital, 1st Floor, Area A, Electrical Room	-	Tan	Metal	Door Frame	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0025	Main Hospital, 1st Floor, Area A, A27	-	White	Plaster	Wall	A	Positive	2.7	Intact	High	900 SF
211061-XRF-0026	Main Hospital, 1st Floor, Area A, A27	-	White	Plaster	Wall	C	Positive	2.3	Intact	High	See 0025
211061-XRF-0027	Main Hospital, 1st Floor, Area A, A27	-	White	Plaster	Wall	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0028	Main Hospital, 1st Floor, Area A, A27	-	White	Plaster	Wall	B	Positive	2.9	Intact	High	See 0025

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0029	Main Hospital, 1st Floor, Area 1/2, 106	4" x 6"	Beige	Ceramic	Wall Tile	B	Positive	17.4	Intact	High	See 0018
211061-XRF-0030	Main Hospital, 1st Floor, Area 1/2, 106	6" x 6"	Beige	Ceramic	Cove Base Tile	B	Positive	16.8	Intact	High	See 0018
211061-XRF-0031	Main Hospital, 1st Floor, Area 1/2, 106	2" x 2"	Light Brown	Ceramic	Floor Tile	-	Negative	0.2	Intact	N/A	N/A
211061-XRF-0032	Main Hospital, 1st Floor, Area 1/2, 106	2" x 1"	Beige	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0033	Main Hospital, 1st Floor, Area 1/2, 106	1" x 1"	Bronze	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0034	Main Hospital, 1st Floor, Area 1/2, Corridor 1	-	Light Pink	Plaster	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0035	Main Hospital, 1st Floor, Area 1/2, Corridor 1	-	Light Pink	Plaster	Wall	C	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0036	Main Hospital, 1st Floor, Area 1/2, 105	-	Light Pink	Metal	Door	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0037	Main Hospital, 1st Floor, Area 1/2, 105	-	Light Pink	Metal	Door Frame	A	Negative	0.2	Intact	N/A	N/A
211061-XRF-0038	Main Hospital, 1st Floor, Area 1/2, 108	4" x 6"	Gray/Blue	Ceramic	Wall Tile	A	Positive	9.8	Intact	High	See 0013
211061-XRF-0039	Main Hospital, 1st Floor, Area 1/2, 208	4" x 6"	Light Green	Ceramic	Wall Tile	A	Positive	13.7	Intact	High	10 SF
211061-XRF-0040	Main Hospital, 1st Floor, Area 1/2, 208	6" x 6"	Light Green	Ceramic	Cove Base Tile	A	Positive	14.0	Intact	High	2 SF
211061-XRF-0041	Main Hospital, 1st Floor, Area 1/2, 208	-	White	Porcelain	Toilet	A	Positive	4.0	Intact	High	1 EA
211061-XRF-0042	Main Hospital, 1st Floor, Area 1/2, 208	2" x 2"	Light Gray with Black Spots	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0043	Main Hospital, 1st Floor, Area 1/2, 208	2" x 1"	Light Gray	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0044	Main Hospital, 1st Floor, Area 1/2, 208	1" x 1"	Light Gray	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0045	Main Hospital, 1st Floor, Area 1/2, 208	1" x 1"	Gray	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0046	Main Hospital, 1st Floor, Area 1/2, 208	6" x 6"	Gray/Blue	Ceramic	Cove Base Tile	B	Positive	10.1	Intact	High	1,000 SF
211061-XRF-0047	Main Hospital, 1st Floor, Area 1/2, 206	-	White	Porcelain	Sink	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0048	Main Hospital, 1st Floor, Area 1/2, 206	-	White	Porcelain	Toilet	C	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0049	Main Hospital, 1st Floor, Area 1/2, 206	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Negative	0.6	Intact	N/A	N/A
211061-XRF-0050	Main Hospital, 1st Floor, Area 1/2, 206	1" x 1"	Light Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.2	Intact	N/A	N/A
211061-XRF-0051	Main Hospital, 1st Floor, Area 1/2, 206	1" x 1"	Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0052	Main Hospital, 1st Floor, Area 1/2, 206	1" x 1"	Dark Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0053	Main Hospital, 1st Floor, Area 1/2, 202	-	Red	Concrete	Baseboard	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0054	Main Hospital, 1st Floor, Area 3/4, 301	4" x 6"	Gray/Blue	Ceramic	Wall	C	Positive	10.1	Intact	High	See 0013
211061-XRF-0055	Main Hospital, 1st Floor, Area 3/4, 301	6" x 6"	Gray/Blue	Ceramic	Cove Base Tile	C	Positive	10.2	Intact	High	See 0047
211061-XRF-0056	Main Hospital, 1st Floor, Area 3/4, 301	2" x 2"	Light Gray with black spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0057	Main Hospital, 1st Floor, Area 3/4, 301	2" x 1"	Light Gray	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0058	Main Hospital, 1st Floor, Area 3/4, 301	1" x 1"	Light Gray	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0059	Main Hospital, 1st Floor, Area 3/4, 301	1" x 1"	Gray	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0060	Main Hospital, 1st Floor, Area 3/4, 301	-	White	Porcelain	Sink	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0061	Main Hospital, 1st Floor, Area 3/4, 301	-	White	Porcelain	Urinal	A	Positive	2.5	Intact	High	1 EA
211061-XRF-0062	Main Hospital, 1st Floor, Area 3/4, 301	-	White	Porcelain	Toilet	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0063	Main Hospital, 1st Floor, Area 3/4, 404	-	White	Porcelain	Bathtub	-	Negative	0.2	Intact	N/A	N/A
211061-XRF-0064	Main Hospital, 1st Floor, Area 3/4, 404	4" x 6"	Beige	Ceramic	Wall Tile	A	Positive	17.9	Intact	High	See 0018
211061-XRF-0065	Main Hospital, 1st Floor, Area 3/4, 404	6" x 6"	Beige	Ceramic	Cove Base Tile	B	Positive	17.8	Intact	High	See 0030
211061-XRF-0066	Main Hospital, 1st Floor, Area 3/4, 404	2" x 2"	Brown	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0067	Main Hospital, 1st Floor, Area 3/4, 404	2" x 1"	Tan	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0068	Main Hospital, 1st Floor, Area 3/4, 404	1" x 1"	Bronze	Ceramic	Floor Tile	-	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0069	Main Hospital, 1st Floor, Area 3/4, 410	6" x 6"	Dark Brown with White Spots	Ceramic	Wall Tile	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0070	Main Hospital, 1st Floor, Area 3/4, 410	1" x 1"	Light Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0071	Main Hospital, 1st Floor, Area 3/4, 418	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	-	Positive	17.2	Intact	High	1,000 SF

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0072	Main Hospital, 1st Floor, Area 3/4, 418	1" x 1"	Light Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.3	Intact	N/A	N/A
211061-XRF-0073	Main Hospital, 1st Floor, Area 3/4, 418	1" x 1"	Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0074	Main Hospital, 1st Floor, Area 3/4, 418	1" x 1"	Dark Brown with White Spots	Ceramic	Floor Sink	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0075	Main Hospital, 1st Floor, Area 3/4, Corridor 4	-	White	Plaster	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0076	Main Hospital, 1st Floor, Area 3/4, Corridor 4	-	White	Plaster	Wall	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0077	Main Hospital, 1st Floor, Area B-E, B34	-	Light Pink	Metal	Door	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0078	Main Hospital, 1st Floor, Area B-E, B34	-	Light Pink	Metal	Door Jamb	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0079	Main Hospital, 1st Floor, Area B-E, B34	-	Pink	Metal	Door Frame	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0080	Main Hospital, 1st Floor, Area B-E, B20	4" x 6"	Beige	Ceramic	Wall Tile	D	Positive	19.3	Intact	High	See 0018
211061-XRF-0081	Main Hospital, 1st Floor, Area B-E, B20	6" x 6"	Beige	Ceramic	Cove Base Tile	D	Positive	18.2	Intact	High	See 0030
211061-XRF-0082	Main Hospital, 1st Floor, Area B-E, E8	4" x 6"	Gray/Blue	Ceramic	Wall Tile	C	Positive	9.5	Intact	High	See 0013
211061-XRF-0083	Main Hospital, 1st Floor, Area B-E, E8	2" x 2"	Light Gray with black spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0084	Main Hospital, 1st Floor, Area B-E, E8	2" x 1"	Light Gray	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0085	Main Hospital, 1st Floor, Area B-E, E8	1" x 1"	Light Gray	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0086	Main Hospital, 1st Floor, Area B-E, E8	1" x 1"	Gray	Ceramic	Floor Tile	-	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0087	Main Hospital, 1st Floor, Area B-E, E8	-	White	Porcelain	Sink	D	Positive	33.0	Intact	High	1 EA
211061-XRF-0088	Main Hospital, 1st Floor, Area B-E, E8	-	White	Porcelain	Floor Sink	-	Positive	42.0	Intact	High	1 EA
211061-XRF-0089	Main Hospital, 1st Floor, Area B-E, B1	-	White	Plaster	Wall	A	Positive	1.7	Intact	High	See 0025
211061-XRF-0090	Main Hospital, 1st Floor, Area B-E, B1	-	White	Plaster	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0091	Main Hospital, 1st Floor, Area B-E, B1	-	White	Plaster	Wall	C	Positive	2.8	Intact	High	See 0025
211061-XRF-0092	Main Hospital, 1st Floor, Area B-E, B1	-	White	Plaster	Wall	D	Positive	1.6	Intact	High	See 0025
211061-XRF-0093	Main Hospital, 1st Floor, Area B-E, Utility Room	4" x 4"	Cream	Ceramic	Wall Tile	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0094	Main Hospital, 1st Floor, Area B-E, Utility Room	1" x 1"	White with Black Spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0095	Main Hospital, 1st Floor, Area B-E, Utility Room	1" x 1"	Light Orange	Ceramic	Floor Tile	-	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0096	Main Hospital, 1st Floor, Area B-E, Utility Room	-	White	Porcelain	Toilet	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0097	Main Hospital, 1st Floor, Area B-E, D17	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0098	Main Hospital, 1st Floor, Area B-E, D17	1" x 1"	Light Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0099	Main Hospital, 1st Floor, Area B-E, D17	1" x 1"	Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0100	Main Hospital, 1st Floor, Area B-E, D17	1" x 1"	Dark Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0101	Main Hospital, 1st Floor, Area B-E, D13	4" x 6"	Beige	Ceramic	Wall Tile	A	Positive	18.2	Intact	High	See 0030
211061-XRF-0102	Main Hospital, 1st Floor, Area B-E, D13	6" x 6"	Beige	Ceramic	Cove Base Tile	A	Positive	18.2	Intact	High	See 0030
211061-XRF-0103	Main Hospital, 1st Floor, Area B-E, D13	2" x 2"	Brown	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0104	Main Hospital, 1st Floor, Area B-E, D13	2" x 1"	Tan	Ceramic	Floor Tile	-	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0105	Main Hospital, 1st Floor, Area B-E, D13	1" x 1"	Bronze	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0106	Main Hospital, 1st Floor, Area B-E, D11	2" x 2"	Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0107	Main Hospital, 1st Floor, Area B-E, C2 Bathroom	4" x 4"	Tan	Ceramic	Wall Tile	B	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0108	Main Hospital, 1st Floor, Area B-E, C2 Bathroom	4" x 4"	Tan	Ceramic	Wall Tile	C	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0109	Main Hospital, 1st Floor, Area B-E, C2 Bathroom	4" x 4"	Tan	Ceramic	Wall Tile	D	Negative	0.3	Intact	N/A	N/A
211061-XRF-0110	Main Hospital, 1st Floor, Area B-E, C2 Bathroom	12" x 12"	Light Brown	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0111	Main Hospital, 1st Floor, Area B-E, C2	-	Yellow	Plaster	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0112	Main Hospital, 1st Floor, Area B-E, C2	-	Yellow	Plaster	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0113	Main Hospital, 1st Floor, Area B-E, C2	-	Yellow	Plaster	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0114	Main Hospital, 1st Floor, Area B-E, C2	-	Yellow	Plaster	Wall	D	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0115	Main Hospital, 1st Floor, Area B-E, C10	-	Light Brown	Plaster	Wall	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0116	Main Hospital, 1st Floor, Area B-E, C24	4" x 6"	Gray/Blue	Ceramic	Wall Tile	B	Positive	10.0	Intact	High	See 0013
211061-XRF-0117	Main Hospital, 1st Floor, Area B-E, C24	6" x 6"	Gray/Blue	Ceramic	Cove Base Tile	B	Positive	10.1	Intact	High	See 0047
211061-XRF-0118	Main Hospital, 1st Floor, Area B-E, C24	1" x 1"	Light Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0119	Main Hospital, 1st Floor, Area B-E, C24	1" x 1"	Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0120	Main Hospital, 1st Floor, Area B-E, C24	1" x 1"	Dark Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0121	Main Hospital, 1st Floor, Area B-E, C24	-	White	Porcelain	Sink	C	Positive	4.6	Intact	High	1 EA
211061-XRF-0122	Main Hospital, 1st Floor, Area B-E, C24	-	White	Porcelain	Floor Sink	-	Negative	0.4	Intact	N/A	N/A
211061-XRF-0123	Main Hospital, 1st Floor, Area 5/6, 604	-	White	Porcelain	Bathtub	D	Positive	1.0	Intact	High	1 EA
211061-XRF-0124	Main Hospital, 1st Floor, Area 5/6, 604	4" x 6"	Beige	Ceramic	Wall Tile	A	Positive	19.0	Intact	High	See 0018
211061-XRF-0125	Main Hospital, 1st Floor, Area 5/6, 604	2" x 2"	Brown	Ceramic	Floor Tile	-	Negative	0.2	Intact	N/A	N/A
211061-XRF-0126	Main Hospital, 1st Floor, Area 5/6, 604	2" x 1"	Tan	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0127	Main Hospital, 1st Floor, Area 5/6, 604	1" x 1"	Bronze	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0128	Main Hospital, 1st Floor, Area 5/6, 604	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0129	Main Hospital, 1st Floor, Area 5/6, 604	2" x 2"	Light Brown	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0130	Main Hospital, 1st Floor, Area 5/6, 611	4" x 6"	Gray/Blue	Ceramic	Wall Tile	A	Positive	10.1	Intact	High	See 0013
211061-XRF-0131	Main Hospital, 1st Floor, Area 5/6, 611	6" x 6"	Gray/Blue	Ceramic	Cove Base Tile	B	Positive	10.4	Intact	High	See 0047
211061-XRF-0132	Main Hospital, 1st Floor, Area 5/6, 611	2" x 2"	Light Gray	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0133	Main Hospital, 1st Floor, Area 5/6, 611	2" x 1"	Light Gray	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0134	Main Hospital, 1st Floor, Area 5/6, 611	1" x 1"	Gray	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0135	Main Hospital, 1st Floor, Area 5/6, 611	1" x 1"	Light Gray	Ceramic	Floor Tile	-	Negative	0.2	Intact	N/A	N/A
211061-XRF-0136	Main Hospital, 1st Floor, Area 5/6, 611	-	White	Porcelain	Toilet	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0137	Main Hospital, 1st Floor, Area 5/6, 605	-	Red	Concrete	Baseboard	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0138	Main Hospital, 1st Floor, Area 5/6, 515	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0139	Main Hospital, 1st Floor, Area 5/6, 510	-	White	Porcelain	Toilet	-	Positive	3.6	Intact	High	1 EA
211061-XRF-0140	Main Hospital, 1st Floor, Area 7/8, 706	4" x 6"	Beige	Ceramic	Wall Tile	D	Positive	17.6	Intact	High	See 0018
211061-XRF-0141	Main Hospital, 1st Floor, Area 7/8, 706	6" x 6"	Beige	Ceramic	Cove Base Tile	D	Positive	17.9	Intact	High	See 0030
211061-XRF-0142	Main Hospital, 1st Floor, Area 7/8, 706	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0143	Main Hospital, 1st Floor, Area 7/8, 706	2" x 2"	Brown	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0144	Main Hospital, 1st Floor, Area 7/8, 706	2" x 1"	Tan	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0145	Main Hospital, 1st Floor, Area 7/8, 706	1" x 1"	Bronze	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0146	Main Hospital, 1st Floor, Area 7/8, 706	1" x 1"	Light Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0147	Main Hospital, 1st Floor, Area 7/8, 706	1" x 1"	Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0148	Main Hospital, 1st Floor, Area 7/8, 706	1" x 1"	Dark Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0149	Main Hospital, 1st Floor, Area 7/8, 711	4" x 6"	Gray/Blue	Ceramic	Wall Tile	C	Positive	10.1	Intact	High	See 0013
211061-XRF-0150	Main Hospital, 1st Floor, Area 7/8, 711	6" x 6"	Gray/Blue	Ceramic	Wall Tile	C	Positive	10.0	Intact	High	See 0047
211061-XRF-0151	Main Hospital, 1st Floor, Area 7/8, 711	-	White	Porcelain	Toilet	-	Positive	4.4	Intact	High	1 EA
211061-XRF-0152	Main Hospital, 1st Floor, Area 7/8, 805	4" x 6"	Beige	Ceramic	Wall Tile	D	Positive	19.1	Intact	High	See 0018
211061-XRF-0153	Main Hospital, 1st Floor, Area 7/8, 805	6" x 6"	Beige	Ceramic	Wall Tile	D	Positive	17.2	Intact	High	See 0030
211061-XRF-0154	Main Hospital, 1st Floor, Area B-E, OR1	4" x 4"	Teal	Ceramic	Wall Tile	C	Negative	0.3	Intact	N/A	N/A
211061-XRF-0155	Main Hospital, 1st Floor, Area B-E, OR1	4" x 4"	Teal	Ceramic	Wall Tile	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0156	Main Hospital, 1st Floor, Area B-E, OR1	4" x 4"	Cream	Ceramic	Wall Tile	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0157	Main Hospital, 1st Floor, Area B-E, OR2	4" x 4"	Yellow	Ceramic	Wall Tile	C	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0158	Main Hospital, 1st Floor, Area B-E, OR3	4" x 4"	Light Blue	Ceramic	Wall Tile	C	Negative	0.3	Intact	N/A	N/A
211061-XRF-0159	Main Hospital, 1st Floor, Area B-E, S45	4" x 4"	Brown	Ceramic	Wall Tile	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0160	Main Hospital, 1st Floor, Area B-E, S24	4" x 6"	Cream	Ceramic	Cove Base Tile	C	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0161	Main Hospital, 1st Floor, Area B-E, Stair	-	Yellow	Metal	Hand Rail	B	Positive	1.9	Intact	High	1 EA
211061-XRF-0162	Main Hospital, 1st Floor, Area B-E, Stair	-	Yellow	Metal	Hand Rail	D	Positive	2.1	Intact	High	1 EA
211061-XRF-0163	Main Hospital, 1st Floor, Area B-E, D16	-	Light Green	Plaster	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0164	Main Hospital, 1st Floor, Area B-E, D16	-	Light Green	Plaster	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0165	Main Hospital, 1st Floor, Area B-E, D16	-	Dark Green	Plaster	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0166	Main Hospital, 1st Floor, Area B-E, D16	-	Dark Green	Plaster	Wall	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0167	Main Hospital, 1st Floor, Area B-E, D16	-	Dark Red	Plaster	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0168	Main Hospital, 1st Floor, Area B-E, D16	-	Dark Red	Metal	Door	C	Negative	0.3	Intact	N/A	N/A
211061-XRF-0169	Main Hospital, 1st Floor, Area B-E, D16	-	Dark Red	Metal	Door Frame	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0170	Main Hospital, 1st Floor, Area B-E, Kitchen	5" x 5"	Red	Ceramic	Floor Tile	-	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0171	Main Hospital, 1st Floor, Area B-E, Kitchen	5" x 5"	Red	Ceramic	Cove Base Tile	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0172	Main Hospital, 1st Floor, Area B-E, Walk-in Freezer 1	5" x 5"	Brown	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0173	Main Hospital, 1st Floor, Area B-E, Walk-in Freezer 1	5" x 5"	Brown	Ceramic	Cove Base Tile	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0174	Main Hospital, 1st Floor, Area 1/2, 109	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0175	Main Hospital, 1st Floor, Area 1/2, 110	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0176	Main Hospital, 1st Floor, Area 1/2, 113	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0177	Main Hospital, 1st Floor, Area 1/2, 114	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0178	Main Hospital, 1st Floor, Area 1/2, 204	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0179	Main Hospital, 1st Floor, Area 1/2, 206	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0180	Main Hospital, 1st Floor, Area 1/2, 210	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0181	Main Hospital, 1st Floor, Area 1/2, 215	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Positive	20.7	Intact	High	See 0073
211061-XRF-0182	Main Hospital, 1st Floor, Area 1/2, 216	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Positive	19.9	Intact	High	See 0073
211061-XRF-0183	Main Hospital, 1st Floor, Area 3/4, 408	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0184	Main Hospital, 1st Floor, Area 3/4, 316	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Positive	17.4	Intact	High	See 0073

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0185	Main Hospital, 1st Floor, Area 3/4, 418	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Positive	19.9	Intact	High	See 0073
211061-XRF-0186	Main Hospital, 1st Floor, Area 5/6, 508	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0187	Main Hospital, 1st Floor, Area 5/6, 512	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0188	Main Hospital, 1st Floor, Area 5/6, 513	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Positive	20.1	Intact	High	See 0073
211061-XRF-0189	Main Hospital, 1st Floor, Area 5/6, 516	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0190	Main Hospital, 1st Floor, Area 5/6, 517	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0191	Main Hospital, 1st Floor, Area 5/6, 519	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0192	Main Hospital, 1st Floor, Area 5/6, 604	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0193	Main Hospital, 1st Floor, Area 5/6, 613	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0194	Main Hospital, 1st Floor, Area 7/8, 706	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0195	Main Hospital, 1st Floor, Area 7/8, 709	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0196	Main Hospital, 1st Floor, Area 7/8, 710	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0197	Main Hospital, 1st Floor, Area 7/8, 713	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0198	Main Hospital, 1st Floor, Area 7/8, 714	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0199	Main Hospital, 1st Floor, Area 7/8, 716	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0200	Main Hospital, 1st Floor, Area 7/8, 717	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0201	Main Hospital, 1st Floor, Area 7/8, 719	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0202	Main Hospital, 1st Floor, Area 7/8, 807	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0203	Main Hospital, 1st Floor, Area 7/8, 806	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0204	Main Hospital, 1st Floor, Area 7/8, 809	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0205	Main Hospital, 1st Floor, Area 7/8, 810	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0206	Main Hospital, 1st Floor, Area 7/8, 815	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0207	Main Hospital, 1st Floor, Area 7/8, 816	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Positive	20.4	Intact	High	See 0073
211061-XRF-0208	Main Hospital, 1st Floor, Area 7/8, 817	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Positive	20.3	Intact	High	See 0073

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0209	Main Hospital, 1st Floor, Area 7/8, 819	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Positive	9.1	Intact	High	See 0073
211061-XRF-0210	Main Hospital, 1st Floor, Area B-E, D11	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.2	Intact	N/A	N/A
211061-XRF-0211	Main Hospital, 1st Floor, Area B-E, D13	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0212	Main Hospital, 1st Floor, Area B-E, D17	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0213	Main Hospital, 1st Floor, Area B-E, S19	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0214	Main Hospital, 1st Floor, Area 5/6, 612	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	C	Positive	23.3	Intact	High	See 0073
211061-XRF-0215	Main Hospital, 1st Floor, Area B-E, B20	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0216	Main Hospital, 1st Floor, Area 3/4, 319	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	B	Positive	19.3	Intact	High	See 0073
211061-XRF-0217	Main Hospital, 1st Floor, Area 3/4, 317	4" x 4"	Tan with Brown Spots	Ceramic	Wall Tile	D	Positive	19.1	Intact	High	See 0073
211061-XRF-0218	Main Hospital, Exterior C	-	Yellow	Concrete	Stair	C	Positive	1.1	Intact	High	2 SF
211061-XRF-0219	Main Hospital, Exterior C	-	Yellow	Metal	Hand Rail	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0220	Main Hospital, Exterior C	-	Red	Metal	Hydraulic Lift	C	Positive	3.3	Intact	High	10 SF
211061-XRF-0221	Main Hospital, Exterior C	-	White	Brick	Wall	C	Negative	0.2	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0222	Main Hospital, Exterior C	-	Light Blue	Metal	Door	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0223	Main Hospital, Exterior C	-	Light Blue	Metal	Door Frame	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0224	Main Hospital, Exterior C	-	White	Concrete	Column	C	Positive	0.8	Intact	High	100 SF
211061-XRF-0225	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0226	Calibration	-	-	-	NIST	-	-	0.9	-	-	-
211061-XRF-0227	Calibration	-	-	-	NIST	-	-	0.9	-	-	-
211061-XRF-0228	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0229	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0230	Calibration	-	-	-	NIST	-	-	0.9	-	-	-
211061-XRF-0231	Main Hospital, Exterior C	-	Red	Concrete	Floor	C	Negative	0.3	Intact	N/A	N/A
211061-XRF-0232	Main Hospital, Exterior C	-	White	Stucco	Wall	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0233	Main Hospital, Exterior C	-	Light Blue	Metal	Post	C	Negative	0.6	Intact	N/A	N/A
211061-XRF-0234	Main Hospital, Exterior C	-	White	Metal	Post	C	Negative	0.5	Intact	N/A	N/A
211061-XRF-0235	Main Hospital, Exterior C	-	Yellow	Concrete	Curb	C	Negative	0.3	Intact	N/A	N/A
211061-XRF-0236	Main Hospital, Exterior C	-	Light Blue	Stucco	Wall	C	Negative	0.4	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0237	Main Hospital, Exterior C	-	White	Brick	Wall	C	Negative	0.3	Intact	N/A	N/A
211061-XRF-0238	Main Hospital, Exterior C	-	Black	Metal	Plaque	C	Positive	6.5	Intact	High	2 SF
211061-XRF-0239	Main Hospital, Exterior C	-	Black	Metal	Bench	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0240	Main Hospital, Exterior D	-	White	Stucco	Wall	D	Negative	0.3	Intact	N/A	N/A
211061-XRF-0241	Main Hospital, Exterior D	-	White	Brick	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0242	Main Hospital, Exterior D	-	Light Gray	Metal	Window Grate	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0243	Main Hospital, Exterior D	-	Light Gray	Metal	Overhang	D	Positive	0.7	Intact	High	1,000 SF
211061-XRF-0244	Main Hospital, Exterior A	-	White	Brick	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0245	Main Hospital, Exterior A	-	White	Stucco	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0246	Main Hospital, Exterior A	-	Light Blue	Metal	Door	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0247	Main Hospital, Exterior A	-	Light Blue	Metal	Door Frame	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0248	Main Hospital, Exterior A	-	Light Blue	Wood	Bench	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0249	Main Hospital, Exterior A	-	Light Blue	Concrete	Table	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0250	Main Hospital, Exterior A	-	Light Blue	Metal	Door	A	Negative	0.4	Intact	N/A	N/A
211061-XRF-0251	Main Hospital, Exterior A	-	Light Blue	Metal	Door Frame	A	Negative	0.5	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0252	Main Hospital, Exterior A	-	Light Gray	Metal	Overhang	A	Negative	0.6	Intact	N/A	N/A
211061-XRF-0253	Main Hospital, Exterior A	-	Light Blue	Concrete	Partition	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0254	Main Hospital, Exterior, Awning	-	Light Blue	Metal	Post	A	Positive	12.1	Intact	High	8 EA
211061-XRF-0255	Main Hospital, Exterior, Awning	-	Light Blue	Metal	Overhang	A	Positive	7.8	Intact	High	150 SF
211061-XRF-0256	Main Hospital, Exterior A	-	Light Blue	Metal	Partition	A	Positive	2.8	Intact	High	100 SF
211061-XRF-0257	Main Hospital, Exterior A	-	White	Cinderblock	Partition	A	Negative	0.2	Intact	N/A	N/A
211061-XRF-0258	Main Hospital, Exterior A	-	White	Brick	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0259	Main Hospital, Exterior A	-	White	Stucco	Wall	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0260	Main Hospital, Exterior A	-	Light Blue	Stucco	Wall	A	Positive	1.1	Intact	High	200 SF
211061-XRF-0261	Main Hospital, Exterior B	-	White	Stucco	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0262	Main Hospital, Exterior B	-	White	Brick	Wall	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0263	Main Hospital, Exterior B	-	Light Blue	Metal	Overhang	B	Positive	0.9	Intact	High	1 EA
211061-XRF-0264	Main Hospital, Exterior B	-	Light Blue	Metal	Fence	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0265	Main Hospital, Exterior B	-	Light Blue	Metal	Hand Rail	B	Positive	1.1	Intact	High	2 EA
211061-XRF-0266	Calibration	-	-	-	NIST	-	-	1.0	-	-	-

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0267	Calibration	-	-	-	NIST	-	-	0.9	-	-	-
211061-XRF-0268	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0269	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0270	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0271	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0272	Emergency Power Building, 1st Floor, Walkway	-	Cream	Drywall	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0273	Emergency Power Building, 1st Floor, Walkway	-	Cream	Drywall	Wall	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0274	Emergency Power Building, 1st Floor, Walkway	-	Cream	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0275	Emergency Power Building, 1st Floor, Walkway	-	Cream	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0276	Emergency Power Building, 1st Floor, Walkway	-	Orange	Metal	Window Frame	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0277	Emergency Power Building, 1st Floor, Walkway	-	Orange	Metal	Door	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0278	Emergency Power Building, 1st Floor, Walkway	-	Orange	Metal	Door Frame	A	Negative	0.5	Intact	N/A	N/A
211061-XRF-0279	Emergency Power Building, 1st Floor, Walkway	-	Orange	Metal	Door Jamb	A	Negative	0.5	Intact	N/A	N/A
211061-XRF-0280	Emergency Power Building, 1st Floor, Generator Room	-	Orange	Metal	Door	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0281	Emergency Power Building, 1st Floor, Generator Room	-	Orange	Metal	Door Frame	B	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0282	Emergency Power Building, 1st Floor, Generator Room	-	Orange	Metal	Door Frame	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0283	Emergency Power Building, Exterior A	-	White	Brick	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0284	Emergency Power Building, Exterior A	-	Light Blue	Metal	Door	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0285	Emergency Power Building, Exterior A	-	Light Blue	Metal	Door Frame	A	Negative	0.5	Intact	N/A	N/A
211061-XRF-0286	Emergency Power Building, Exterior B	-	White	Brick	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0287	Emergency Power Building, Exterior C	-	White	Brick	Wall	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0288	Emergency Power Building, Exterior C	-	White	Metal	Conduit	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0289	Emergency Power Building, Exterior D	-	White	Brick	Wall	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0290	Emergency Power Building, Exterior D	-	White	Metal	Downspout	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0291	Hazardous Waste, Exterior A	-	White	Brick	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0292	Hazardous Waste, Exterior A	-	Light Blue	Metal	Door Frame	A	Negative	0.6	Intact	N/A	N/A
211061-XRF-0293	Hazardous Waste, Exterior A	-	Light Blue	Metal	Door	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0294	Hazardous Waste, Exterior B	-	White	Brick	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0295	Hazardous Waste, Exterior C	-	White	Brick	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0296	Hazardous Waste, Exterior C	-	White	Metal	Conduit	C	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0297	Hazardous Waste, Exterior C	-	White	Metal	HVAC Ducting	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0298	Hazardous Waste, Exterior C	-	White	Metal	Electrical Box	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0299	Hazardous Waste, Exterior D	-	Light Blue	Wood	Wall Panel	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0300	Hazardous Waste, Exterior D	-	White	Brick	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0301	B-01, 1st Floor, Conference Room	-	White	Drywall	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0302	B-01, 1st Floor, Conference Room	-	White	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0303	B-01, 1st Floor, Conference Room	-	White	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0304	B-01, 1st Floor, Conference Room	-	White	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0305	B-01, 1st Floor, Conference Room	-	White	Metal	Electrical Box	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0306	B-01, 1st Floor, Conference Room	-	White	Wood	Door Frame	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0307	B-01, 1st Floor, Conference Room	-	White	Wood	Door Jamb	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0308	B-01, 1st Floor, Main Corridor	-	White	Drywall	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0309	B-01, 1st Floor, Main Corridor	-	White	Drywall	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0310	B-01, 1st Floor, Main Corridor	-	White	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0311	B-01, 1st Floor, Medical Social Workers Director	-	White	Drywall	Wall	A	Negative	0.0	Intact	N/A	N/A



<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0312	B-01, 1st Floor, Medical Social Workers Director	-	White	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0313	B-01, 1st Floor, Medical Social Workers Director	-	White	Drywall	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0314	B-01, 1st Floor, Medical Social Workers Director	-	White	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0315	B-01, 1st Floor, Restroom Handicapped	-	White	Porcelain	Sink	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0316	B-01, 1st Floor, Restroom Handicapped	-	White	Porcelain	Toilet	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0317	B-01, 1st Floor, Restroom M/W	-	White	Porcelain	Toilet	C	Negative	0.4	Intact	N/A	N/A
211061-XRF-0318	B-01, 1st Floor, Restroom M/W	-	White	Porcelain	Sink	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0319	B-01, 1st Floor, W/H Closet	-	White	Wood	Shelf	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0320	B-01, 1st Floor, East Corridor	-	Blue	Wood	Door	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0321	B-01, 1st Floor, East Corridor	-	Blue	Wood	Door Frame	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0322	B-01, 1st Floor, East Corridor	-	Blue	Wood	Door Jamb	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0323	B-01, Exterior A	-	White	Wood	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0324	B-01, Exterior A	-	Light Blue	Wood	Window Frame	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0325	B-01, Exterior A	-	Light Blue	Metal	Hand Rail	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0326	B-01, Exterior A	-	White	Metal	Post	A	Negative	0.2	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0327	B-01, Exterior B	-	White	Wood	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0328	B-01, Exterior B	-	Light Blue	Wood	Window Frame	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0329	B-01, Exterior B	-	Light Blue	Metal	Hand Rail	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0330	B-01, Exterior B	-	White	Metal	Downspout	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0331	B-01, Exterior C	-	White	Wood	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0332	B-01, Exterior C	-	Light Blue	Wood	Window Frame	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0333	B-01, Exterior D	-	White	Wood	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0334	B-01, Exterior D	-	Light Blue	Wood	Window Frame	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0335	B-01, Exterior D	-	White	Metal	Electrical Box	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0336	B-01, Exterior D	-	White	Metal	Conduit	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0337	B-02, 1st Floor, Waiting Area	-	White	Drywall	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0338	B-02, 1st Floor, Waiting Area	-	White	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0339	B-02, 1st Floor, Waiting Area	-	White	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0340	B-02, 1st Floor, Waiting Area	-	White	Drywall	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0341	B-02, 1st Floor, Waiting Area	-	White	Wood	Door	A	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0342	B-02, 1st Floor, Waiting Area	-	White	Wood	Door Frame	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0343	B-02, 1st Floor, Waiting Area	-	White	Wood	Door Jamb	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0344	B-02, 1st Floor, Charting	-	White	Drywall	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0345	B-02, 1st Floor, Charting	-	White	Drywall	Wall	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0346	B-02, 1st Floor, Charting	-	White	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0347	B-02, 1st Floor, Charting	-	White	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0348	B-02, 1st Floor, Staff	-	White	Porcelain	Sink	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0349	B-02, 1st Floor, Staff	-	White	Porcelain	Toilet	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0350	B-02, 1st Floor, Staff	4" x 4"	White	Ceramic	Wall Tile	A	Negative	0.2	Intact	N/A	N/A
211061-XRF-0351	B-02, 1st Floor, Staff	4" x 4"	White	Ceramic	Wall Tile	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0352	B-02, 1st Floor, Staff	4" x 4"	White	Ceramic	Wall Tile	C	Negative	-0.5	Intact	N/A	N/A
211061-XRF-0353	B-02, 1st Floor, Staff	4" x 4"	White	Ceramic	Wall Tile	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0354	B-02, 1st Floor, Staff	4" x 4"	Yellow	Ceramic	Wall Tile	A	Negative	-0.5	Intact	N/A	N/A
211061-XRF-0355	B-02, 1st Floor, Staff	4" x 4"	Yellow	Ceramic	Wall Tile	B	Negative	-0.5	Intact	N/A	N/A
211061-XRF-0356	B-02, 1st Floor, Staff	4" x 4"	Yellow	Ceramic	Wall Tile	C	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0357	B-02, 1st Floor, Staff	4" x 4"	Yellow	Ceramic	Wall Tile	D	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0358	B-02, 1st Floor, Staff	1" x 1"	White	Ceramic	Floor Tile	-	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0359	B-02, 1st Floor, Exam Room 1	-	White	Porcelain	Sink	C	Negative	-0.5	Intact	N/A	N/A
211061-XRF-0360	B-02, 1st Floor, Exam Room 2	-	White	Porcelain	Sink	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0361	B-02, 1st Floor, Triage	-	White	Porcelain	Sink	C	Negative	0.3	Intact	N/A	N/A
211061-XRF-0362	B-02, 1st Floor, Exam Room Observation	-	White	Porcelain	Sink	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0363	B-02, 1st Floor, Work Up Area	-	White	Porcelain	Sink	D	Negative	0.3	Intact	N/A	N/A
211061-XRF-0364	B-02, 1st Floor, Exam Room 7	-	White	Porcelain	Sink	A	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0365	B-02, 1st Floor, Exam Room 6	-	White	Porcelain	Sink	A	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0366	B-02, 1st Floor, Exam Room 3	-	White	Porcelain	Sink	B	Negative	0.4	Intact	N/A	N/A
211061-XRF-0367	B-02, 1st Floor, Exam Room 5	-	White	Porcelain	Sink	C	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0368	B-02, 1st Floor, Exam Room 4	-	White	Porcelain	Sink	B	Negative	0.3	Intact	N/A	N/A
211061-XRF-0369	B-02, 1st Floor, Male	4" x 4"	Cream	Ceramic	Wall Tile	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0370	B-02, 1st Floor, Male	4" x 4"	Cream	Ceramic	Wall Tile	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0371	B-02, 1st Floor, Male	4" x 4"	Cream	Ceramic	Wall Tile	C	Negative	-0.4	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0372	B-02, 1st Floor, Male	4" x 4"	Cream	Ceramic	Wall Tile	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0373	B-02, 1st Floor, Male	4" x 4"	Brown	Ceramic	Wall Tile	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0374	B-02, 1st Floor, Male	4" x 4"	Brown	Ceramic	Wall Tile	B	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0375	B-02, 1st Floor, Male	4" x 4"	Brown	Ceramic	Wall Tile	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0376	B-02, 1st Floor, Male	4" x 4"	Brown	Ceramic	Wall Tile	D	Negative	-0.5	Intact	N/A	N/A
211061-XRF-0377	B-02, 1st Floor, Male	1" x 1"	Orange	Ceramic	Floor Tile	-	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0378	B-02, 1st Floor, Male	1" x 1"	Light Orange	Ceramic	Floor Tile	-	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0379	B-02, 1st Floor, Male	1" x 1"	Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0380	B-02, 1st Floor, Male	1" x 1"	White with Black Spots	Ceramic	Floor Tile	-	Negative	-0.6	Intact	N/A	N/A
211061-XRF-0381	B-02, 1st Floor, Female	4" x 4"	Cream	Ceramic	Wall Tile	A	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0382	B-02, 1st Floor, Female	4" x 4"	Cream	Ceramic	Wall Tile	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0383	B-02, 1st Floor, Female	4" x 4"	Cream	Ceramic	Wall Tile	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0384	B-02, 1st Floor, Female	4" x 4"	Cream	Ceramic	Wall Tile	D	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0385	B-02, 1st Floor, Female	4" x 4"	Brown	Ceramic	Wall Tile	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0386	B-02, 1st Floor, Female	4" x 4"	Brown	Ceramic	Wall Tile	B	Negative	0.4	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0387	B-02, 1st Floor, Female	4" x 4"	Brown	Ceramic	Wall Tile	C	Negative	-0.5	Intact	N/A	N/A
211061-XRF-0388	B-02, 1st Floor, Female	4" x 4"	Brown	Ceramic	Wall Tile	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0389	B-02, 1st Floor, Female	1" x 1"	Orange	Ceramic	Floor Tile	-	Negative	0.2	Intact	N/A	N/A
211061-XRF-0390	B-02, 1st Floor, Female	1" x 1"	Light Orange	Ceramic	Floor Tile	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0391	B-02, 1st Floor, Female	1" x 1"	Light Brown with White Spots	Ceramic	Floor Tile	-	Negative	0.2	Intact	N/A	N/A
211061-XRF-0392	B-02, 1st Floor, Female	1" x 1"	White with Black Spots	Ceramic	Floor Tile	-	Negative	0.2	Intact	N/A	N/A
211061-XRF-0393	B-02, 1st Floor, Female	-	White	Porcelain	Sink	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0394	B-02, 1st Floor, Female	-	White	Porcelain	Toilet	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0395	B-02, Exterior A	-	White	Metal	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0396	B-02, Exterior A	-	Light Blue	Metal	Door	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0397	B-02, Exterior A	-	Light Blue	Metal	Door Frame	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0398	B-02, Exterior A	-	Light Blue	Metal	Hand Rail	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0399	B-02, Exterior A	-	White	Metal	Post	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0400	B-02, Exterior B	-	White	Metal	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0401	B-02, Exterior C	-	White	Metal	Wall	B	Negative	-0.2	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0402	B-02, Exterior C	-	Light Blue	Metal	Door	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0403	B-02, Exterior C	-	Light Blue	Metal	Door Frame	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0404	B-02, Exterior C	-	Light Blue	Metal	Hand Rail	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0405	B-02, Exterior C	-	White	Metal	Post	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0406	B-02, Exterior C	-	White	Metal	Electrical Box	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0407	B-02, Exterior C	-	White	Metal	Conduit	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0408	B-02, Exterior D	-	White	Metal	Wall	D	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0409	B-03, 1st Floor, Peds Waiting Room	-	White	Drywall	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0410	B-03, 1st Floor, Peds Waiting Room	-	White	Drywall	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0411	B-03, 1st Floor, Peds Waiting Room	-	White	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0412	B-03, 1st Floor, Peds Waiting Room	-	White	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0413	B-03, 1st Floor, PFS Sup. Office	-	White	Drywall	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0414	B-03, 1st Floor, PFS Sup. Office	-	White	Drywall	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0415	B-03, 1st Floor, PFS Sup. Office	-	White	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0416	B-03, 1st Floor, PFS Sup. Office	-	White	Drywall	Wall	D	Negative	-0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0417	B-03, 1st Floor, Peds Waiting Room	-	Brown	Metal	Window Frame	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0418	B-03, 1st Floor, Peds Waiting Room	-	Brown	Wood	Door	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0419	B-03, 1st Floor, Peds Waiting Room	-	Brown	Wood	Door Frame	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0420	B-03, 1st Floor, Peds Waiting Room	-	Brown	Wood	Door Jamb	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0421	B-03, 1st Floor, Ops	-	Brown	Drywall	Wall	A	Negative	0.2	Intact	N/A	N/A
211061-XRF-0422	B-03, 1st Floor, Ops	-	Brown	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0423	B-03, 1st Floor, Ops	-	Brown	Drywall	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0424	B-03, 1st Floor, Ops	-	Brown	Drywall	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0425	B-03, 1st Floor, SGT Office	-	Brown	Drywall	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0426	B-03, 1st Floor, SGT Office	-	White	Drywall	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0427	B-03, 1st Floor, SGT Office	-	Brown	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0428	B-03, 1st Floor, SGT Office	-	Gold	Drywall	Wall	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0429	B-03, 1st Floor, SGT Office	-	Gold	Drywall	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0430	B-03, 1st Floor, SGT Office	-	Brown	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0431	B-03, 1st Floor, SGT Office	-	Brown	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0432	B-03, 1st Floor, SGT Office	-	Gold	Drywall	Wall	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0433	B-03, Exterior A	-	White	Metal	Wall	A	Negative	0.2	Intact	N/A	N/A
211061-XRF-0434	B-03, Exterior A	-	Light Blue	Wood	Door	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0435	B-03, Exterior A	-	Light Blue	Wood	Door Frame	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0436	B-03, Exterior A	-	Light Blue	Metal	Hand Rail	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0437	B-03, Exterior A	-	Light Blue	Metal	Downspout	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0438	B-03, Exterior B	-	White	Metal	Wall	B	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0439	B-03, Exterior B	-	White	Metal	Electrical Box	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0440	B-03, Exterior B	-	White	Metal	Conduit	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0441	B-03, Exterior B	-	Red	Metal	Pipe	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0442	B-03, Exterior B	-	Light Blue	Metal	Hand Rail	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0443	B-03, Exterior C	-	White	Metal	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0444	B-03, Exterior C	-	Light Blue	Metal	Door	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0445	B-03, Exterior C	-	Light Blue	Metal	Door Frame	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0446	B-03, Exterior C	-	Light Blue	Metal	Hand Rail	C	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0447	B-03, Exterior D	-	White	Metal	Wall	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0448	B-03, Exterior D	-	Light Blue	Metal	Hand Rail	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0449	Calibration	-	-	-	NIST	-	-	0.9	-	-	-
211061-XRF-0450	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0451	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0452	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0453	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0454	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0455	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0456	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0457	B-04, 1st Floor, Exam 14	-	Light Pink	Drywall	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0458	B-04, 1st Floor, Exam 14	-	Light Pink	Drywall	Wall	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0459	B-04, 1st Floor, Exam 14	-	Light Pink	Drywall	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0460	B-04, 1st Floor, Exam 14	-	Light Pink	Drywall	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0461	B-04, 1st Floor, Nurse's Station	-	Light Pink	Drywall	Wall	A	Negative	-0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0462	B-04, 1st Floor, Nurse's Station	-	Light Pink	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0463	B-04, 1st Floor, Nurse's Station	-	Light Pink	Drywall	Wall	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0464	B-04, 1st Floor, Nurse's Station	-	Light Pink	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0465	B-04, 1st Floor, Waiting Area	-	Light Pink	Drywall	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0466	B-04, 1st Floor, Waiting Area	-	Light Pink	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0467	B-04, 1st Floor, Waiting Area	-	Light Pink	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0468	B-04, 1st Floor, Waiting Area	-	Light Pink	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0469	B-04, 1st Floor, Observation Room 102	-	Light Pink	Drywall	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0470	B-04, 1st Floor, Observation Room 102	-	Light Pink	Drywall	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0471	B-04, 1st Floor, Observation Room 102	-	Light Pink	Drywall	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0472	B-04, 1st Floor, Observation Room 102	-	Light Pink	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0473	B-04, 1st Floor, Supply Room 108	-	Light Pink	Drywall	Wall	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0474	B-04, 1st Floor, Supply Room 108	-	Light Pink	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0475	B-04, 1st Floor, Supply Room 108	-	Light Pink	Drywall	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0476	B-04, 1st Floor, Supply Room 108	-	Light Pink	Drywall	Wall	D	Negative	-0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0477	B-04, 1st Floor, Staff Restroom	-	White	Porcelain	Sink	D	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0478	B-04, 1st Floor, Staff Restroom	-	White	Porcelain	Toilet	A	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0479	B-04, 1st Floor, Room 116	-	White	Porcelain	Sink	C	Negative	0.4	Intact	N/A	N/A
211061-XRF-0480	B-04, 1st Floor, Exam 5	-	White	Porcelain	Sink	C	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0481	B-04, 1st Floor, Exam 3	-	White	Porcelain	Sink	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0482	B-04, 1st Floor, Observation Room 101	-	White	Porcelain	Sink	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0483	B-04, 1st Floor, Exam 13	-	White	Porcelain	Sink	C	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0484	B-04, 1st Floor, Exam 14	-	White	Porcelain	Sink	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0485	B-04, 1st Floor, Restroom 1	-	White	Porcelain	Sink	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0486	B-04, 1st Floor, Restroom 1	-	White	Porcelain	Toilet	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0487	B-04, 1st Floor, Restroom 2	-	White	Porcelain	Toilet	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0488	B-04, 1st Floor, Observation Room 101	-	Light Pink	Wood	Door	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0489	B-04, 1st Floor, Observation Room 101	-	Light Pink	Metal	Door Frame	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0490	B-04, 1st Floor, Observation Room 101	-	Light Pink	Metal	Door Frame	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0491	B-04, 1st Floor, Exam 3	-	Light Pink	Metal	Door Frame	D	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0492	B-04, 1st Floor, Exam 3	-	Light Pink	Wood	Door	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0493	B-04, 1st Floor, Exam 13	-	Light Pink	Wood	Door	B	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0494	B-04, 1st Floor, Exam 13	-	Light Pink	Metal	Door Frame	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0495	B-04, 1st Floor, Utility Room 106	-	White	Porcelain	Toilet	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0496	B-04, 1st Floor, Utility Room 106	-	White	Porcelain	Sink	A	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0497	B-04, Exterior A	-	White	Wood	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0498	B-04, Exterior A	-	Light Blue	Metal	Door Frame	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0499	B-04, Exterior A	-	Light Blue	Metal	Door	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0500	B-04, Exterior A	-	Light Blue	Metal	Hand Rail	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0501	B-04, Exterior A	-	Light Blue	Wood	Siding	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0502	B-04, Exterior A	-	Light Blue	Wood	Window Frame	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0503	B-04, Exterior A	-	White	Stucco	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0504	B-04, Exterior B	-	White	Wood	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0505	B-04, Exterior B	-	Light Blue	Wood	Siding	B	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0506	B-04, Exterior B	-	White	Metal	Conduit	B	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0507	B-04, Exterior C	-	White	Wood	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0508	B-04, Exterior C	-	Light Blue	Wood	Window Frame	C	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0509	B-04, Exterior C	-	Light Blue	Metal	Hand Rail	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0510	B-04, Exterior D	-	White	Wood	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0511	B-04, Exterior D	-	Light Blue	Wood	Window Frame	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0512	B-04, Exterior D	-	Light Blue	Wood	Siding	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0513	B-05, 1st Floor, Main Lobby	-	White	Drywall	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0514	B-05, 1st Floor, Main Lobby	-	White	Drywall	Wall	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0515	B-05, 1st Floor, Main Lobby	-	White	Drywall	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0516	B-05, 1st Floor, Main Lobby	-	White	Drywall	Wall	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0517	B-05, 1st Floor, Pharmacy	-	White	Drywall	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0518	B-05, 1st Floor, Pharmacy	-	White	Drywall	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0519	B-05, 1st Floor, Pharmacy	-	White	Drywall	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0520	B-05, 1st Floor, Pharmacy	-	White	Drywall	Wall	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0521	B-05, 1st Floor, Exam Room 3	-	White	Drywall	Wall	A	Negative	-0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0522	B-05, 1st Floor, Exam Room 3	-	White	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0523	B-05, 1st Floor, Exam Room 3	-	White	Drywall	Wall	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0524	B-05, 1st Floor, Exam Room 3	-	White	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0525	B-05, 1st Floor, Office 3	-	White	Drywall	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0526	B-05, 1st Floor, Office 3	-	White	Drywall	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0527	B-05, 1st Floor, Office 3	-	White	Drywall	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0528	B-05, 1st Floor, Office 3	-	White	Drywall	Wall	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0529	B-05, 1st Floor, Restroom 3	-	White	Porcelain	Sink	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0530	B-05, 1st Floor, Restroom 3	-	White	Porcelain	Toilet	B	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0531	B-05, 1st Floor, Restroom 1	-	White	Porcelain	Sink	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0532	B-05, 1st Floor, Restroom 1	-	White	Porcelain	Toilet	B	Negative	0.3	Intact	N/A	N/A
211061-XRF-0533	B-05, 1st Floor, Restroom 2	-	White	Porcelain	Sink	D	Negative	0.5	Intact	N/A	N/A
211061-XRF-0534	B-05, 1st Floor, Restroom 2	-	White	Porcelain	Toilet	D	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0535	B-05, 1st Floor, Restroom 4	-	White	Porcelain	Toilet	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0536	B-05, 1st Floor, Restroom 4	-	White	Porcelain	Sink	B	Negative	0.2	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0537	B-05, 1st Floor, West Corridor	-	Brown	Wood	Door	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0538	B-05, Exterior A	-	White	Wood	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0539	B-05, Exterior A	-	Light Blue	Wood	Window Frame	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0540	B-05, Exterior A	-	Light Blue	Metal	Hand Rail	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0541	B-05, Exterior A	-	White	Stucco	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0542	B-05, Exterior A	-	Light Blue	Wood	Post	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0543	B-05, Exterior A	-	Light Blue	Metal	Downspout	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0544	B-05, Exterior B	-	White	Wood	Wall	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0545	B-05, Exterior B	-	White	Metal	Conduit	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0546	B-05, Exterior B	-	White	Metal	Electrical Box	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0547	B-05, Exterior B	-	Light Blue	Metal	Hand Rail	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0548	B-05, Exterior C	-	White	Metal	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0549	B-05, Exterior C	-	Light Blue	Wood	Door Frame	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0550	B-05, Exterior C	-	Light Blue	Wood	Door	C	Negative	0.3	Intact	N/A	N/A
211061-XRF-0551	B-05, Exterior C	-	Light Blue	Metal	Hand Rail	C	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0552	B-05, Exterior C	-	White	Wood	Overhang	C	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0553	B-05, Exterior D	-	White	Wood	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0554	B-05, Exterior D	-	Light Blue	Wood	Window Frame	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0555	B-06, 1st Floor, Conference Room	-	White	Wood	Door Frame	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0556	B-06, 1st Floor, Restroom 1	-	White	Porcelain	Sink	D	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0557	B-06, 1st Floor, Restroom 1	-	White	Porcelain	Toilet	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0558	B-06, 1st Floor, Conference Room	-	White	Drywall	Wallpaper	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0559	B-06, 1st Floor, Conference Room	-	White	Drywall	Wallpaper	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0560	B-06, 1st Floor, Conference Room	-	White	Drywall	Wallpaper	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0561	B-06, 1st Floor, Conference Room	-	White	Drywall	Wallpaper	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0562	B-06, 1st Floor, Restroom 2	-	White	Porcelain	Sink	B	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0563	B-06, 1st Floor, Restroom 2	-	White	Porcelain	Toilet	B	Negative	0.4	Intact	N/A	N/A
211061-XRF-0564	B-06, 1st Floor, Water Heater Closet	-	White	Wood	Wall	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0565	B-06, 1st Floor, Security	-	White	Drywall	Wallpaper	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0566	B-06, 1st Floor, Security	-	White	Drywall	Wallpaper	B	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0567	B-06, 1st Floor, Security	-	White	Drywall	Wallpaper	C	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0568	B-06, 1st Floor, Security	-	White	Drywall	Wallpaper	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0569	B-06, Exterior A	-	White	Wood	Wall	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0570	B-06, Exterior A	-	Light Blue	Wood	Door	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0571	B-06, Exterior A	-	Light Blue	Wood	Door Frame	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0572	B-06, Exterior A	-	Light Blue	Wood	Window Frame	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0573	B-06, Exterior B	-	White	Metal	Conduit	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0574	B-06, Exterior D	-	White	Wood	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0575	B-06, Exterior D	-	Light Blue	Wood	Window Frame	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0576	B-06, Exterior D	-	Light Blue	Metal	Hand Rail	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0577	B-07, 1st Floor, Office 1	-	Beige	Drywall	Wallpaper	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0578	B-07, 1st Floor, Office 1	-	Beige	Drywall	Wallpaper	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0579	B-07, 1st Floor, Office 1	-	Beige	Drywall	Wallpaper	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0580	B-07, 1st Floor, Office 1	-	Beige	Drywall	Wallpaper	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0581	B-07, 1st Floor, Office 6	-	Beige	Drywall	Wallpaper	A	Negative	0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0582	B-07, 1st Floor, Office 6	-	Beige	Drywall	Wallpaper	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0583	B-07, 1st Floor, Office 6	-	Beige	Drywall	Wallpaper	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0584	B-07, 1st Floor, Office 6	-	Beige	Drywall	Wallpaper	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0585	B-07, 1st Floor, Waiting Area	-	Beige	Drywall	Wallpaper	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0586	B-07, 1st Floor, Waiting Area	-	Beige	Drywall	Wallpaper	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0587	B-07, 1st Floor, Waiting Area	-	Beige	Drywall	Wallpaper	C	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0588	B-07, 1st Floor, Waiting Area	-	Beige	Drywall	Wallpaper	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0589	B-07, 1st Floor, Library	-	Beige	Drywall	Wallpaper	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0590	B-07, 1st Floor, Library	-	Beige	Drywall	Wallpaper	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0591	B-07, 1st Floor, Library	-	Beige	Drywall	Wallpaper	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0592	B-07, 1st Floor, Library	-	Beige	Drywall	Wallpaper	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0593	B-07, 1st Floor, Restroom 1	-	White	Porcelain	Sink	A	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0594	B-07, 1st Floor, Restroom 1	-	White	Porcelain	Toilet	B	Negative	0.3	Intact	N/A	N/A
211061-XRF-0595	B-07, 1st Floor, Restroom 2	-	White	Porcelain	Sink	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0596	B-07, 1st Floor, Restroom 2	-	White	Porcelain	Toilet	A	Negative	-0.3	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0597	B-07, 1st Floor, Restroom 3	-	White	Porcelain	Sink	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0598	B-07, 1st Floor, Restroom 3	-	White	Fiberglass	Shower	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0599	B-07, 1st Floor, Restroom 4	-	White	Fiberglass	Shower	B	Negative	0.2	Intact	N/A	N/A
211061-XRF-0600	B-07, 1st Floor, Restroom 4	-	White	Porcelain	Sink	D	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0601	B-07, 1st Floor, Janitor	-	White	Porcelain	Floor Sink	C	Positive	12.1	Intact	High	1 EA
211061-XRF-0602	B-07, Exterior A	-	White	Wood	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0603	B-07, Exterior A	-	Light Blue	Wood	Door Frame	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0604	B-07, Exterior A	-	Light Blue	Wood	Door	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0605	B-07, Exterior A	-	Light Blue	Metal	Hand Rail	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0606	B-07, Exterior A	-	White	Stucco	Stair	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0607	B-07, Exterior A	-	White	Metal	Electrical Box	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0608	B-07, Exterior A	-	White	Metal	Conduit	A	Negative	0.4	Intact	N/A	N/A
211061-XRF-0609	B-07, Exterior B	-	White	Wood	Wall	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0610	B-07, Exterior B	-	Light Blue	Wood	Window Frame	B	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0611	B-07, Exterior C	-	White	Wood	Wall	C	Negative	-0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0612	B-07, Exterior C	-	Light Blue	Wood	Window Frame	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0613	B-07, Exterior D	-	White	Wood	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0614	B-07, Exterior D	-	Light Blue	Wood	Window Frame	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0615	B-07, Exterior D	-	Light Blue	Metal	Post	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0616	B-07, Exterior D	-	Light Blue	Wood	Door	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0617	B-07, Exterior D	-	Light Blue	Wood	Door Frame	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0618	B-08, 1st Floor, Administration	-	Light Green	Drywall	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0619	B-08, 1st Floor, Administration	-	Light Green	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0620	B-08, 1st Floor, Administration	-	Light Green	Drywall	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0621	B-08, 1st Floor, Administration	-	Light Green	Drywall	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0622	B-08, 1st Floor, Administration	-	Light Green	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0623	B-08, 1st Floor, Office 5	-	Light Green	Drywall	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0624	B-08, 1st Floor, Office 5	-	Light Green	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0625	B-08, 1st Floor, Office 5	-	Light Green	Drywall	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0626	B-08, 1st Floor, Office 5	-	Light Green	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0627	B-08, 1st Floor, Office 8	-	Light Green	Drywall	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0628	B-08, 1st Floor, Office 8	-	Light Green	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0629	B-08, 1st Floor, Office 8	-	Light Green	Drywall	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0630	B-08, 1st Floor, Office 8	-	Light Green	Drywall	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0631	B-08, 1st Floor, Office 11	-	Light Green	Drywall	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0632	B-08, 1st Floor, Office 11	-	Light Green	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0633	B-08, 1st Floor, Office 11	-	Light Green	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0634	B-08, 1st Floor, Office 11	-	Light Green	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0635	B-08, 1st Floor, South Corridor	-	Green	Metal	Door	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0636	B-08, 1st Floor, South Corridor	-	Green	Metal	Door Frame	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0637	B-08, 1st Floor, South Corridor	-	Green	Metal	Door Jamb	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0638	B-08, 1st Floor, RR 1	-	White	Porcelain	Sink	A	Negative	-0.5	Intact	N/A	N/A
211061-XRF-0639	B-08, 1st Floor, RR 1	-	White	Porcelain	Toilet	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0640	B-08, 1st Floor, RR 2	-	White	Porcelain	Toilet	B	Negative	-0.5	Intact	N/A	N/A
211061-XRF-0641	B-08, 1st Floor, RR 2	-	White	Porcelain	Sink	D	Negative	-0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0642	B-08, Exterior A	-	White	Wood	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0643	B-08, Exterior A	-	Light Blue	Wood	Window Frame	A	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0644	B-08, Exterior A	-	Light Blue	Wood	Siding	A	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0645	B-08, Exterior A	-	Light Blue	Metal	Hand Rail	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0646	B-08, Exterior A	-	Light Blue	Metal	Door	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0647	B-08, Exterior A	-	Light Blue	Metal	Door Frame	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0648	B-08, Exterior B	-	White	Wood	Wall	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0649	B-08, Exterior B	-	Light Blue	Wood	Window Frame	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0650	B-08, Exterior B	-	Light Blue	Metal	Door	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0651	B-08, Exterior B	-	Light Blue	Metal	Door Frame	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0652	B-08, Exterior B	-	Light Blue	Metal	Hand Rail	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0653	B-08, Exterior B	-	Light Blue	Wood	Siding	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0654	B-08, Exterior C	-	White	Wood	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0655	B-08, Exterior C	-	Light Blue	Wood	Window Frame	C	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0656	B-08, Exterior C	-	Light Blue	Metal	Door	C	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0657	B-08, Exterior C	-	Light Blue	Metal	Door Frame	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0658	B-08, Exterior C	-	Light Blue	Wood	Siding	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0659	B-08, Exterior C	-	Light Blue	Metal	Hand Rail	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0660	B-08, Exterior C	-	White	Stucco	Wall	C	Negative	0.3	Intact	N/A	N/A
211061-XRF-0661	B-08, Exterior D	-	White	Wood	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0662	B-08, Exterior D	-	Light Blue	Wood	Window Frame	D	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0663	B-08, Exterior D	-	Light Blue	Wood	Siding	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0664	B-08, Exterior D	-	White	Metal	Shelf	D	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0665	B-10, 1st Floor, Main Area	-	White	Drywall	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0666	B-10, 1st Floor, Main Area	-	White	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0667	B-10, 1st Floor, Main Area	-	White	Drywall	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0668	B-10, 1st Floor, Main Area	-	White	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0669	B-10, 1st Floor, Bathroom 1	-	White	Porcelain	Sink	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0670	B-10, 1st Floor, Bathroom 1	-	White	Porcelain	Toilet	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0671	B-10, 1st Floor, Bathroom 2	-	White	Porcelain	Toilet	C	Negative	-0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0672	B-10, 1st Floor, Bathroom 2	-	White	Porcelain	Sink	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0673	B-10, Exterior A	-	White	Wood	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0674	B-10, Exterior A	-	Light Blue	Wood	Door	A	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0675	B-10, Exterior A	-	Light Blue	Wood	Door Frame	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0676	B-10, Exterior A	-	Light Blue	Wood	Window Frame	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0677	B-10, Exterior A	-	Light Blue	Wood	Hand Rail	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0678	B-10, Exterior A	-	Light Blue	Wood	Post	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0679	B-10, Exterior A	-	Light Blue	Wood	Overhang	A	Negative	-0.4	Intact	N/A	N/A
211061-XRF-0680	B-10, Exterior B	-	White	Wood	Wall	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0681	B-10, Exterior B	-	Light Blue	Wood	Siding	B	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0682	B-10, Exterior C	-	Light Blue	Wood	Siding	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0683	B-10, Exterior C	-	Light Blue	Wood	Window Frame	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0684	B-10, Exterior C	-	White	Wood	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0685	B-10, Exterior D	-	White	Wood	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0686	B-10, Exterior D	-	Light Blue	Wood	Siding	D	Negative	-0.1	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0687	B-10, Exterior D	-	Light Blue	Metal	Trailer Tongue	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0688	B-11, 1st Floor, Work Area	-	Gray/Blue	Drywall	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0689	B-11, 1st Floor, Work Area	-	Gray/Blue	Drywall	Wall	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0690	B-11, 1st Floor, Work Area	-	Gray/Blue	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0691	B-11, 1st Floor, Work Area	-	Gray/Blue	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0692	B-11, 1st Floor, Kitchen 2	-	White	Drywall	Wall	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0693	B-11, 1st Floor, Kitchen 2	-	White	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0694	B-11, 1st Floor, Kitchen 2	-	White	Drywall	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0695	B-11, 1st Floor, Kitchen 2	-	White	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0696	B-11, 1st Floor, Kitchen 2	-	Gray	Concrete	Floor	-	Negative	0.1	Intact	N/A	N/A
211061-XRF-0697	B-11, 1st Floor, Conference Room	-	White	Drywall	Wall	A	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0698	B-11, 1st Floor, Conference Room	-	White	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0699	B-11, 1st Floor, Conference Room	-	White	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0700	B-11, 1st Floor, Conference Room	-	White	Drywall	Wall	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0701	B-11, 1st Floor, Office 2	-	Green	Drywall	Wall	A	Negative	-0.1	Intact	N/A	N/A



<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0702	B-11, 1st Floor, Office 2	-	Green	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0703	B-11, 1st Floor, Office 2	-	Green	Drywall	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0704	B-11, 1st Floor, Office 2	-	Green	Drywall	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0705	B-11, 1st Floor, Restroom	-	White	Porcelain	Toilet	B	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0706	B-11, 1st Floor, Restroom	-	White	Porcelain	Sink	D	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0707	B-11, 1st Floor, Entry	-	Light Blue	Wood	Door	A	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0708	B-11, 1st Floor, Entry	-	White	Wood	Door Frame	A	Negative	0.3	Intact	N/A	N/A
211061-XRF-0709	B-11, 1st Floor, Entry	-	Light Blue	Wood	Door Jamb	A	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0710	B-11, Exterior A	-	White	Stucco	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0711	B-11, Exterior A	-	Light Blue	Wood	Overhang	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0712	B-11, Exterior B	-	White	Stucco	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0713	B-11, Exterior B	-	White	Metal	Conduit	B	Negative	0.1	Intact	N/A	N/A
211061-XRF-0714	B-11, Exterior C	-	White	Stucco	Wall	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0715	B-11, Exterior C	-	White	Metal	Pipe	C	Negative	0.2	Intact	N/A	N/A
211061-XRF-0716	B-11, Exterior D	-	White	Stucco	Wall	D	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0717	B-11, Exterior D	-	Yellow	Metal	Post	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0718	B-11, Exterior D	-	Gray	Metal	Hand Rail	D	Negative	0.2	Intact	N/A	N/A
211061-XRF-0719	B-12, 1st Floor, Open Area	-	White	Wood	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0720	B-12, 1st Floor, Open Area	-	White	Wood	Wall	B	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0721	B-12, 1st Floor, Open Area	-	White	Wood	Wall	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0722	B-12, 1st Floor, Open Area	-	White	Wood	Window Frame	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0723	B-12, 1st Floor, Open Area	-	White	Porcelain	Sink	B	Positive	48.0	Intact	High	1 EA
211061-XRF-0724	B-12, 1st Floor, Bathroom	-	White	Drywall	Wall	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0725	B-12, 1st Floor, Bathroom	-	White	Drywall	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0726	B-12, 1st Floor, Bathroom	-	White	Drywall	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0727	B-12, 1st Floor, Bathroom	-	White	Drywall	Wall	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0728	B-12, 1st Floor, Bathroom	-	White	Porcelain	Sink	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0729	B-12, 1st Floor, Bathroom	-	White	Porcelain	Toilet	C	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0730	B-12, 1st Floor, Bathroom	-	Gray	Metal	Door	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0731	B-12, 1st Floor, Bathroom	-	Gray	Metal	Door Frame	A	Negative	0.0	Intact	N/A	N/A

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0732	B-12, 1st Floor, Bathroom	-	Gray	Metal	Door Jamb	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0733	B-12, Exterior D	-	White	Stucco	Wall	D	Negative	0.0	Intact	N/A	N/A
211061-XRF-0734	B-13, 1st Floor, Open Area	-	White	Drywall	Wall	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0735	B-13, 1st Floor, Open Area	-	Blue	Wood	Wall	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0736	B-13, 1st Floor, Open Area	-	Dark Blue	Wood	Door Frame	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0737	B-13, 1st Floor, Open Area	-	Dark Blue	Wood	Door	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0738	B-13, 1st Floor, Open Area	-	Dark Blue	Wood	Door Jamb	B	Negative	0.0	Intact	N/A	N/A
211061-XRF-0739	B-13, 1st Floor, Open Area	-	White	Drywall	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0740	B-13, 1st Floor, Market	-	White	Drywall	Wall	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0741	B-13, 1st Floor, Bank	-	White	Drywall	Wall	C	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0742	B-13, 1st Floor, Open Area	-	Gray	Concrete	Floor	-	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0743	B-13, 1st Floor, Open Area	-	Yellow	Concrete	Curb	-	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0744	B-13, 1st Floor, Bathroom	4" x 4"	Brown	Ceramic	Wall Tile	A	Positive	30.0	Intact	High	100 SF
211061-XRF-0745	B-13, 1st Floor, Bathroom	4" x 4"	Brown	Ceramic	Wall Tile	B	Positive	8.2	Intact	High	See 0744
211061-XRF-0746	B-13, 1st Floor, Bathroom	4" x 4"	Brown	Ceramic	Wall Tile	C	Positive	23.4	Intact	High	See 0744



<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm²</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0747	B-13, 1st Floor, Bathroom	4" x 4"	Brown	Ceramic	Wall Tile	D	Positive	23.6	Intact	High	See 0744
211061-XRF-0748	B-13, 1st Floor, Bathroom	2" x 2"	Light Brown	Ceramic	Floor Tile	-	Negative	0.0	Intact	N/A	N/A
211061-XRF-0749	B-13, 1st Floor, Bathroom	-	White	Porcelain	Sink	D	Negative	-0.2	Intact	N/A	N/A
211061-XRF-0750	B-13, 1st Floor, Bathroom	-	White	Porcelain	Toilet	D	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0751	B-13, 1st Floor, Bathroom	-	White	Wood	Door Frame	D	Negative	0.1	Intact	N/A	N/A
211061-XRF-0752	B-13, Exterior A	-	White	Stucco	Wall	A	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0753	B-13, Exterior A	-	Light Blue	Metal	Door	A	Negative	0.1	Intact	N/A	N/A
211061-XRF-0754	B-13, Exterior A	-	Light Blue	Metal	Door Frame	A	Negative	0.0	Intact	N/A	N/A
211061-XRF-0755	B-13, Exterior B	-	White	Stucco	Wall	B	Negative	-0.3	Intact	N/A	N/A
211061-XRF-0756	B-13, Exterior C	-	White	Stucco	Wall	C	Negative	-0.1	Intact	N/A	N/A
211061-XRF-0757	B-13, Exterior C	-	White	Metal	HVAC Unit	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0758	B-13, Exterior C	-	Light Blue	Metal	Door	C	Negative	0.0	Intact	N/A	N/A
211061-XRF-0759	B-13, Exterior C	-	Light Blue	Metal	Door Frame	C	Negative	0.1	Intact	N/A	N/A
211061-XRF-0760	B-13, Exterior D	-	White	Stucco	Wall	D	Negative	0.4	Intact	N/A	N/A
211061-XRF-0761	Calibration	-	-	-	NIST	-	-	1.0	-	-	-

<u>Sample Number</u>	<u>Sample Location</u>	<u>Dimension</u>	<u>Color</u>	<u>Substrate</u>	<u>Component</u>	<u>Side</u>	<u>Pos/Neg</u>	<u>Reading mg/cm2</u>	<u>Cond.</u>	<u>Access.</u>	<u>Est. Qty.</u>
211061-XRF-0762	Calibration	-	-	-	NIST	-	-	1.0	-	-	-
211061-XRF-0763	Calibration	-	-	-	NIST	-	-	1.1	-	-	-

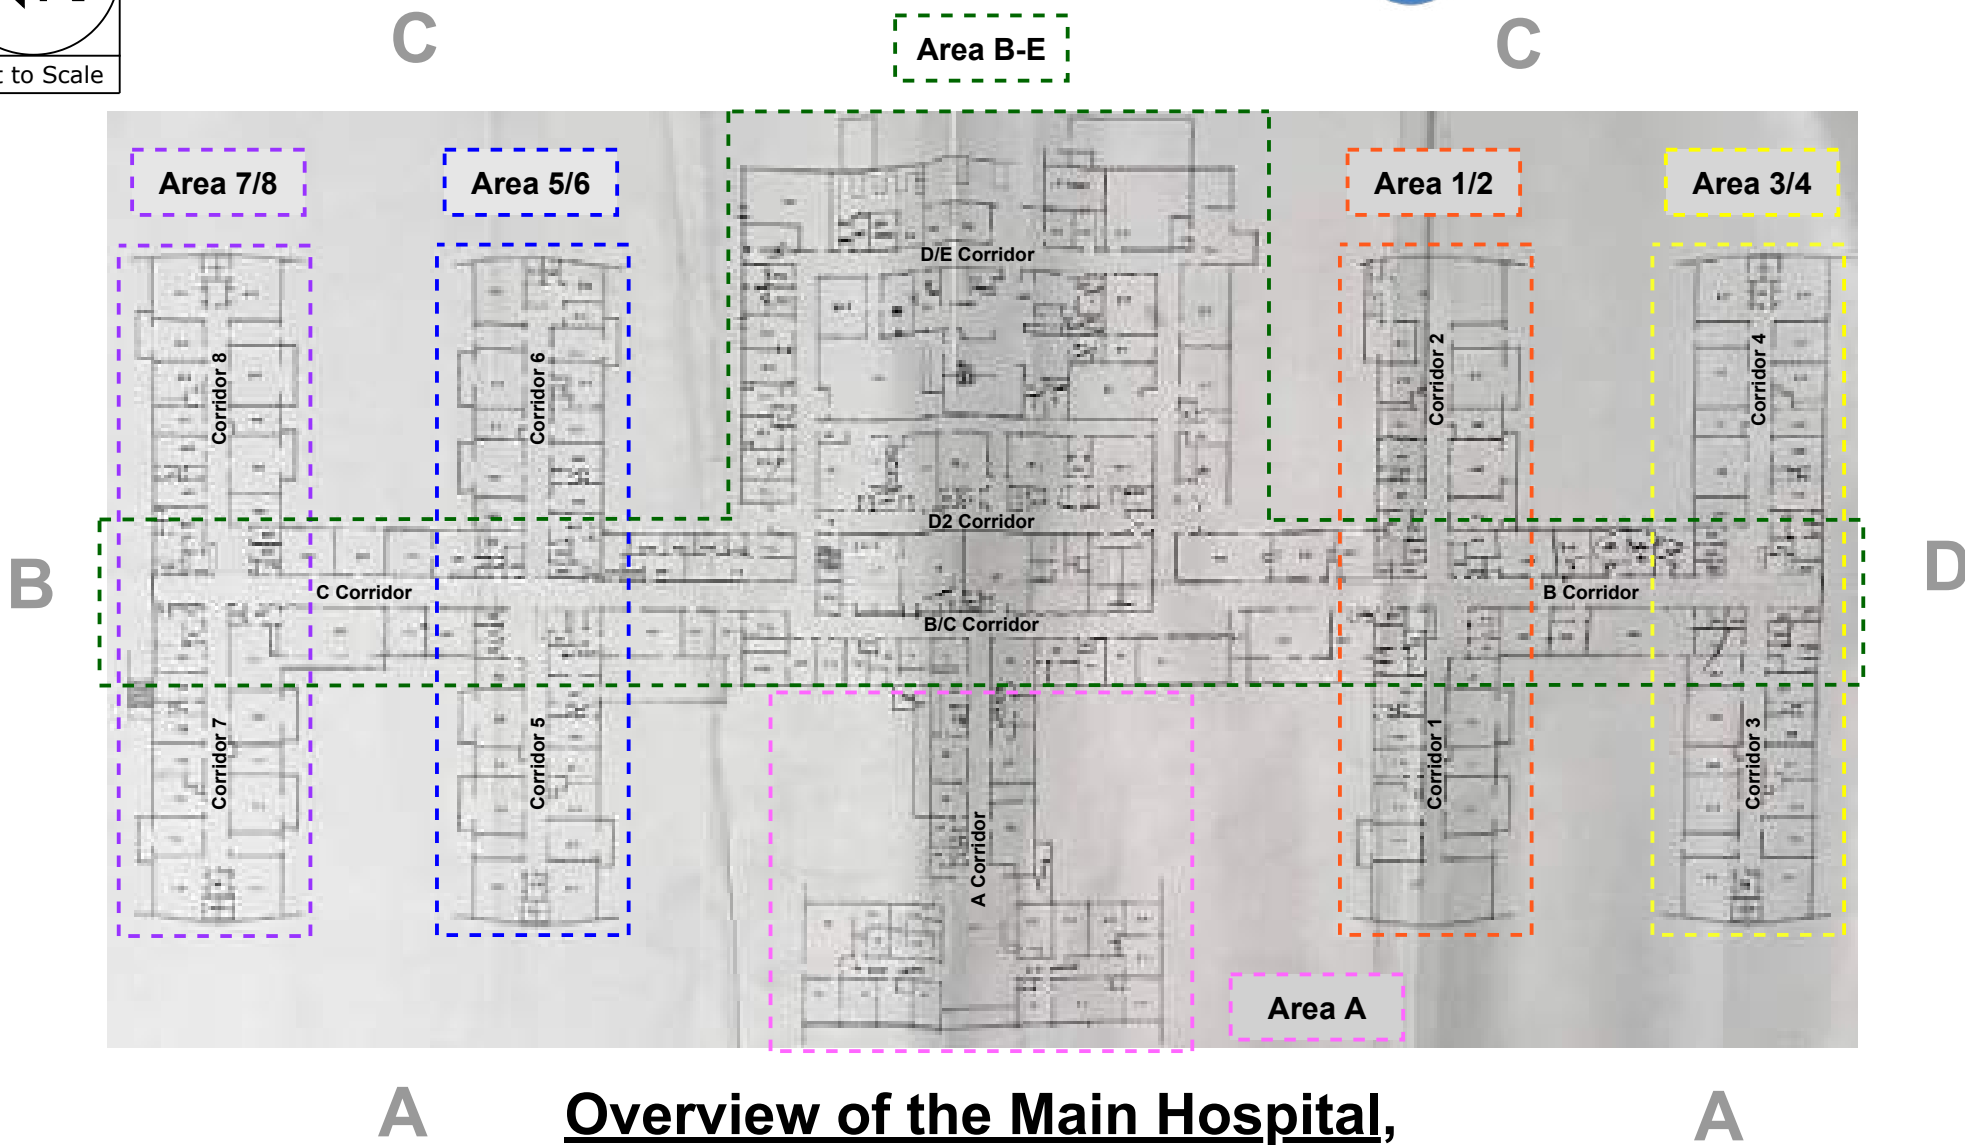

Overview of the Main Hospital,
1st Floor

Site Drawing - Lead - Page 1 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch-211061	County of Los Angeles, Department of Public Works

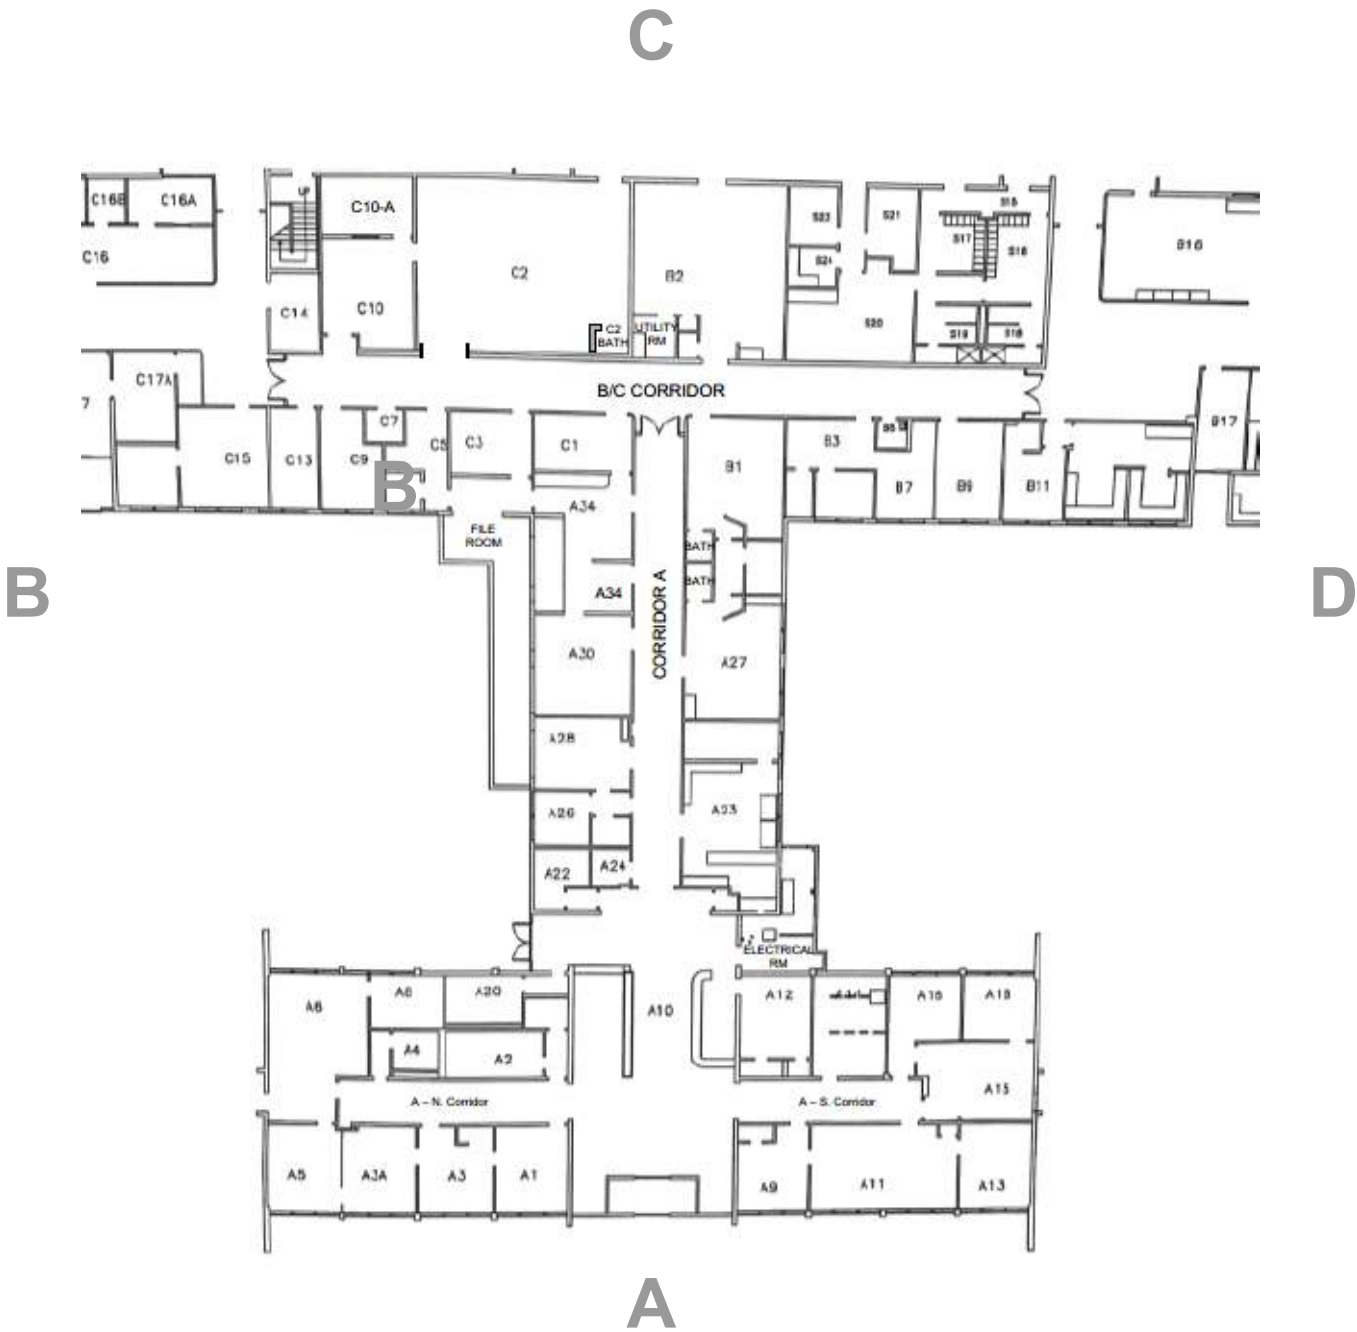


Main Hospital, 1st Floor

Site Drawing - Lead - Page 2 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

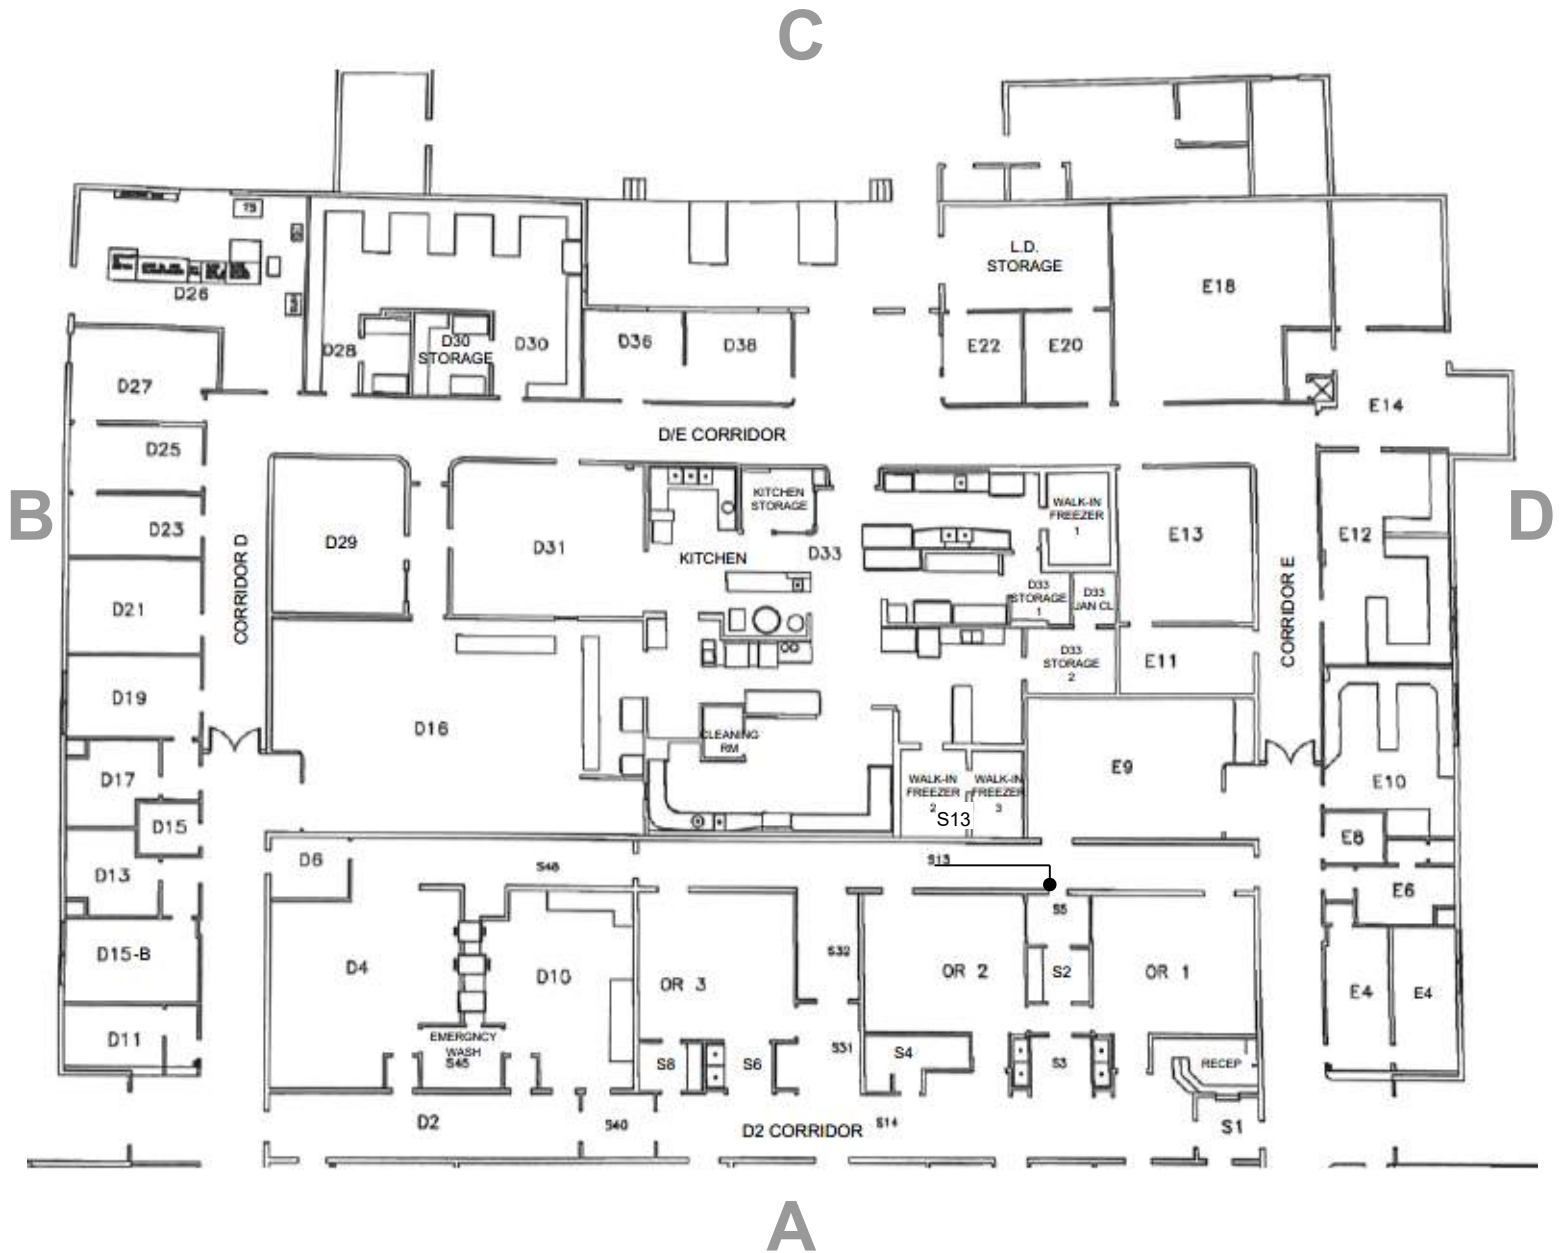


Main Hospital, 1st Floor

C



A-Tech Consulting, Inc.

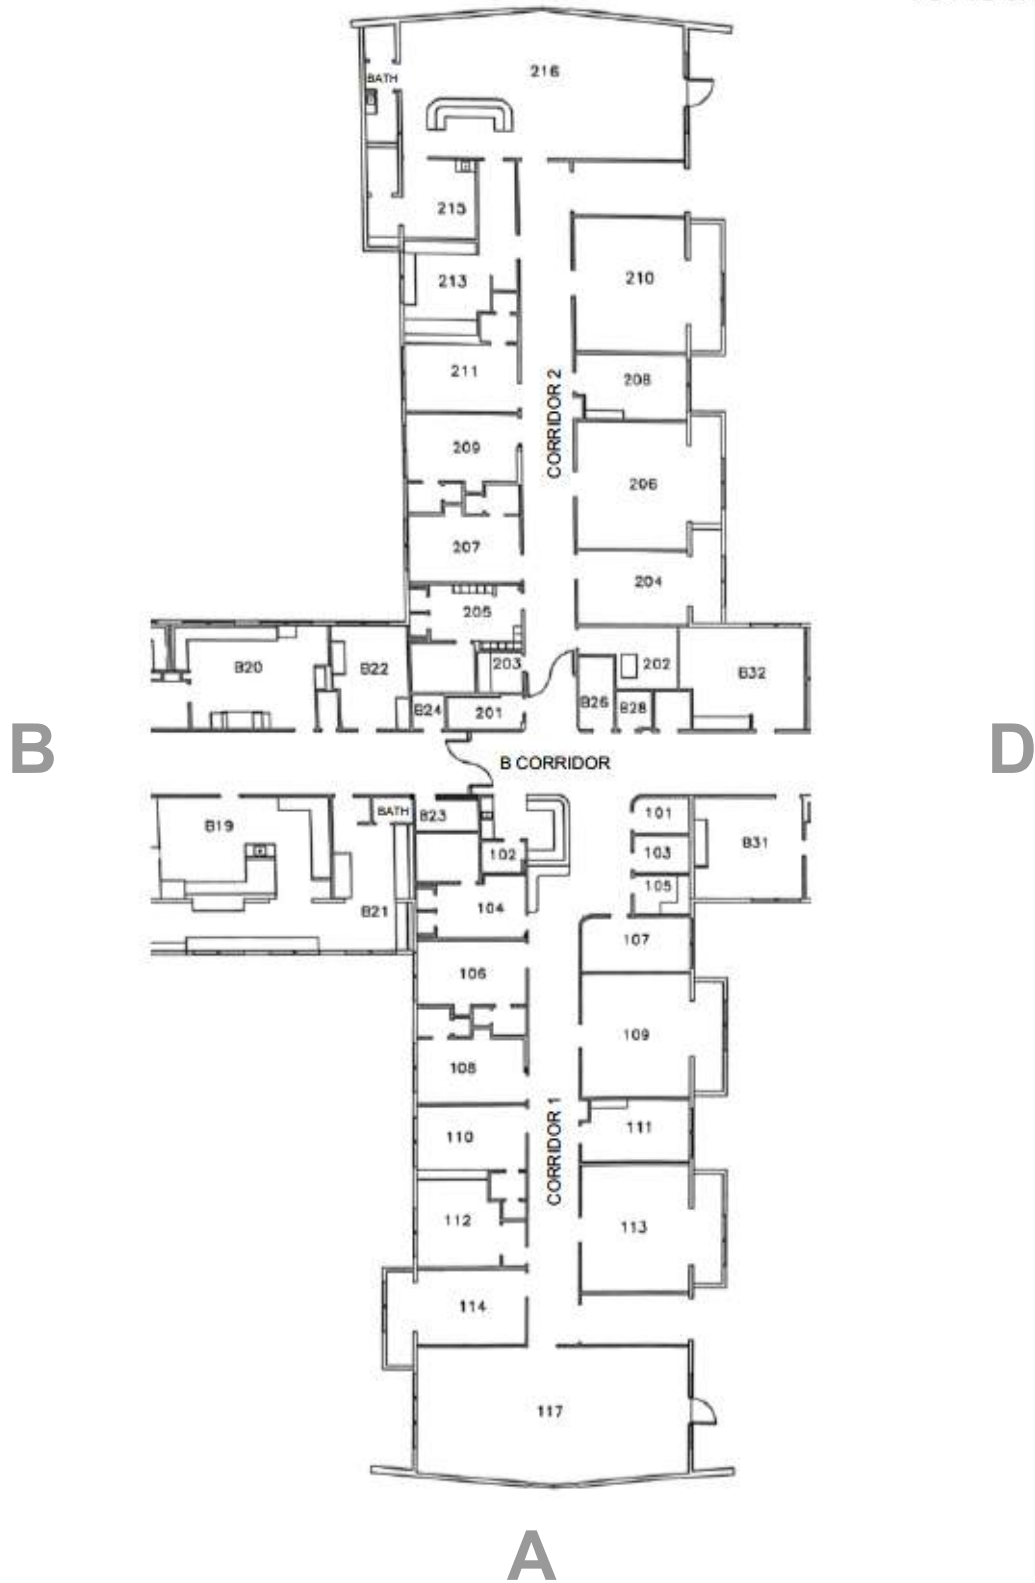



Main Hospital, 1st Floor

Site Drawing - Lead - Page 4 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536


Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**

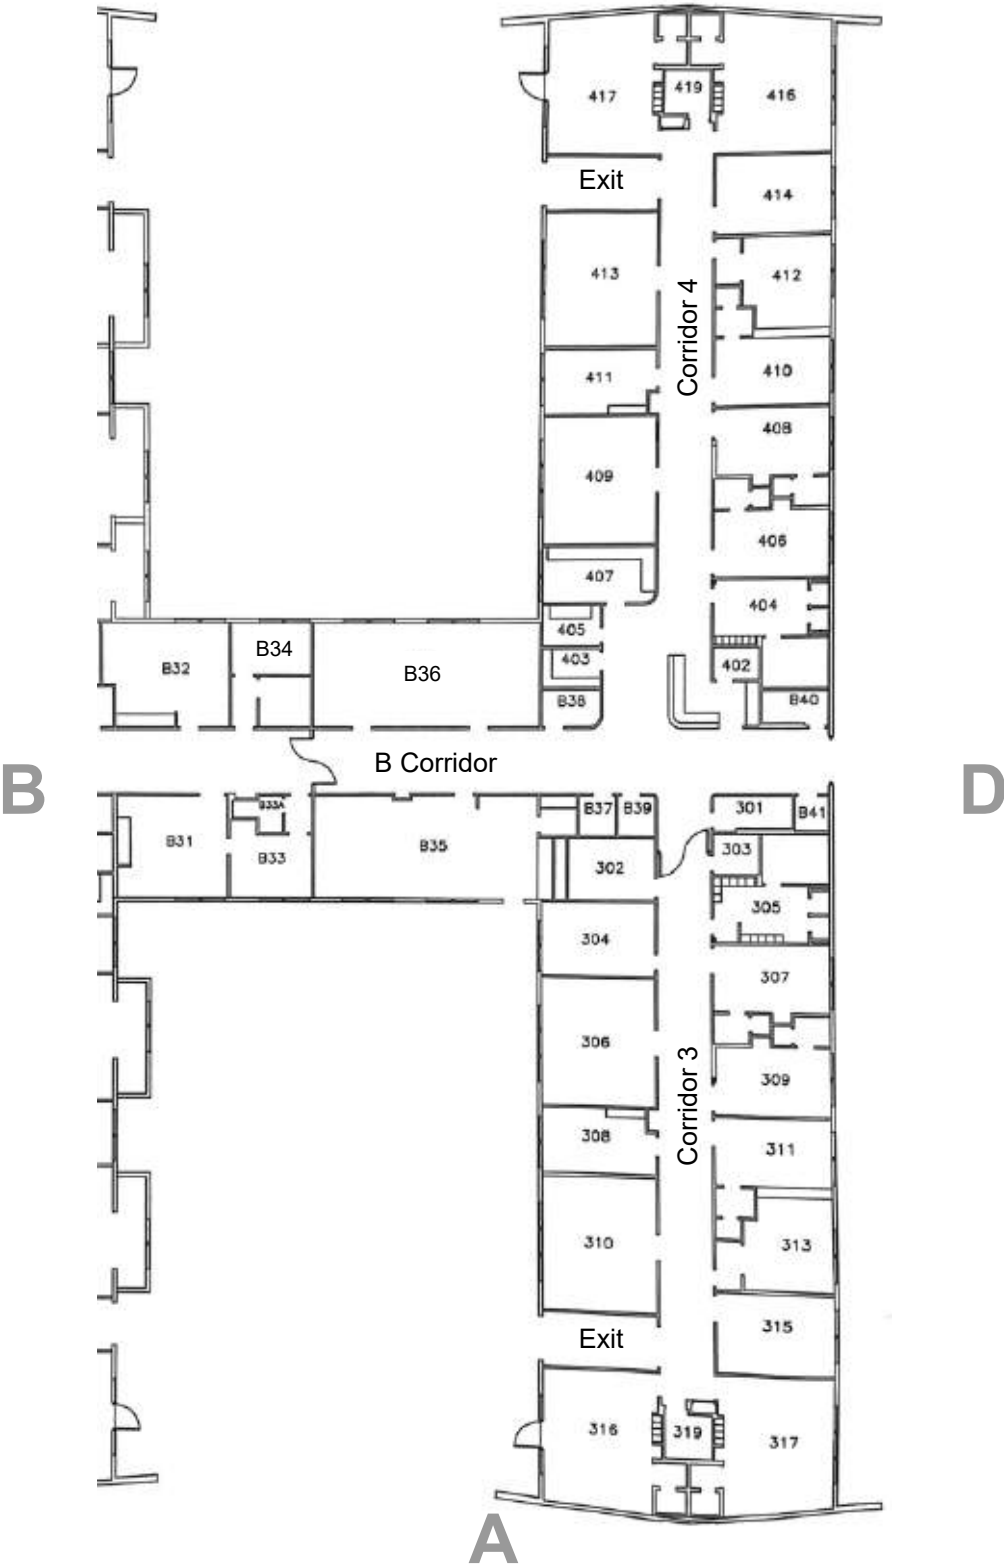

Main Hospital, 1st Floor


Site Drawing - Lead - Page 5 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



Not to Scale



A-Tech Consulting, Inc.

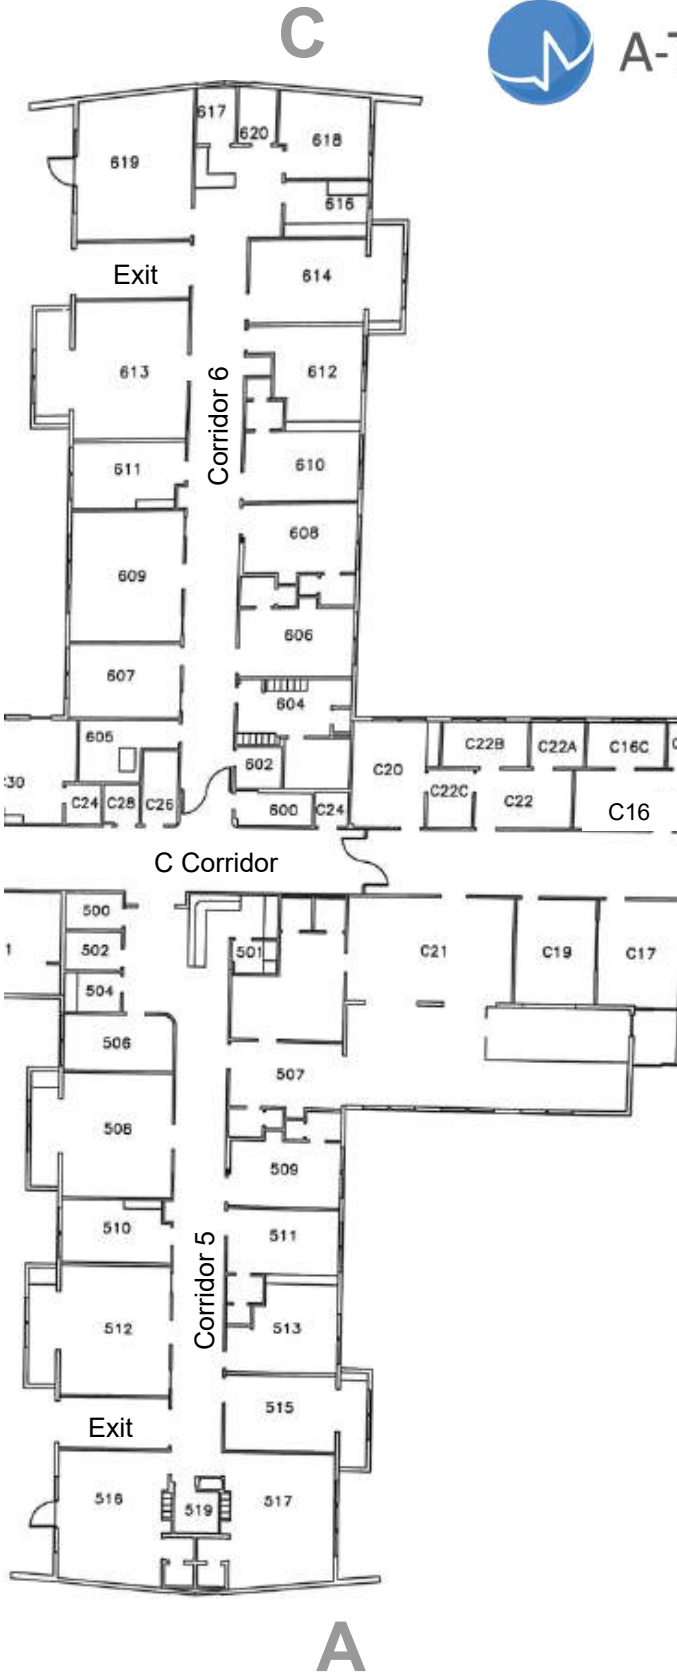


Main Hospital, 1st Floor

Site Drawing - Lead - Page 6 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061


**County of Los Angeles,
Department of Public Works**



C





A-Tech Consulting, Inc.

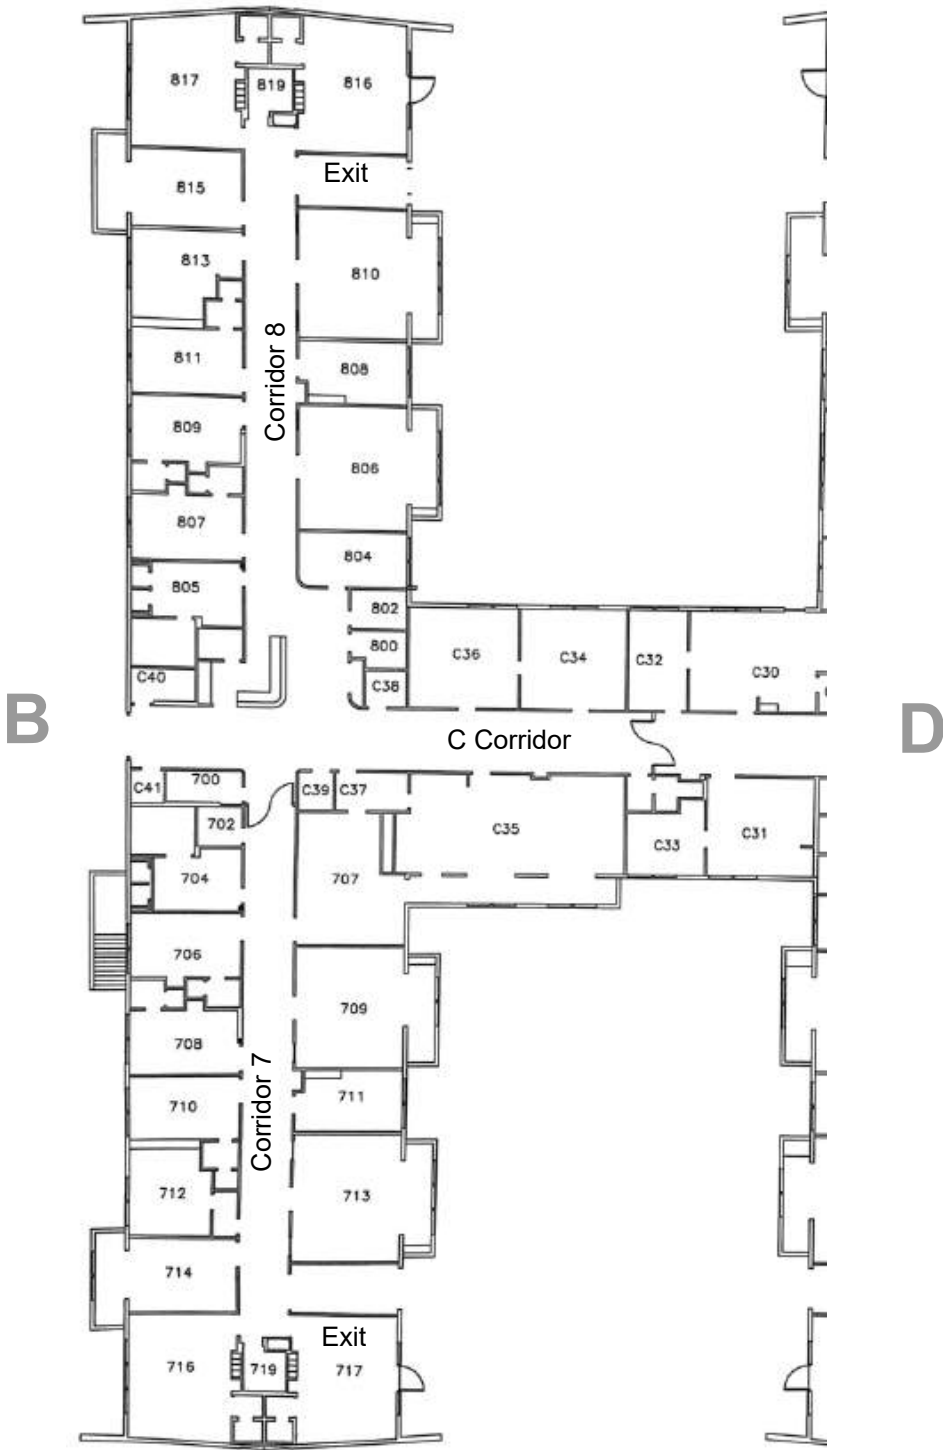



Main Hospital, 1st Floor

Site Drawing - Lead - Page 7 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

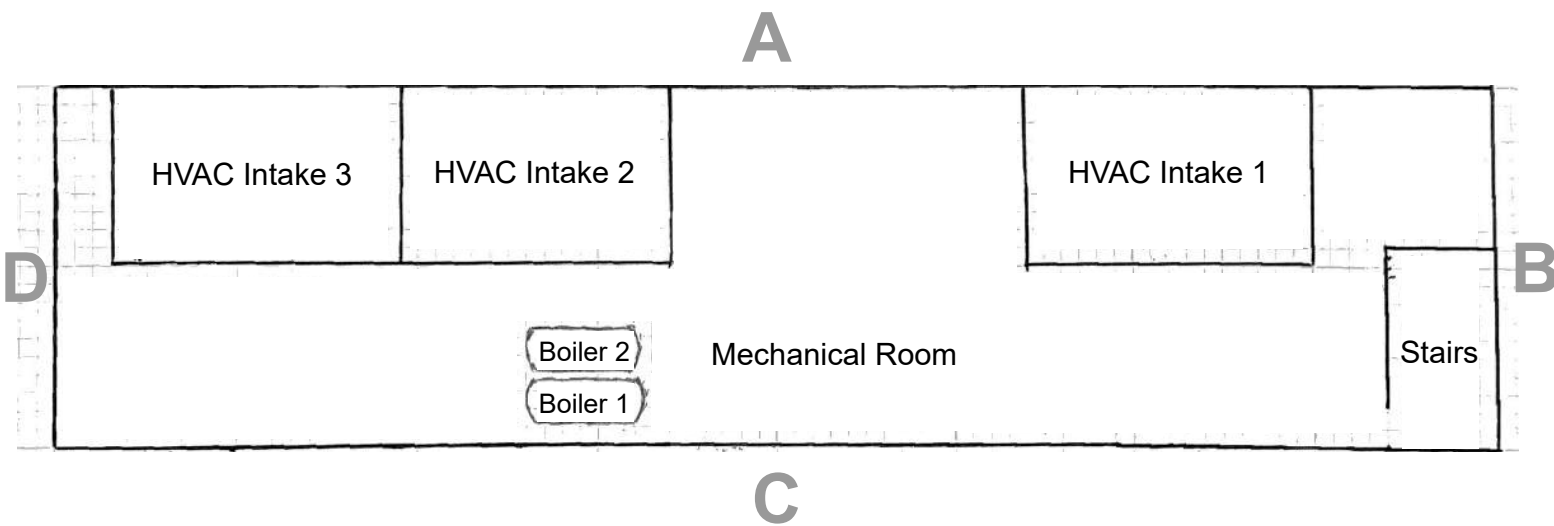


Main Hospital, 2nd Floor, Mechanical Room

Site Drawing - Lead - Page 8 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

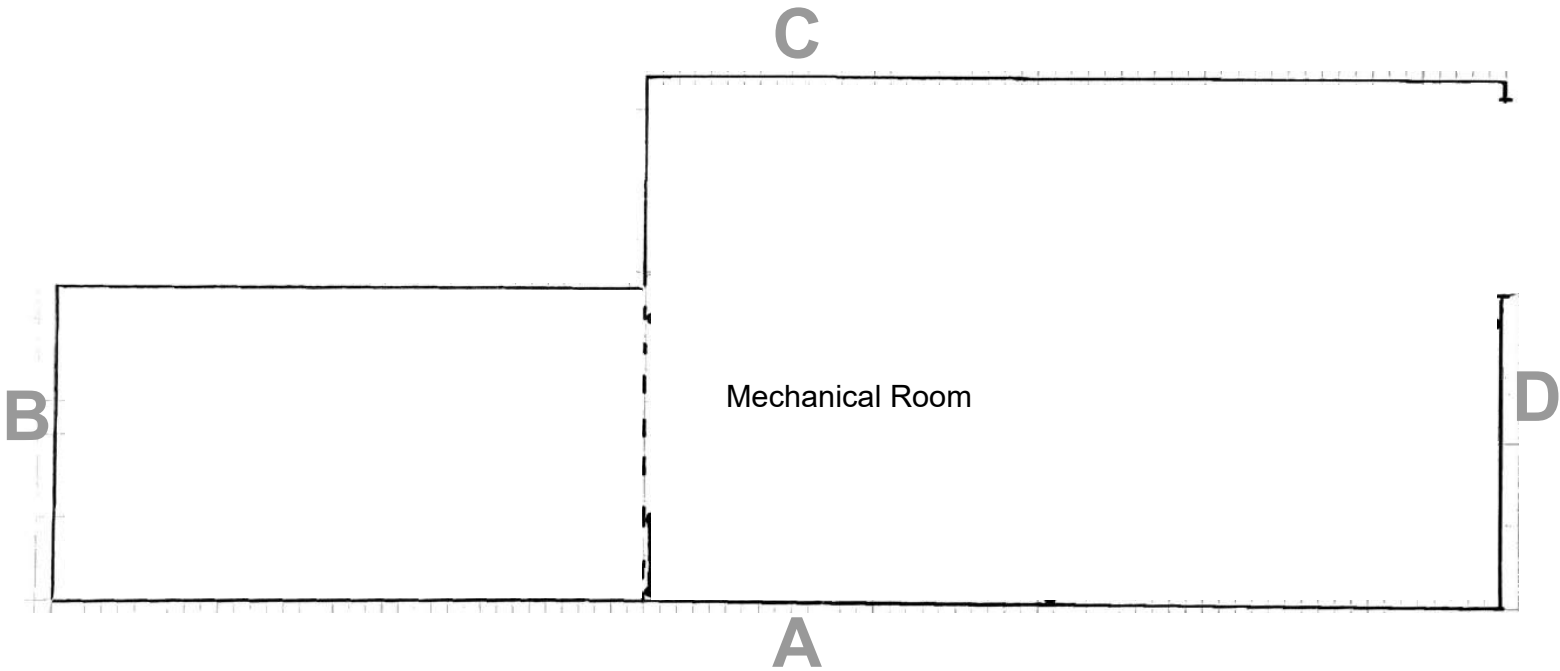

Main Hospital, 1st Floor, Mechanical Room


Site Drawing - Lead - Page 9 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



Not to Scale



A-Tech Consulting, Inc.

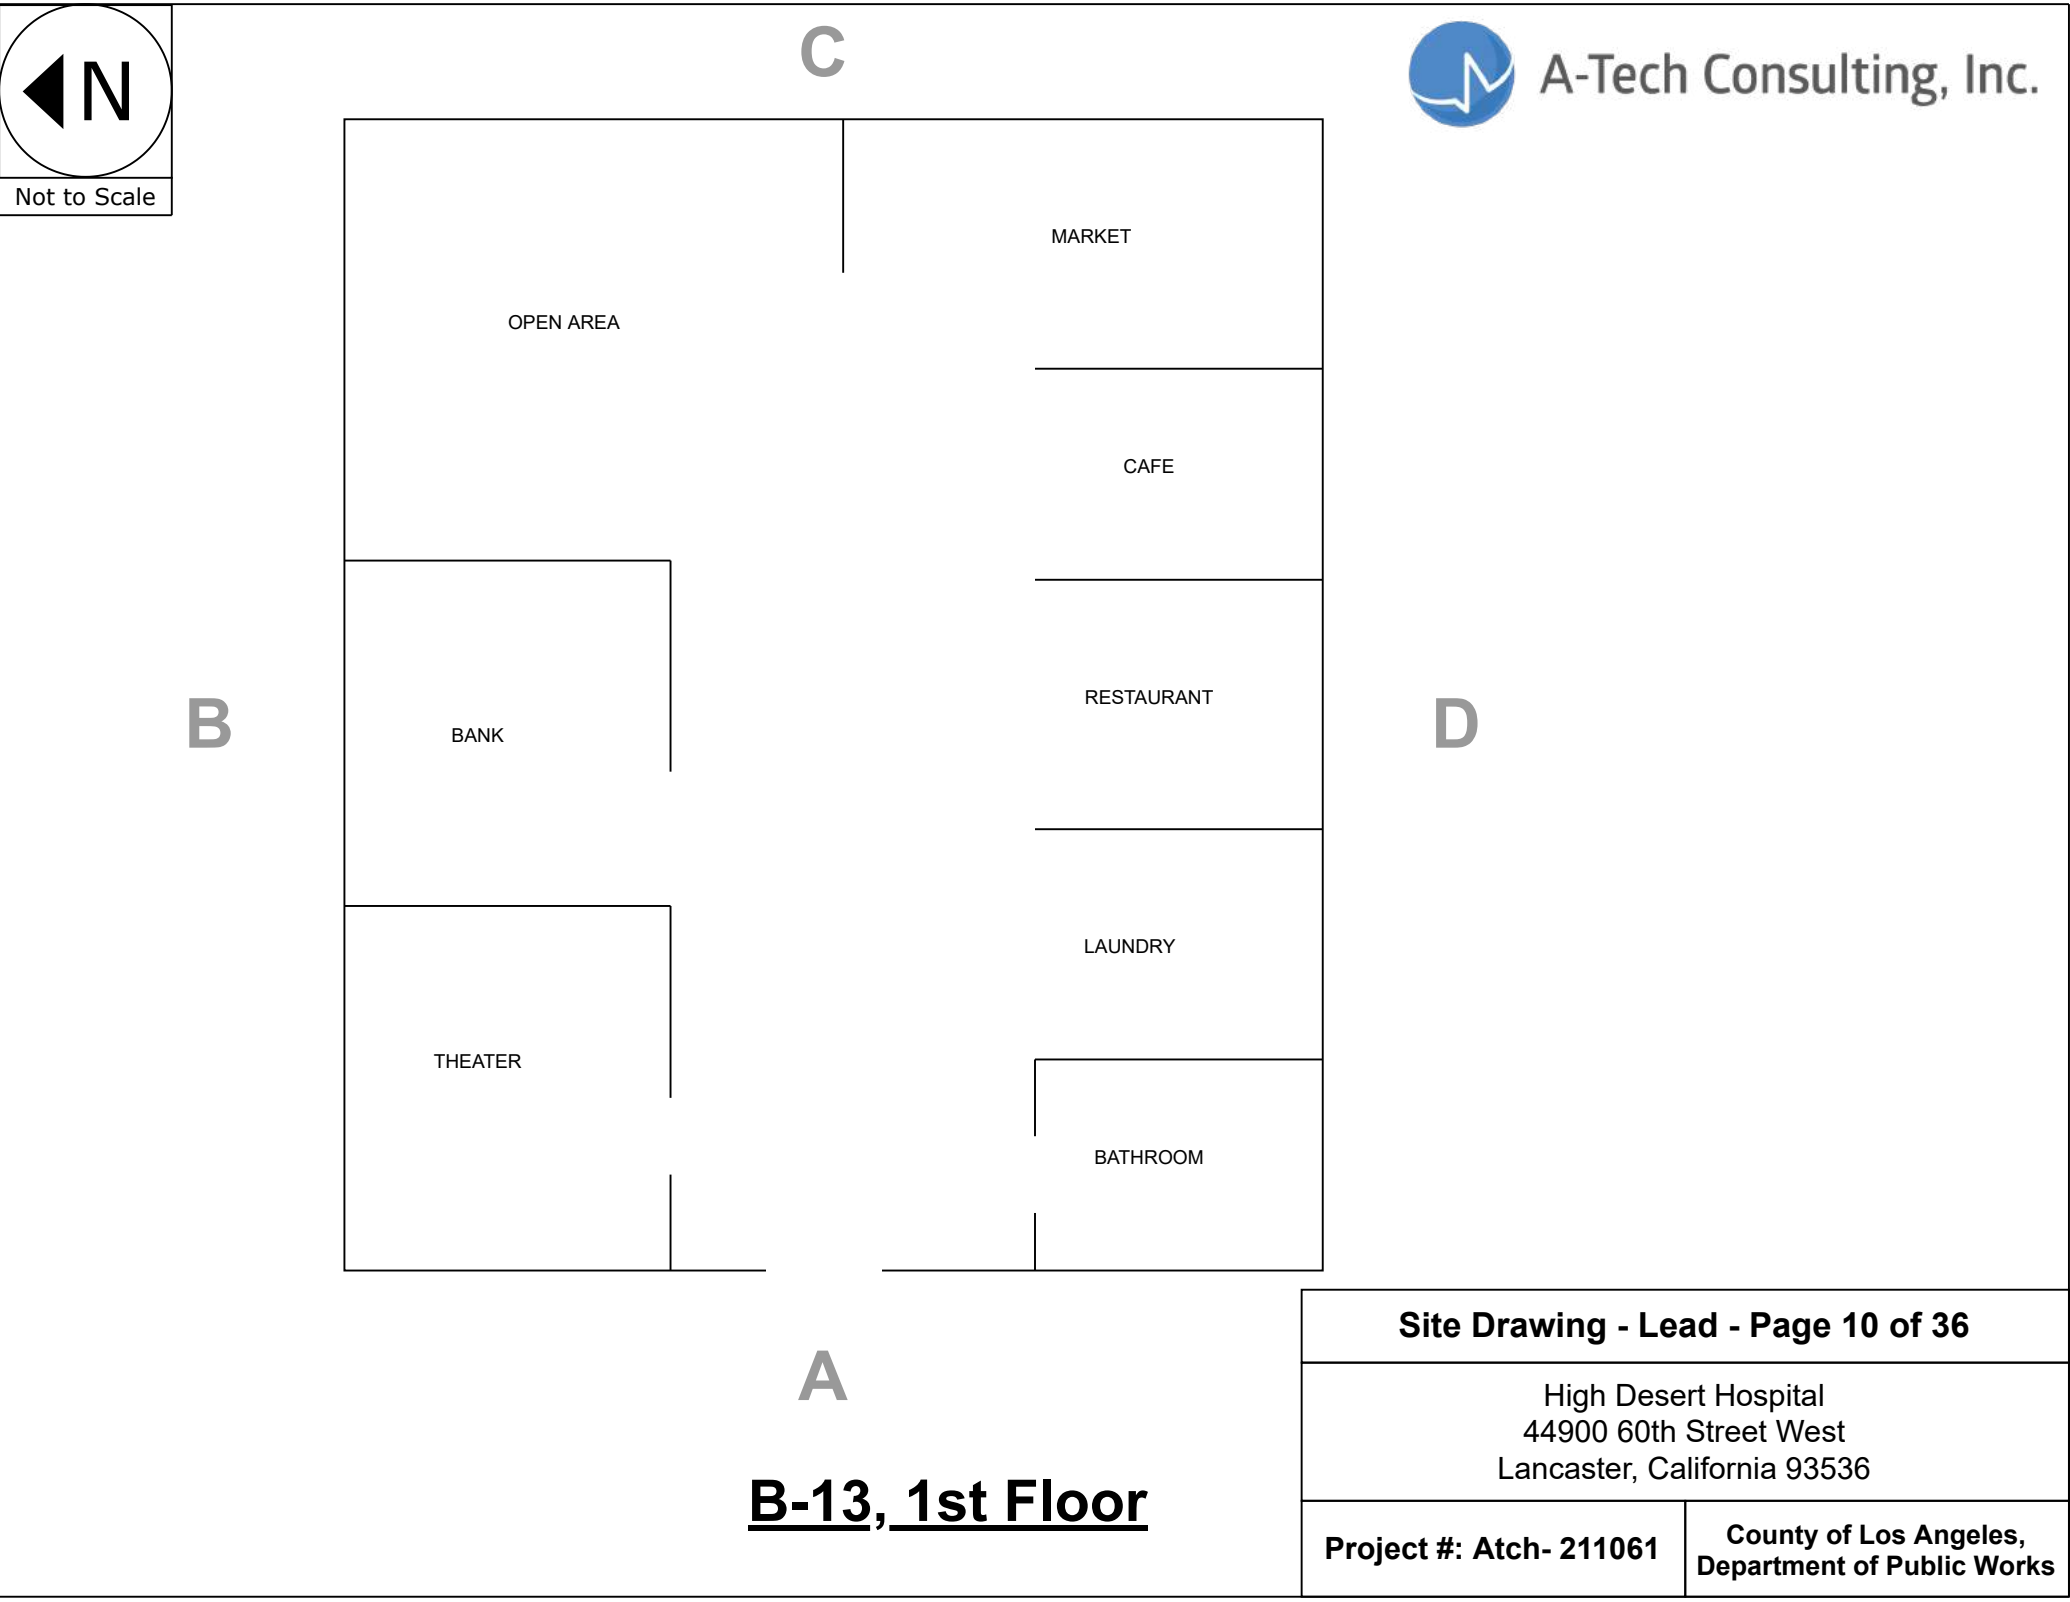


B-13, 1st Floor

Site Drawing - Lead - Page 10 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**




Not to Scale

C



A-Tech Consulting, Inc.

B



Roof

D

A


B-13, Exterior and Roof

Site Drawing - Lead - Page 11 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works



C

B

BATH

STORAGE

OPEN AREA

D

CLOSET

A


B-12, 1st Floor

Site Drawing - Lead - Page 12 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**



Not to Scale




B

C

D

A

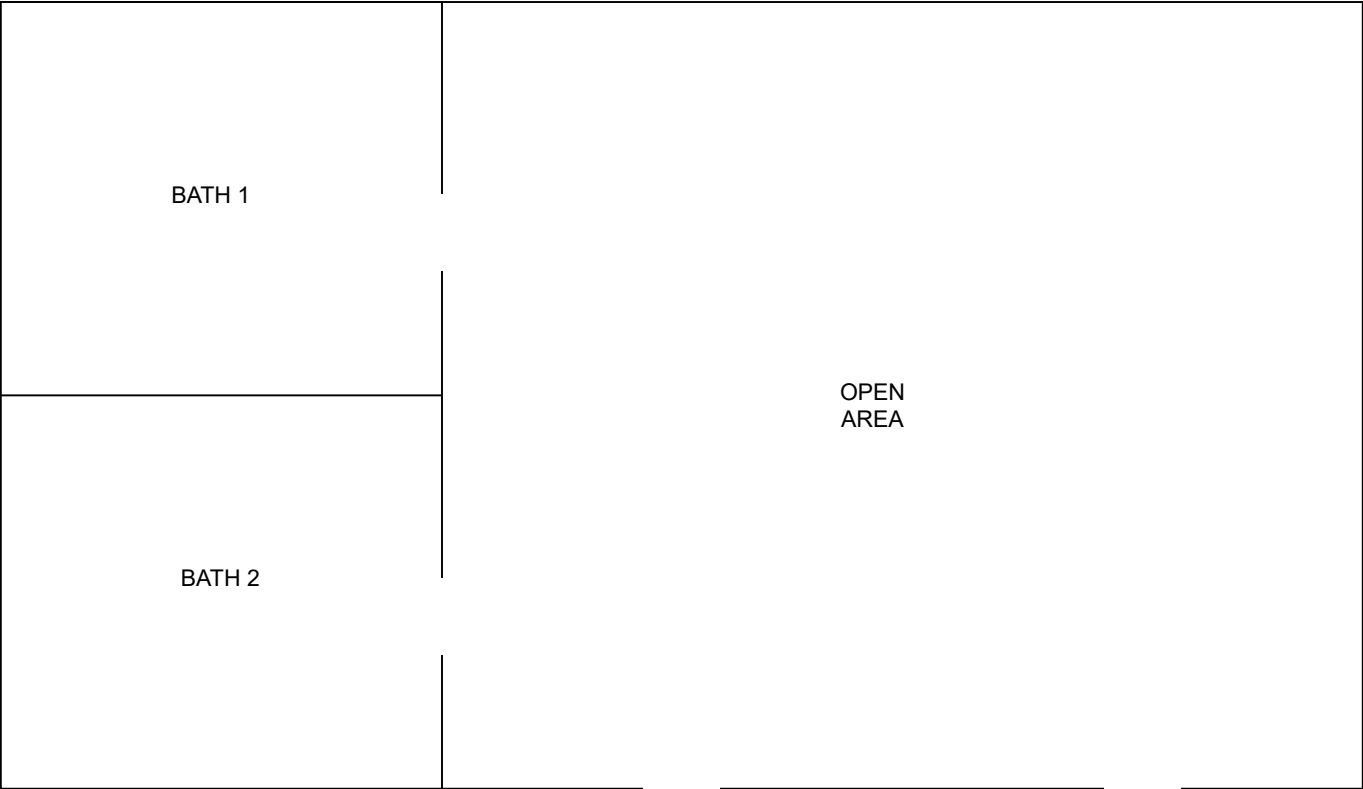


B-10, 1st Floor

Site Drawing - Lead - Page 13 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works



C

B

D

Roof

A



B-10, Exterior and Roof

Site Drawing - Lead - Page 14 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536


Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**

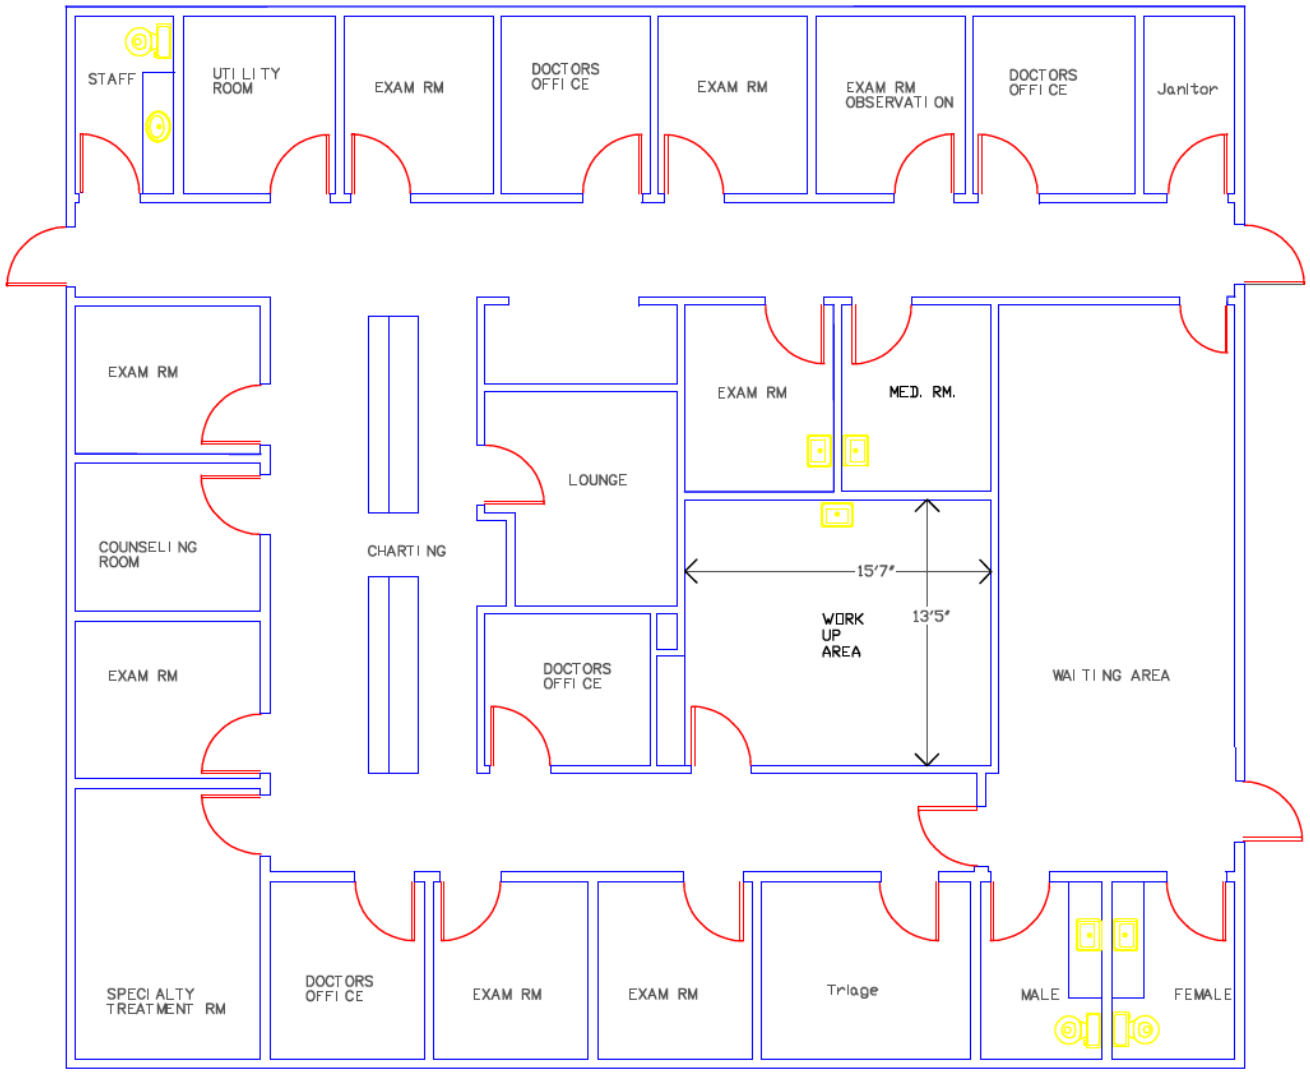

B-02, 1st Floor

Site Drawing - Lead - Page 15 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



Not to Scale



D

C

A

Roof

B



B-02, Exterior and Roof

Site Drawing - Lead - Page 16 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

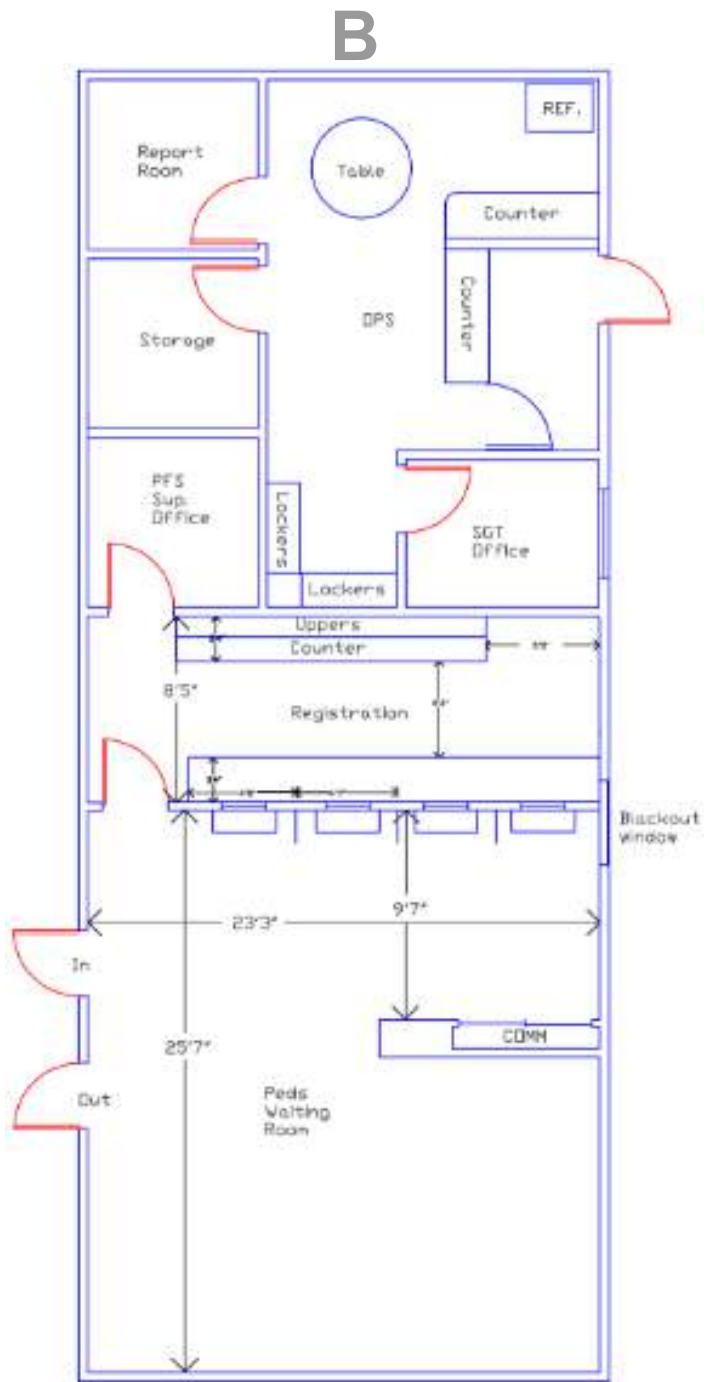



B-03, 1st Floor

Site Drawing - Lead - Page 17 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536


Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**



B-03, Exterior and Roof

Site Drawing - Lead - Page 18 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works




B-05, 1st Floor

Site Drawing - Lead - Page 19 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

N▶

Not to Scale





B-05, Exterior and Roof

Site Drawing - Lead - Page 20 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

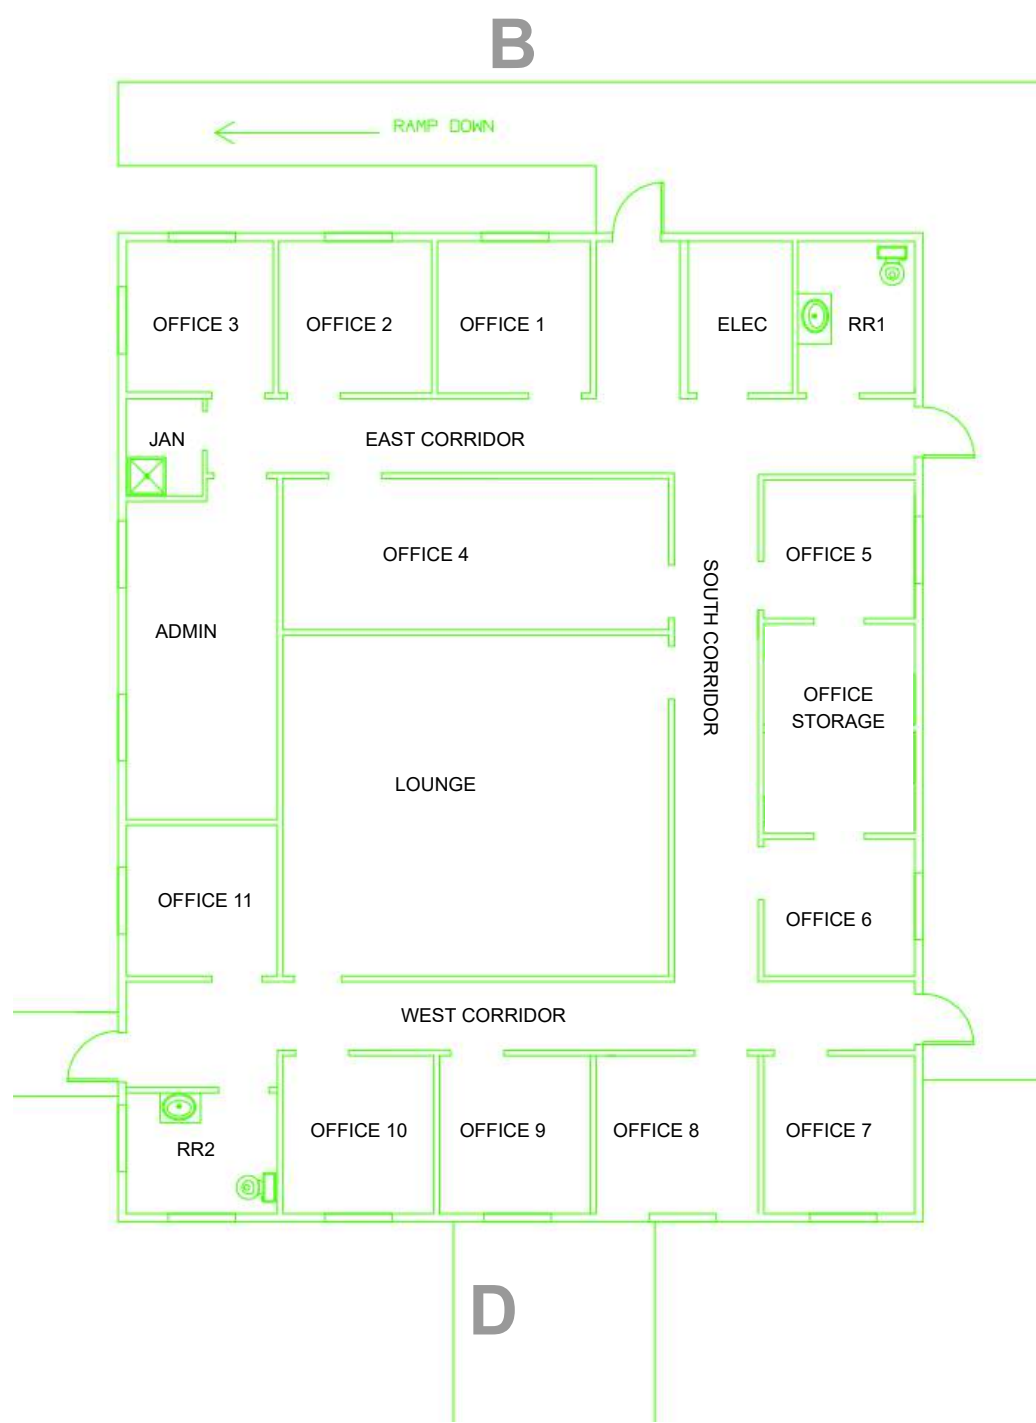


B-08, 1st Floor

Site Drawing - Lead - Page 21 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

◀N

Not to Scale



Roof

B-08, Exterior and Rood

Site Drawing - Lead - Page 22 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

N▶

Not to Scale



D

B-07, 1st Floor

Site Drawing - Lead - Page 23 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



B



A-Tech Consulting, Inc.

A

Roof

C

D


B-07, Exterior and Roof

Site Drawing - Lead - Page 24 of 36


High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works



A

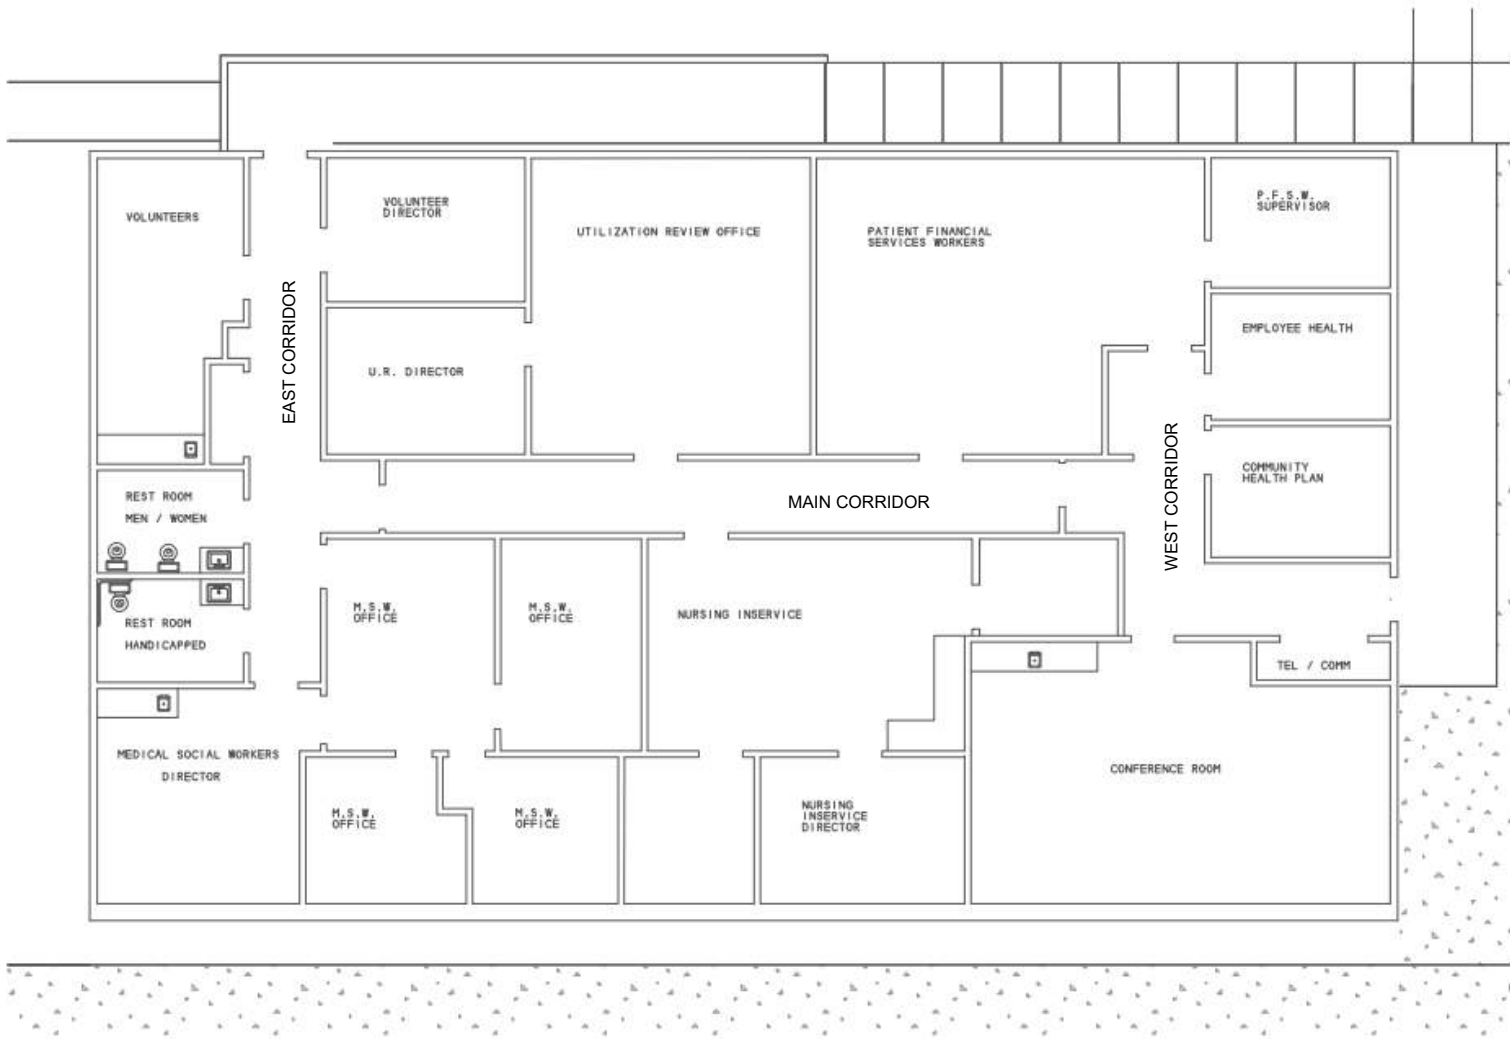


Site Drawing - Lead - Page 25 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

B-01, 1st Floor



A

D

Roof

B

C


B-01, Exterior and Roof

Site Drawing - Lead - Page 26 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061


County of Los Angeles,
Department of Public Works



C URGENT CARE / SPECIALTY CLINIC



A-Tech Consulting, Inc.

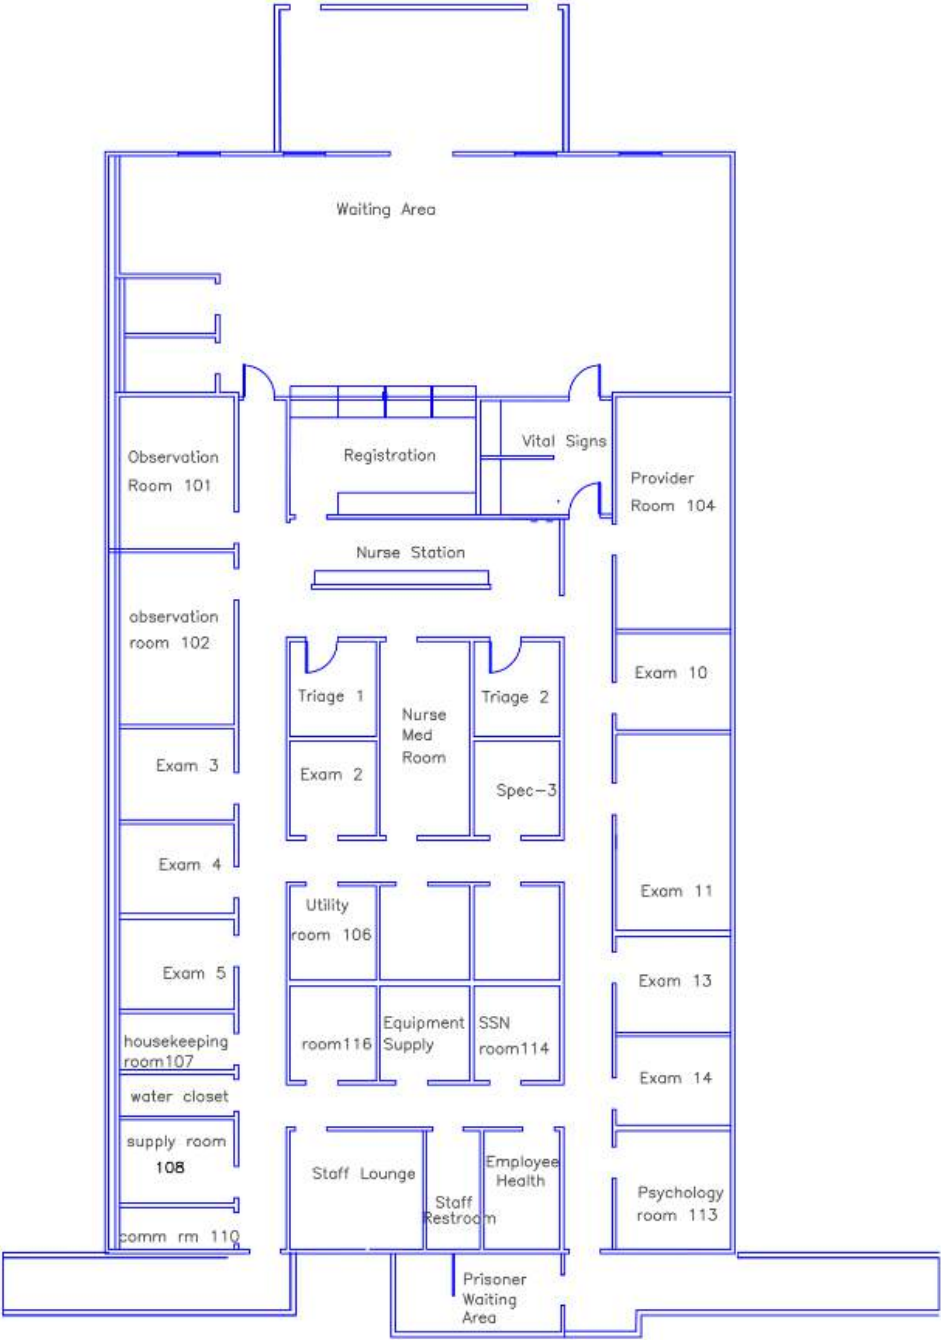



A **B-04, 1st Floor**

Site Drawing - Lead - Page 27 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

County of Los Angeles,
Department of Public Works




B-04, Exterior and Roof

Site Drawing - Asbestos - Page 28 of 36


High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**



Not to Scale

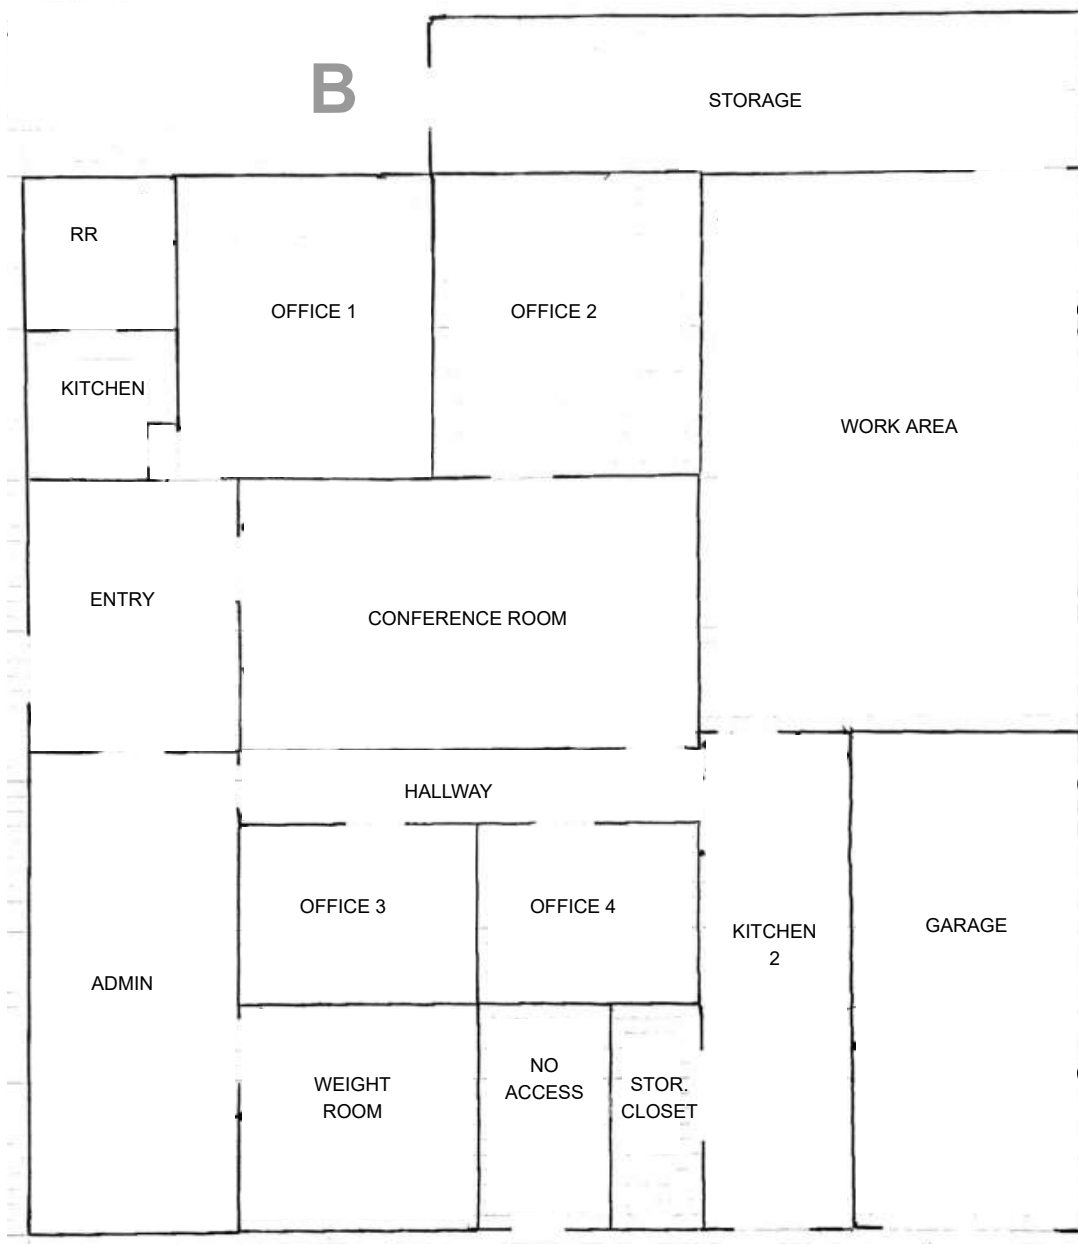

D

B-11, 1st Floor

Site Drawing - Lead - Page 29 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



B

A

C

Roof

D


B-11, Exterior and Roof

Site Drawing - Lead - Page 30 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061


**County of Los Angeles,
Department of Public Works**



Not to Scale



A-Tech Consulting, Inc.

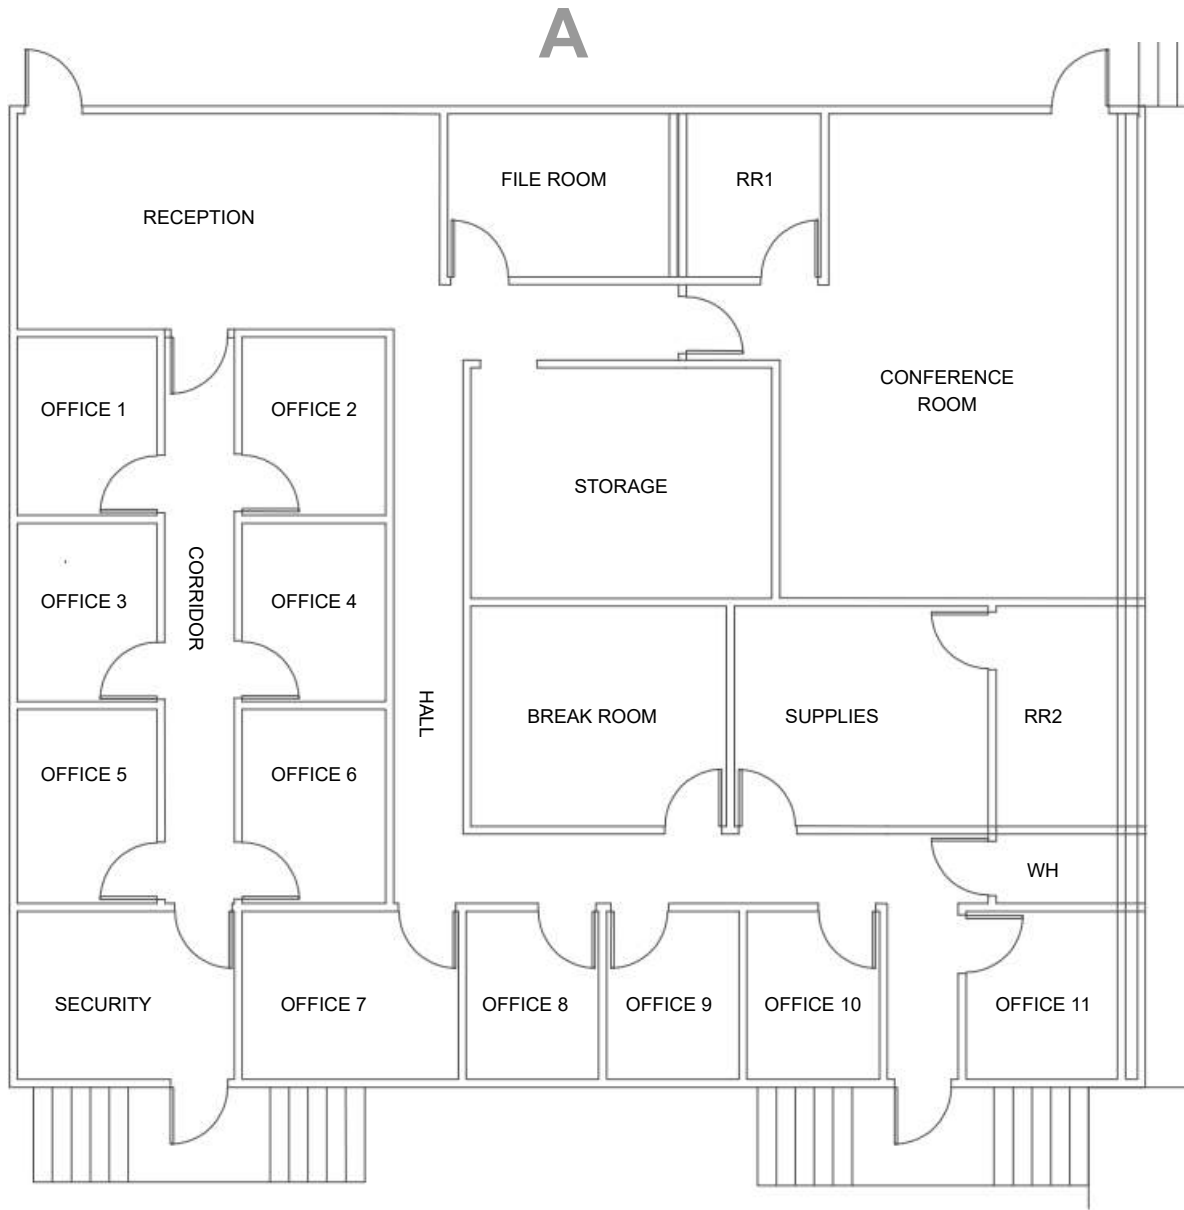

C


B-06, 1st Floor

Site Drawing - Lead - Page 31 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536

Project #: Atch- 211061

**County of Los Angeles,
Department of Public Works**



A

B

Roof

D

C



B-06, Exterior and Roof

Site Drawing - Lead - Page 32 of 36

High Desert Hospital
44900 60th Street West
Lancaster, California 93536



Project #: Atch- 211061

County of Los Angeles,
Department of Public Works

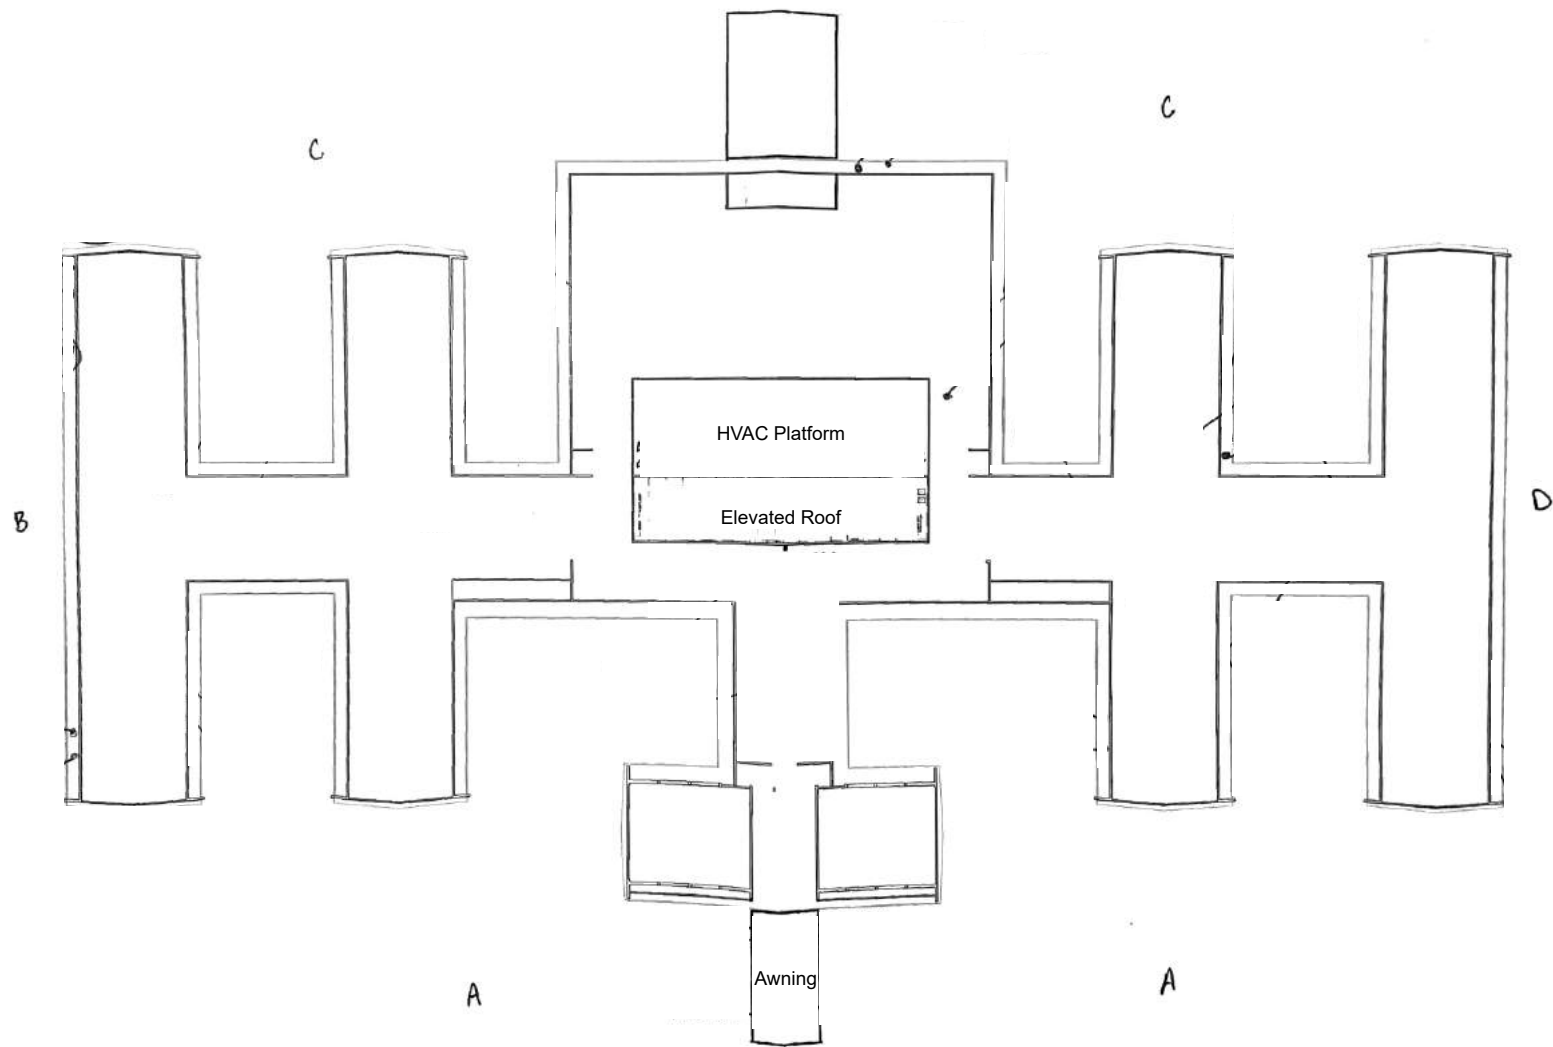



Main Hospital, Roof

Site Drawing - Lead - Page 33 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

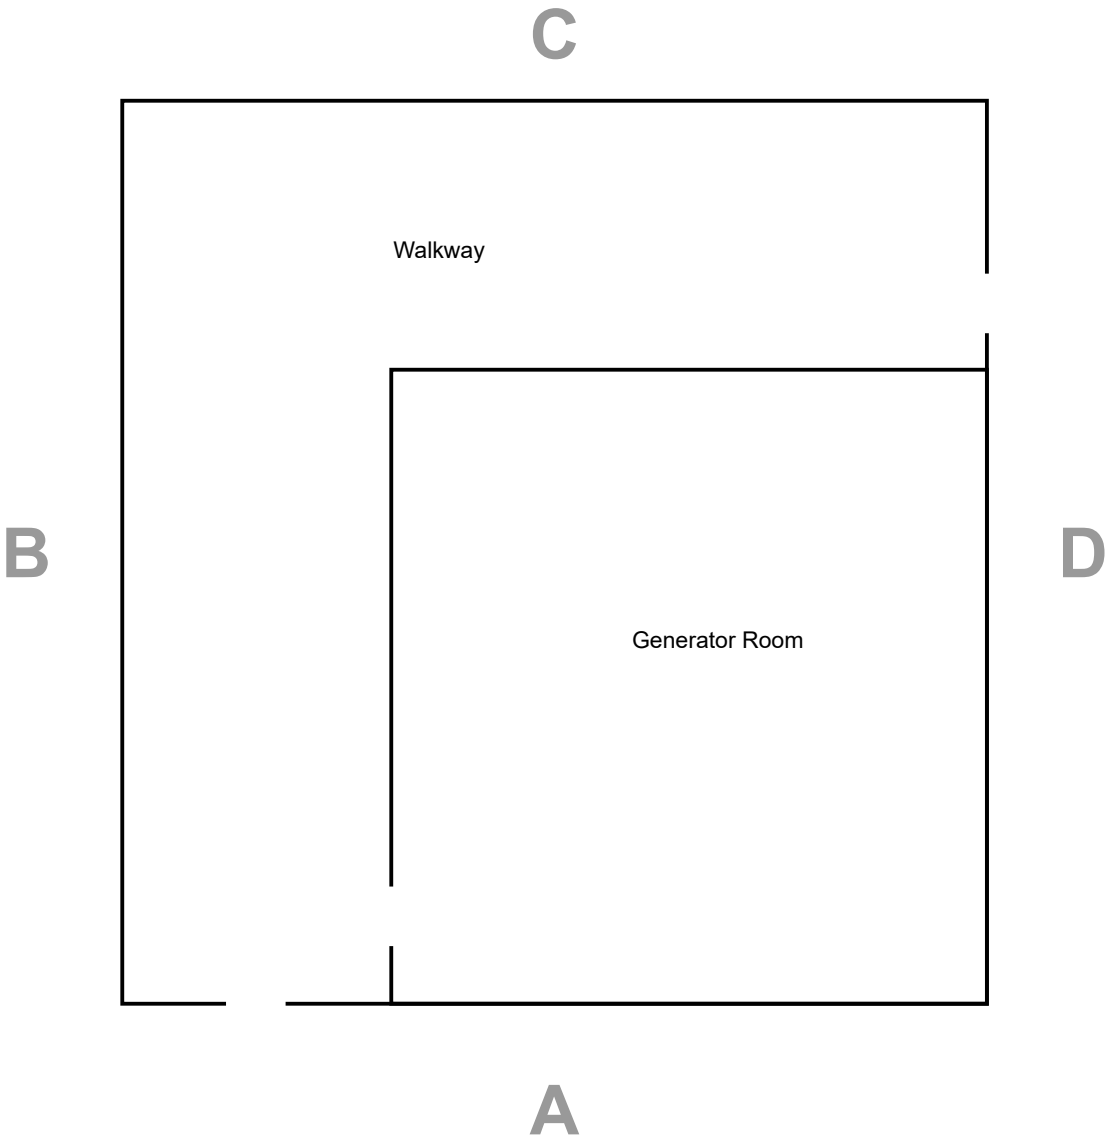



Emergency Power Building, 1st Floor

Site Drawing - Lead - Page 34 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

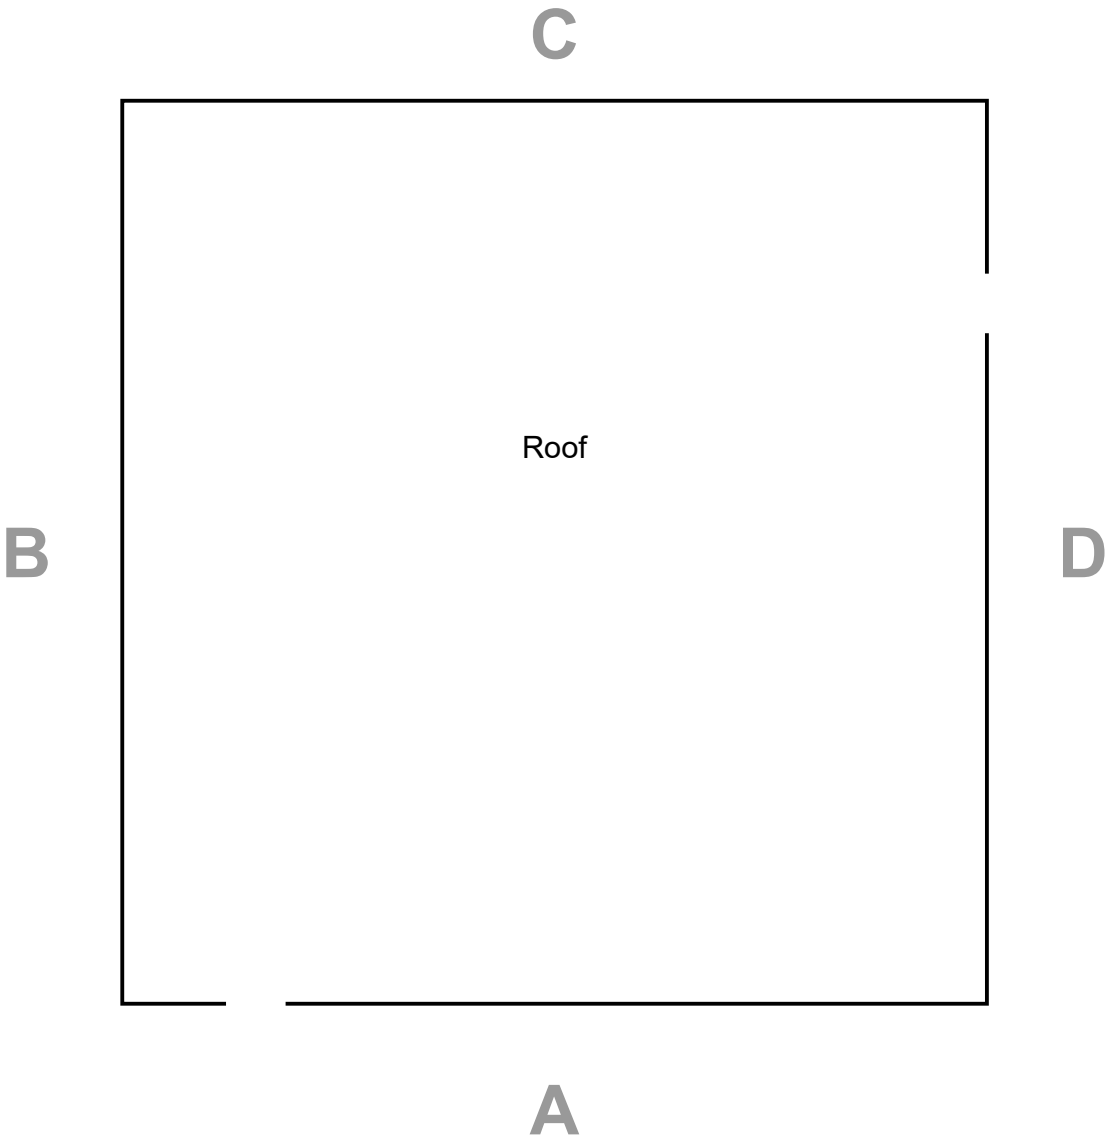

**Emergency Power Building, Exterior
and Roof**

Site Drawing - Lead - Page 35 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works

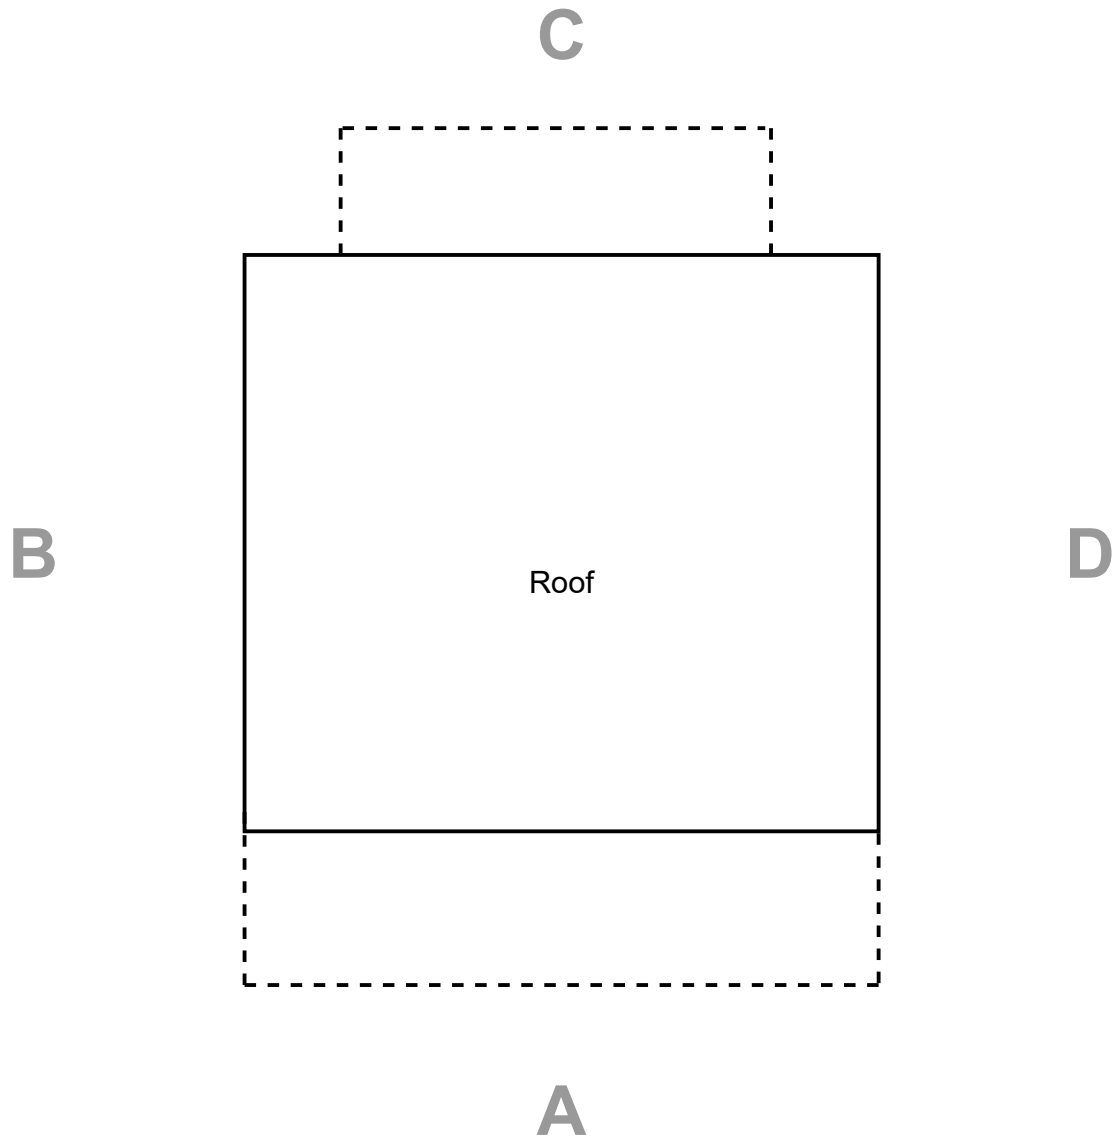

**Hazardous Waste Building, Exterior
and Roof**

Site Drawing - Lead - Page 36 of 36	
High Desert Hospital 44900 60th Street West Lancaster, California 93536	
Project #: Atch- 211061	County of Los Angeles, Department of Public Works



Digital Photographs - Lead

Locations: High Desert Hospital, 44900 60th Street West
Area: Various Buildings, Interior and Exterior

Client Name: County of Los Angeles, Department of Public Works



View of White Porcelain Toilet



View of White Porcelain Toilet




View of 4" x 4" Tan with Brown Spots Ceramic Wall Tile



View of White Porcelain Floor Sink



View of White Porcelain Floor Sink

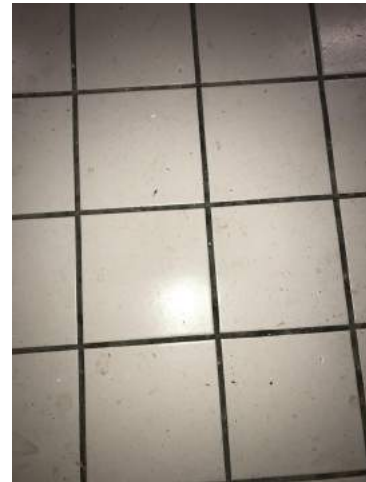

View of 6" x 6" White Ceramic Floor Tile



View of 4" x 6" Gray/Blue Ceramic Wall Tile



View of Yellow Metal Hand Rail



View of Light Blue Metal Hand Rail



View of Light Blue Metal Partition



View of 4" x 6" Light Green Ceramic Wall Tile



View of White Porcelain Bathtub



View of Red Metal Hydraulic Lift



View of 4" x 6" Beige Ceramic Wall Tile



View of 4" x 4" Tan with Brown Spots Ceramic Wall Tile



View of Light Blue Metal Post



View of 6" x 6" Light Green Ceramic Wall Tile



View of Yellow Concrete Stair



View of White Porcelain Sink



View of Light Blue Metal Overhang



View of 6" x 6" Gray/Blue Ceramic Cove Base Tile



View of Black Metal Plaque



View of Light Blue Stucco Wall



View of White Porcelain Toilet



View of Yellow Metal Hand Rail



View of White Plaster Wall



View of White Porcelain Urinal



View of White Porcelain Sink



View of White Porcelain Sink



View of 4" x 4" Brown Ceramic Wall Tile

LEAD HAZARD EVALUATION REPORT

Section 1 — Date of Lead Hazard Evaluation 4/5/21-4/29/2021

Section 2 — Type of Lead Hazard Evaluation (Check one box only)
☒ Lead Inspection ☐ Risk assessment ☐ Clearance Inspection ☐ Other (specify) _____

Section 3 — Structure Where Lead Hazard Evaluation Was Conducted

Address [number, street, apartment (if applicable)]		City	County	Zip Code
44900 60th Street West		Lancaster	Los Angeles	93536
Construction date (year) of structure	Type of structure		Children living in structure?	
Unknown	☐ Multi-unit building ☐ School or daycare ☐ Single family dwelling ☒ Other <u>Hospital buildings</u>		☐ Yes ☐ No ☒ Don't Know	

Section 4 — Owner of Structure (if business/agency, list contact person)

Name		Telephone number	
Unknown			
Address [number, street, apartment (if applicable)]	City	State	Zip Code

Section 5 — Results of Lead Hazard Evaluation (check all that apply)
☐ No lead-based paint detected ☒ Intact lead-based paint detected ☐ Deteriorated lead-based paint detected
☒ No lead hazards detected ☐ Lead-contaminated dust found ☐ Lead-contaminated soil found ☐ Other _____

Section 6 — Individual Conducting Lead Hazard Evaluation

Name		Telephone number	
Robert L. Williams		(714) 434-6360	
Address [number, street, apartment (if applicable)]	City	State	Zip Code
1640 North Batavia Street	Orange	California	92867
CDPH certification number	Signature		Date
LRC-00004572			6/23/2021

Name and CDPH certification number of any other individuals conducting sampling or testing (if applicable)

Adrian Urbina LRC-00006711

Section 7 — Attachments

- A. A foundation diagram or sketch of the structure indicating the specific locations of each lead hazard or presence of lead-based paint;
- B. Each testing method, device, and sampling procedure used;
- C. All data collected, including quality control data, laboratory results, including laboratory name, address, and phone number.

First copy and attachments retained by inspector

Second copy and attachments retained by owner

Third copy only (no attachments) mailed or faxed to:

 California Department of Public Health
 Childhood Lead Poisoning Prevention Branch Reports
 850 Marina Bay Parkway, Building P, Third Floor
 Richmond, CA 94804-6403
 Fax: (510) 620-5656