ASPLUNDH CONSTRUCTION CORP.

SOUTHERN CALIFORNIA EDISON
An EDISON INTERNATIONAL Company

DETERIORATED POLE REPLACEMENT

END POINT TESTING

To schedule End Point Testing (EPT), call the EPT Hotline at (714) 285-4325, 7:00 AM to 4:00 PM, Mon. – Fri. If the test needs to be performed after hours, please state the day and approximate timeframe.

D17 Rev: 12/01/09

CIRCUIT (S):
CALGROVE 16KV o/o NEWHALL SUB

STA'S 1-2

ADDRESS:
LOCATION: THE OLD RD N/S 375' W/O WELDON CYN RD
CITY: NEWHALL
*** NOTES:** BULLETIN 322 AREA
DEAD END LINE DIRECTLY TO SWITCH
BURIED FIBER OPTIC CABLE - CALL BEFORE DIG
AT&T - 1-800-642-2444

1 RM 1248725E
55' Class C3
RM: 1- POLE 55' CLASS 3 WOOD FULL TREAT
RM: 1- XA DBLE VB 10' STEEL PINS
RM: 6- INS POLY SUSP 16KV CLMP NO L-GUARD 336
RM: 1- SEC ROLLER (166-CLEVIS & SPOOL)
RM: 1- GR OH #6 SOL WP PRIMARY W/ROD

SET 1' WEST
POLE 1248725E 2
55' Class H5
IN: 1- POLE 55' CLASS H5 WOOD FULL TREAT
IN: 6- INS POLY SUSP 16KV CLMP NO L-GUARD 336
IN: 2- SEC ROLLER (166-CLEVIS & SPOOL)
IN: 1- GR OH #6 SOL WP PRIMARY W/ROD

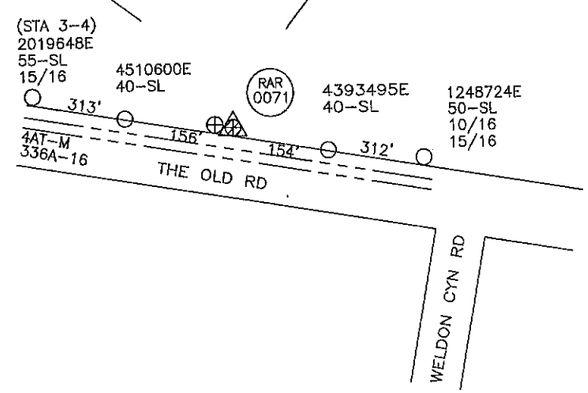

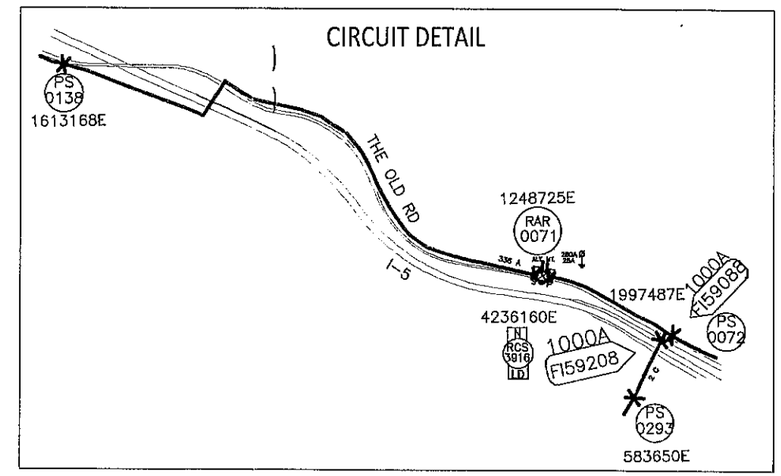

TRANSFER (S):
3/C 336A-16KV
1-4AT-M
2-COMM
1-600A 17KV HORIZ OMNI-RUPTER
SN:_____
1-16KV VIPER-S AUTOMATIC RECLOSER(RAR 0071)
SN:_____
6-AR DISCONNECT W/ MOV S.A.
1-CONTROL POWER TRANSFORMER
1-AR CONTROL CABINET
1-250W SL

NOT TO SCALE

PERMIT REQ'D.	
CALTRANS:	
ENCROACHMENT:	
RAILROAD:	
HELICOPTER:	
OTHER:	

SPEED LIMIT 55

PEDESTRIAN TRAFFIC CONTROL REQUIRED
☐ YES ☒ NO

GPS: LAT: N 34° 20' 31.28"
LONG: W 118° 31' 26.14"

TLM DATA:

	SIZE	KVA	CUST.	% LOAD
EXIST				
PROP.				

VOLTAGE DROP _____ %
PRI. CIRC. _____

NOTES	
JOINT POLE:	X
RENTER:	
MITC FUME:	
JOINT MEET:	
TRUCK ACCESS:	X
HAND SET:	
CONTACT CATV:	
ENVIRONMENTAL:	
REAL PROP. REVIEW:	
PAVEMENT REPAIR:	
☐ CONCRETE / ☐ ASPHALT	X

DISTRICT 59 – VALENCIA	PROJ. MGR. RODRIGUEZ, JOHN T. PHONE 909-469-0219		PLANNER SNYDER, COLLIN PHONE 714-893-2405		
FOREMAN	TRUCK NO.	P/E	INVENTORY MAP NO. 99-57	THOMAS GUIDE LA 4641-A6	GRID NO.
DESIGN NO. 597335_0.01					
CSD 140 Y ___ N ___	BY-PASS CODE	EXISTING ___ CHANGE TO ___	TLM CHECKED ___ %LOAD	JPA NO. 4010453414	ASSOCIATED DESIGN NO.
PRODUCT/SAP NO. TD856716			PRODUCT/SAP NO.		PRODUCT/SAP NO.

TYPE	APPROVED BY	DATE	CHECKED BY	DRAWN BY	PAX #
				CS	

PROPOSED CONSTRUCTION (LOCATION)
DETERIORATED POLE REPLACEMENT
VARIOUS LOCATIONS
NEWHALL

SHEET ___ OF ___

JOB NO. 597335_0.01

Southern California Edison Company