
## PLACEMENT DATA

1 PL. 38' 1-4" C-PC PTS 77 OR EQUIV. PM 1 DU 38' R/C 4C





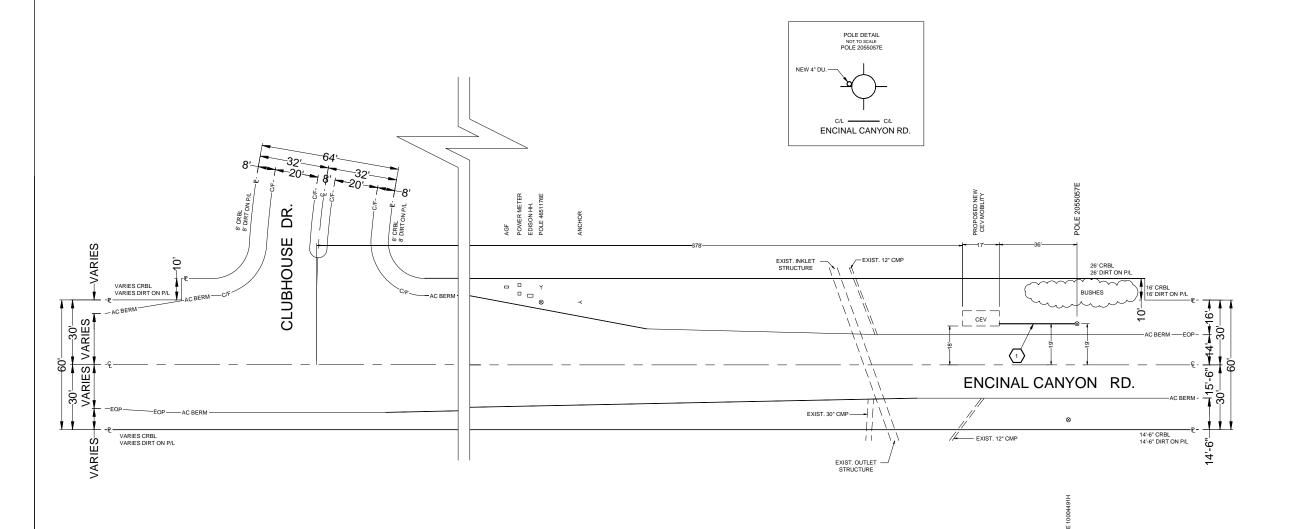

- CONSTRUCTION REQUIREMENTS

  1. MAINTAIN MINIMUM COVER OF 36' BELOW FLOW LINE.
  2. VERIFY EXISTING SUBSTRUCTURES PRIOR TO EXCAVATION.
  3. ALL 4" TO CONFORM TO PTS-77 OR EQUIVALENT.
  4. ALL 2" TO CONFORM TO PTS-66 OR EQUIVALENT.
  5. ALL BACKFILL TO BE SAND 12' BELOW AND 5" ABOVE.
  6. DO NOT BACKFILL OVER ANY TELEPHONE BURIED SPLICE LOCATIONS UNTIL. AUTHORIZED BY TELEPHONE COMPANY INSPECTOR.
  7. PLACE #6 TINNED GROUND WIRE AT BONDING POINTS. (SEE BONDING DETAIL)
  8. PLACE PULL ROPE IN NEW CONDUIT.
  9. DO NOT CUT CURB & GUTTER.
  10. ALL SURFACES AND LANDSCAPES WHICH HAVE BEEN REMOVED OR DAMAGED IN THE COURSE OF CONSTRUCTION SHALL BE RECONSTRUCTED OR REPLACE TO AT LEAST EQUAL OR BETTER THAN THE PREVIOUS OR ADJACENT SURFACE.
  11. ALL TRAFFIC CONTROL TO BE IN ACCORDANCE WITH THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCO) LATEST EDITION.
  12. PERA TATA GUIDELINES, ALL HANDHOLES, SPLICE BOXES, AND MANHOLES TO BE PURCHASED FROM EITHER NEWBASE OR UTILITY VAULT.

THIS PROJECT REQUIRES EXCAVATION. CONSTRUCTION WILL UTILIZE AND IMPLEMENT ALL BEST MANAGEMENT PRACTICES (BMP\*) AS REQUIRED TO ENSURE COMPLIANCE WITH A TAT POLICY LETTER ISSUED FEBRUARY 21, 2003 AND REVISED IN OCTOBER 2005 BY ENVIRONMENTAL MANAGEMENT CONCERNING STORM WATER PERMITTING AND STORM WATER POLUTION PREVENTION PLANS (SWPPP\*) AND IN ACCORDANCE WITH THE CLEAN WATER ACT (1972) AND EPA REQUIATIONS PUBLISHED IN 1990 AS MODIFIED BY THE PHASE II RULE IN 1999.

LOCATION: ENCINAL CANYON RD., N/S OF STREET, 431' E/O C/L OF CLUBHOUSE DR.

DESCRIPTION: PLACE 38' OF 1-4" DUCT FROM POLE 2055057E TO NEW MOBILITY CEV.

PROPOSED BACKFILL

BACKFILL SHALL BE PER COUNTY OF LOS ANGELES STANDARDS.

STREET TYPE SOIL CLASS

MAJOR	N/A	N/A
SECONDARY	N/A	N/A
LOCAL	N/A	N/A
ALLEY	N/A	N/A
RECORD AVAILABLE  SUB MAP #: N/A		
STREET NAME	N/A	I N
MATERIAL	N/A	
LINEAR FEET	N/A	1

EXCAVATION DATA				
Y OF:	LOS ANGELES COUNTY			
ACING:	UG CONDUIT			

EXCAVATION IN CONCRETE SIDEWALK

	TOTAL EX	CAVATION:	35 SQ FT		
	NUMBER OF CUTS:			1	
		DATE	ATTID	DAWN HOLTZMAN	
	DRAWN	11/18/13	CHC / AM0266	TELEPHONE NUMBER 818-778-2404	
	CHECKED			EMAIL ADDRESS DH7852@ATT.COM	
	APPROVED	11/20/13	DH7852	FACILITY ENGINEER AMY ILLANGAKOON	
	DATE REVISIONS		IS	949-313-6094	
				B1-26	
				AGOURA	
Consulting, LLC				UNDERGROUND CONSTRUCTION PROJECT NUMBER	
1700 E. Garry Ave. , Suite 210	SCALE 1" = :		THOMAS GUIDE 586 - J7	9210185	
Santa Ana, CA 92705 (949) 250-0004 / FAX (949) 250-0006	FILENAME: B126 9210185.dwg			DRAWING: 1/1	