

WORKING SERVICES TO BE TERMINATED AT  
SNI AT FOREST SERVICE PROPERTY LINE:  
661-269-1870 - CABLE=0217, PAIR=32  
661-268-8024 - CABLE=0217, PAIR=41

## CONSTRUCTION NOTES

1. NOTIFY ENGINEER OF ANY CHANGES OR DISCREPANCIES.
2. INTERCEPT BURIED CABLE ON SOUTH SIDE OF SOLEDAD CANYON RD AND CUT CABLE AND TURN UP INTO NEW CAD 6 PEDESTAL.
3. PLACE 15 PAIR TERMINAL BLOCK IN PEDESTAL.
4. CUT BRIDGED TAP OFF AT CAD 6 PEDESTAL ACROSS ROADWAY.
5. TEST ALL PAIRS AND NOTIFY EWO OF TEST RESULTS WHEN COMPLETE.
6. CABLE INTO FOREST SERVICE LAND WILL BE CUT OFF AND ABANDONED.

### APPROVAL NOTES

1. SAI CLOUD NOT NEEDED PER 22 STATE STAFF. CONTACT JN1492 FOR ADDITIONAL INFO.
2. DUE TO UNKNOWN FUTURE REQUIREMENTS TERMINAL SIZED TO ENERGIZE ALL 11 PAIRS OF THE DISTRIBUTION CABLE.

## TRANSMISSION NOTE

1. SEE CURRENT DADR FILED IN  
MIC / SUPPORTING DOCUMENTS.

TG 4464-B7  
PLR AA1621  
DESIGN DATE: 8/27/2013  
CONST. ARC                      DATE COMP.

GEO/CO KC27

EXCH AGUA DULCE


ENG'R RS3472 TEL: 661-266-2037

ENG'R ARC VOKDG01B0

TYPE OF CONST.
PEDESTAL TERMINAL PLACEMENT

RO/EST No. 9316153

DWG 1 OF 8 P-504 REL # 0

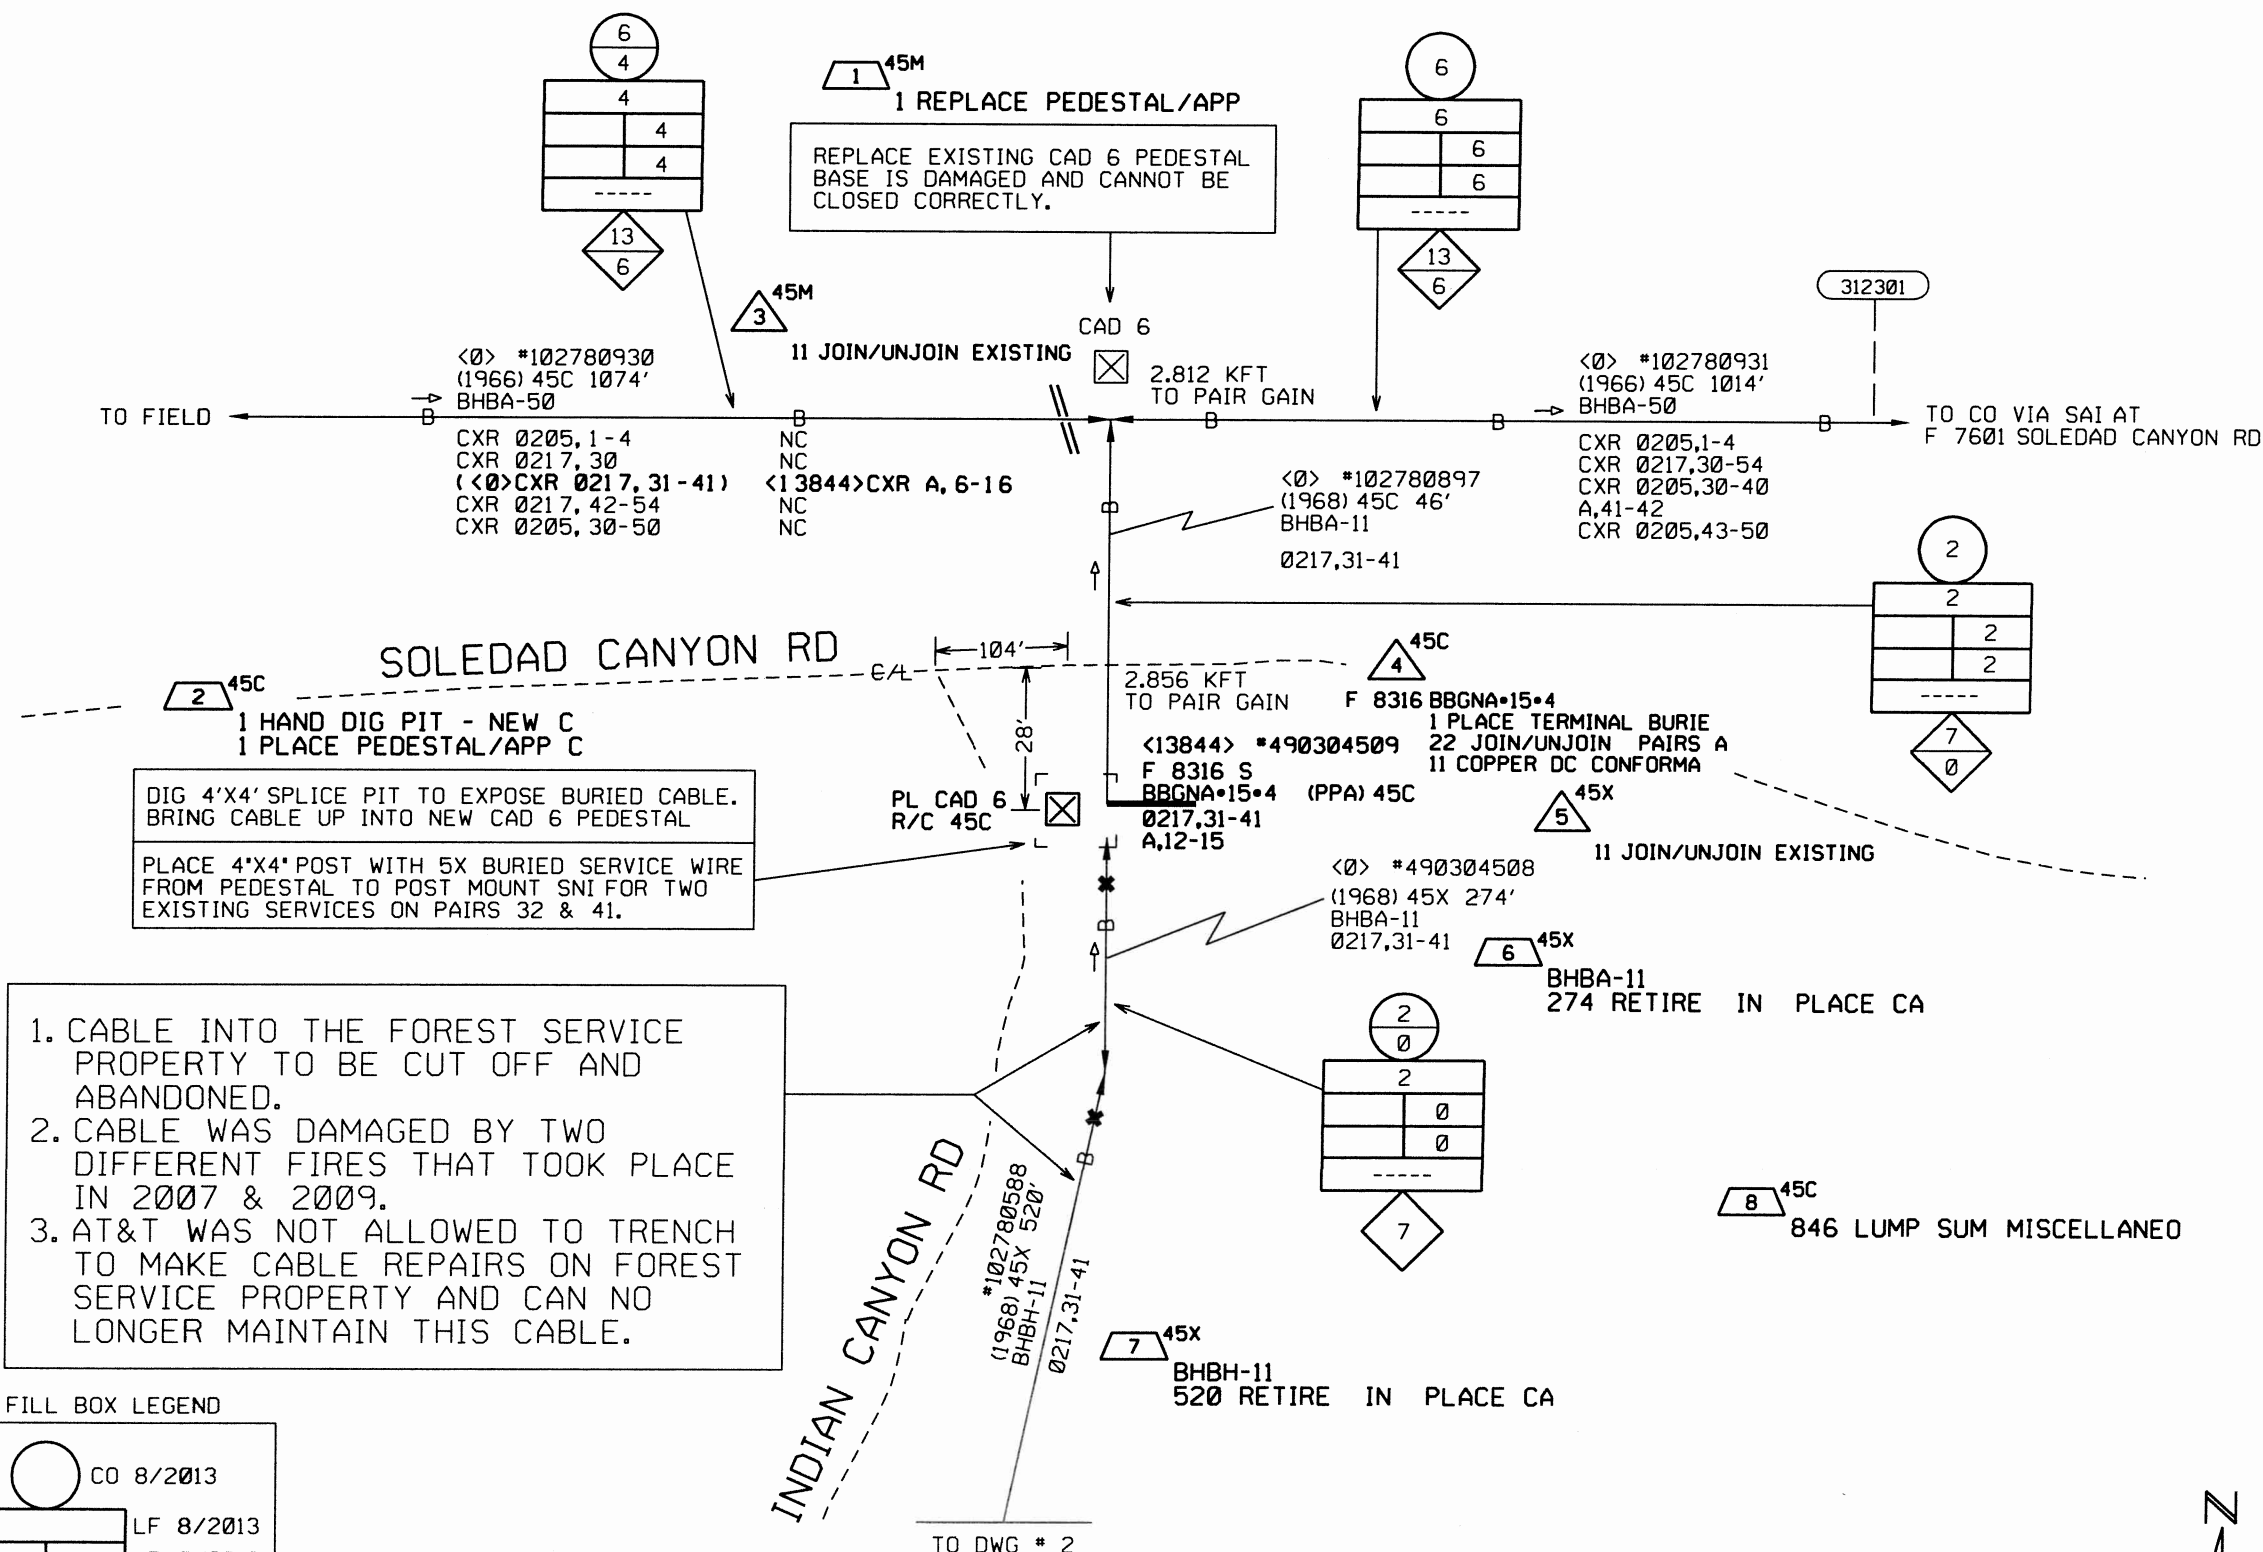

FILL BOX LEGEND

