


**PLACEMENT DATA**

- ① PL. SIDEWALK ANCHOR & INSULATED DOWN GUY EAST OF POLE # 871422E WITH 7 QUEENS POST R/C 1C

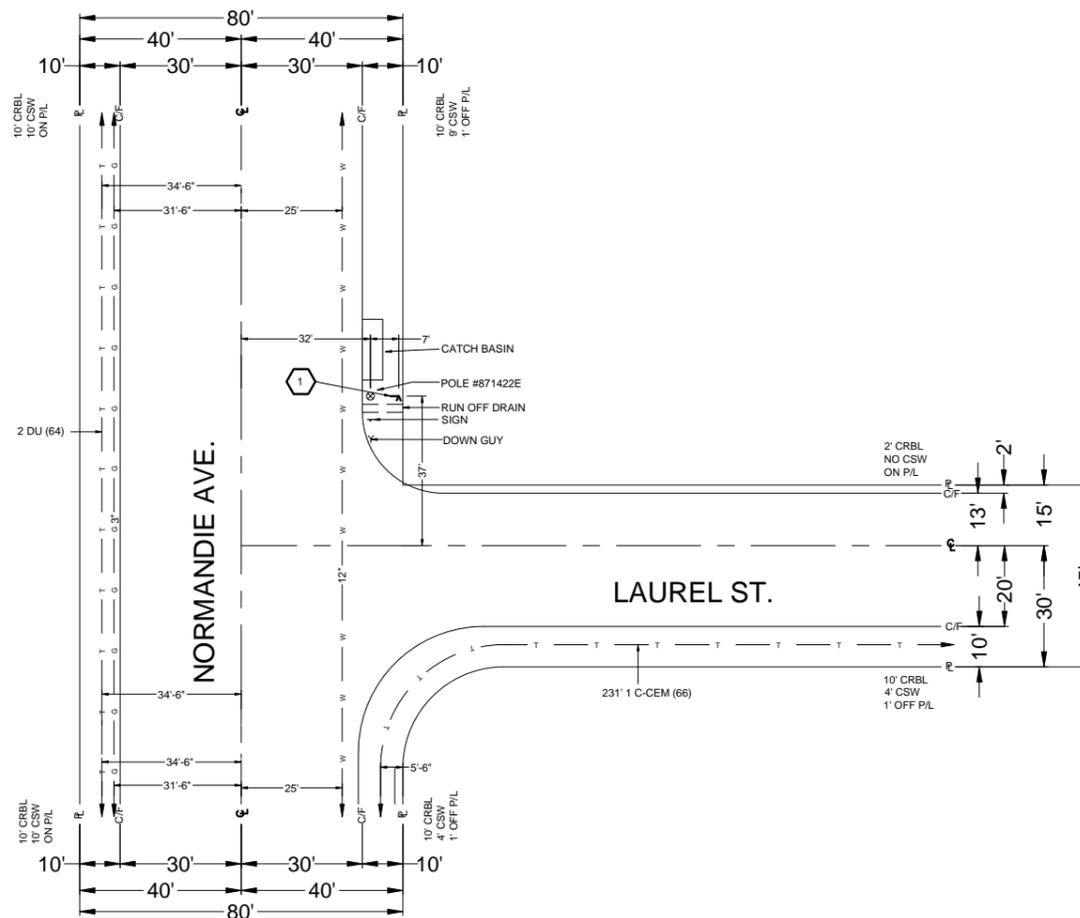

**CONSTRUCTION REQUIREMENTS**

1. MAINTAIN MINIMUM COVER OF 36" BELOW FLOW LINE.
2. VERIFY EXISTING SUBSTRUCTURES PRIOR TO EXCAVATION.
3. ALL 4" TO CONFORM TO PTS.-77 OR EQUIVALENT.
4. ALL 2" TO CONFORM TO PTS.-66 OR EQUIVALENT.
5. ALL BACKFILL TO BE SAND 12" BELOW AND 6" ABOVE.
6. DO NOT BACKFILL OVER ANY TELEPHONE BURIED SPLICE LOCATIONS UNTIL AUTHORIZED BY TELEPHONE COMPANY INSPECTOR
7. PLACE # 6 TINNED GROUND WIRE AT BONDING POINTS. (SEE BONDING DETAIL)
8. PLACE PULL ROPE IN NEW CONDUIT.
9. DO NOT CUT CURB & GUTTER.
10. ALL SURFACES AND LANDSCAPES WHICH HAVE BEEN REMOVED OR DAMAGED IN THE COURSE OF CONSTRUCTION SHALL BE RECONSTRUCTED OR REPLACED TO AT LEAST EQUAL OR BETTER THAN THE PREVIOUS OR ADJACENT SURFACE.
11. ALL TRAFFIC CONTROL TO BE IN ACCORDANCE WITH THE CALIFORNIA MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) LATEST EDITION.
12. PER AT&T GUIDELINES, ALL HANDHOLES, SPLICE BOXES, AND MANHOLES TO BE PURCHASED FROM EITHER NEWBASE OR UTILITY VAULT.

THIS PROJECT REQUIRES EXCAVATION. CONSTRUCTION WILL UTILIZE AND IMPLEMENT ALL BEST MANAGEMENT PRACTICES (BMP's) AS REQUIRED TO ENSURE COMPLIANCE WITH AT&T POLICY LETTER ISSUE FEBRUARY 21, 2003 AND REVISED IN OCTOBER 2006 BY ENVIRONMENTAL MANAGEMENT CONCERNING STORM WATER PERMITTING AND STORM WATER POLLUTION PREVENTION PLANS (SWPPP's) AND IN ACCORDANCE WITH THE CLEAN WATER ACT (1972) AND EPA REGULATIONS PUBLISHED IN 1990 AS MODIFIED BY THE PHASE II RULE IN 1999.

LOCATION: EAST SIDE OF NORMANDIE AVE, 37' NORTH OF LAUREL ST

DESCRIPTION: PLACE 1' SIDEWALK ANCHOR (7' TO EAST) IN DIRT AT POLE 871422E

BACKFILL SHALL BE PER LA COUNTY STANDARDS

STREET TYPE	SOIL CLASS	PROPOSED BACKFILL
MAJOR	N/A	N/A
SECONDARY	N/A	N/A
LOCAL	N/A	N/A
ALLEY	N/A	N/A

CONDUIT RECORD: A312C44  
NORMANDIE AVE  
1ST MH S/O IMPERIAL HWY TO  
ALLEY S/O IMPERIAL HWY  
SUB MAP #: N/A



STREET NAME: N/A  
MATERIAL: N/A  
LINEAR FEET: N/A

**EXCAVATION DATA**

COUNTY OF: LOS ANGELES COUNTY  
PLACING: 1" ANCHOR

EXCAVATION IN  
EXCAVATION IN CONCRETE SIDEWALK  
EXCAVATION IN ASPHALT STREET  
EXCAVATION IN ASPHALT ALLEY  
EXCAVATION IN DIRT 1' X 1' = 1 SQ FT

TOTAL EXCAVATION: 1 SQ FT

NUMBER OF CUTS: 1

DATE	ATTID	LAYOUT ENGINEER
03/06/14	MIN	JESS CORTEZ
CHECKED		ic1519@att.com
APPROVED		LINDA KUE

DATE REVISIONS  
A312  
CENTRAL OFFICE  
PLYMOUTH

SCALE: 1" = 20'  
THOMAS GUIDE: 703-J7  
PROJECT NUMBER: 8792734 REL 3

FILENAME: A312 8792734 REL 3.dwg  
DRAWING: 1/1

