NOTE TO CREW:
TRANSFER:
3– #4BC 12KV
1– CATV

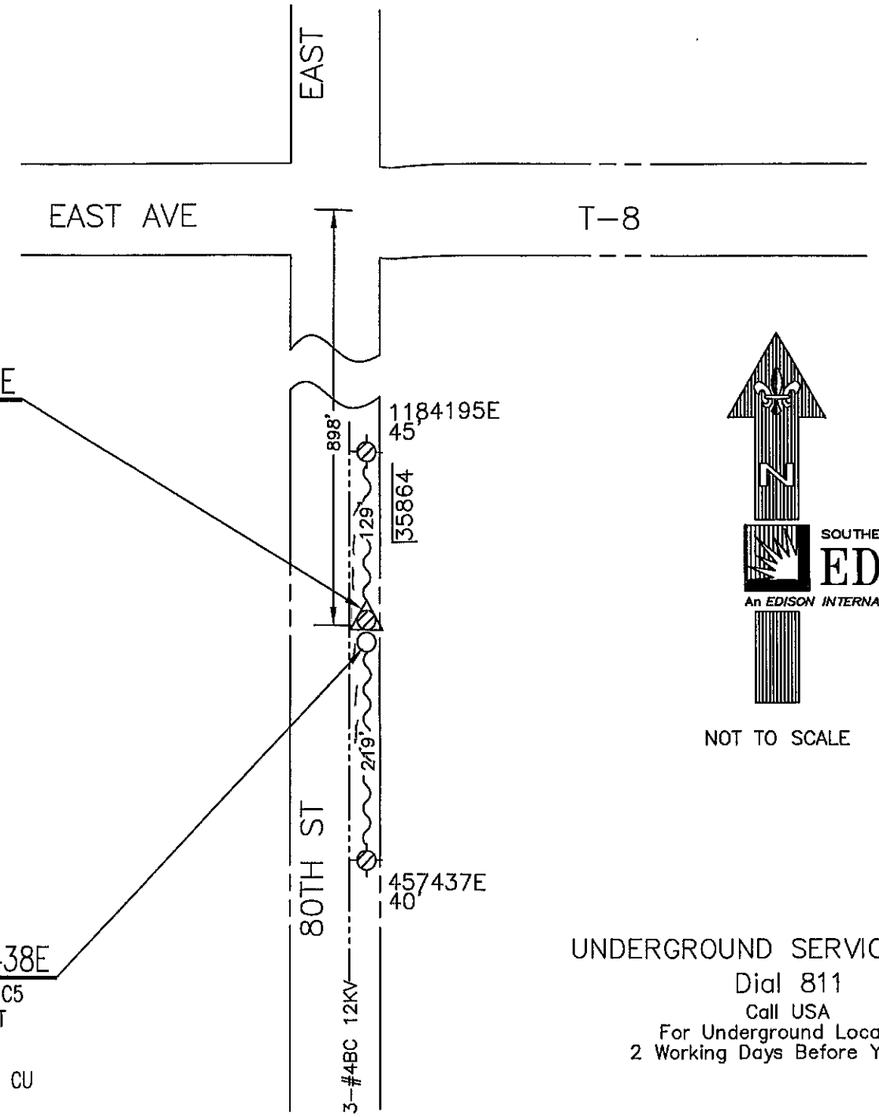

3 RM 457438E
40' Class C5
RM: 1– POLE 40' CLASS 5 WOOD FULL TREAT
RM: 1– XA SNGL VB 10' STEEL PINS
RM: 3– INS GLASS/POLY 35KV & LESS
RM: 2– AG SPAN GUY 7/32" – 200'
SET HARD SOUTH
E TO PTD

Clear will encroach on
N/B lane of 80th st e
in front of 35864 80th e
on 03/25 09:00 – 15:00

4 IN 457438E
40' Class C5
IN: 1– POLE 40' CLASS 5 WOOD FULL TREAT
IN: 1– XA SNGL FB 10' STEEL PINS
IN: 3– INS POLY W/PIN 12KV CLMP #6–4/0 CU
IN: 2– AG SPAN GUY 7/32" – 200'
IN: 1– MISC AVIAN HOOD FOR HENDRIX INSUL #4–653

N

SOUTHERN CALIFORNIA EDISON
An EDISON INTERNATIONAL Company

NOT TO SCALE

UNDERGROUND SERVICE ALERT
Dial 811
Call USA
For Underground Locating
2 Working Days Before You Dig

NOTES:
CIRCUIT: CALIBER 12KV
SUB: PALMDALE
CIRCUIT:
SUB:
REAR PROPERTY NO
TRUCK ACCESS YES
HAND DIG NO
TRAFFIC CONTROL NO
PTC NO
ROUTE #
BULLETIN 322 NO
ENVIRONMENTAL YES
PERMIT REQ'D NO
TYPE
TREE TRIMMING NO
CONCRETE REPAIR REQ'D NO
CRANE SET NO
GPS:
LAT: 34° 31' 59.2"
LON: 117° 59' 17.1"
ELEV: 2829'

DISTRICT 36 – ANTELOPE VALLEY	PROJ. MGR. JOHN T. RODRIGUEZ PHONE (714) 973–5678		PLANNER KEVIN MCDONALD (HWI) PHONE (951) 567–3618		
FOREMAN	TRUCK NO.	P/E	INVENTORY MAP NO. 121–86	THOMAS GUIDE 4287 H7	GRID NO. 000	DESIGN NO. 530362_0.01
CSD 140 Y ___ N X	BY–PASS CODE	EXISTING ___ CHANGE TO ___	TLM CHECKED ___ %LOAD	J.P.A. NO.	ASSOCIATED DESIGN NO.
PRODUCT/SAP NO. 754677-INFRASTRUCTURE REPLACEMENT - DET POLE REPLACEMENT			PRODUCT/SAP NO.		PRODUCT/SAP NO.

TYPE	APPROVED BY	DATE	CHECKED BY	DRAWN BY	PAX #
				HWI/ D.M.	

Southern California Edison Company

PROPOSED CONSTRUCTION (LOCATION)
TD 754677
35864 80TH ST EAST
LITTLEROCK

SHEET ___ OF ___
JOB NO. 530362_0.01