108TH STREET - VAN NESS AVENUE TO DENKER AVENUE
NORTH SIDE- PARKWAY IMPROVEMENTS

HOUSE NUMBER	(1) (LF)	(5) a x b (FT x FT)	(14) (EA)	COMMENTS
				BEGIN @ NW CORNER OF DENKER AVE.
HN 1611		20 x 4		
HN 1615		20 x 4		
HN 1619		20 x 4		
HN 1625		20 x 4	1	W=12'-RES: APRON ONLY: JOIN AT FRONT OF SIDEWALK. SEE DRIVEWAY APRON RECONSTRUCTION DETAIL ON SHEET 3.
HN 1629		20 x 4		
HN 1633		20 x 4	1	W=12'-RES: APRON ONLY: JOIN AT FRONT OF SIDEWALK. SEE DRIVEWAY APRON RECONSTRUCTION DETAIL ON SHEET 3.
HN 1645			1	W=12'-RES: APRON ONLY: JOIN AT FRONT OF SIDEWALK. SEE DRIVEWAY APRON RECONSTRUCTION DETAIL ON SHEET 3.
HN 1649			1	W=12'-RES: APRON ONLY: JOIN AT FRONT OF SIDEWALK. SEE DRIVEWAY APRON RECONSTRUCTION DETAIL ON SHEET 3.
HN 1713			1	W=14'-COM: APRON ONLY: JOIN AT FRONT OF SIDEWALK. SEE DRIVEWAY APRON RECONSTRUCTION DETAIL ON SHEET 3.
HN 1741			1	W=20'-RES. COMMON DWY: RECONSTRUCT APRON ONLY: SEE DRIVEWAY APRON RECONSTRUCTION DETAIL ON SHEET 3.
HN 10655		13 x 4		NW CORNER OF GRAMERCY PLACE
HN 2019		29 x 4 3.5 x 4	1	NE CORNER OF WILTON PLACE: W=12'-RES: JOIN AT FRONT OF SIDEWALK. SEE DRIVEWAY APRON RECONSTRUCTION DETAIL ON SHEET 3.
HN 10657		13 x 4 3 x 8 HW 54 x 4	1	W=12'-RES: RECONSTRUCT APRON ONLY: SEE DRIVEWAY APRON RECONSTRUCTION DETAIL ON SHEET 3. PERMIT TO ENTER
HN 2039		20 x 4	1	W=18.5'-RES. COMMON DWY: RECONSTUCT APRON ONLY: SEE DRIVEWAY APRON RECONSTRUCTION DETAIL ON SHEET 3.
HN 2045		24.5 x 4 3 x 3.5 HW		PERMIT TO ENTER
HN 2051		8 x 4 8 x 4		
HN 2057		28.5 x 4 3 x 3.5 HW		PERMIT TO ENTER
HN 10720		4 x 4 20 x 4		W=16'-RES: RECONSTRUCT APRON ONLY: SEE DRIVEWAY APRON RECONSTRUCTION DETAIL ON SHEET 3.
HN 2131		24 x 4		
HN 2135		17.5 x 4		
HN 2141		8 x 4		
HN 2147		29 x 4		

108TH STREET - VAN NESS AVENUE TO DENKER AVENUE
SOUTH SIDE- PARKWAY IMPROVEMENTS

HOUSE NUMBER	(1) (LF)	(5) a x b (FT X FT)	(24) (EA)	(25) (EA)	(28) (EA)	REMOVE TREE (EA)	COMMENTS
							BEGIN @ SE CORNER OF VAN NESS AV
HN 2150 TO HN 2140		68 X 4		1		1	REMOVE TREE NEAR STREET LIGHT & ROOT PRUNE OTHER TREE @ HN 2144
HN 2134		25 X 4		1			
HN 2114		30 X 4		1			
HN 2108		3 X 4					
HN 2102						1	
							BEGIN @ SE CORNER OF WILTON PL
HN 2056		20 X 4					
HN 2040	30	16 X 4 12 X 4	1			1	TREE TYPE: GOLD MEDALLION TREE: A2-8. GUTTER= 1'.
HN 2034		4 X 4 8 X 4 8 X 4					
HN 2030		20 X 4 4 X 7 HW		1			PERMIT TO ENTER
HN 2018		8 X 4 3 x 4 HW					PERMIT TO ENTER
HN 2008		12 X 4	1			1	TREE TYPE: GOLD MEDALLION TREE
HN 2002		24 X 4 66 X 4				1	END @ SW CORNER OF GRAMERCY PLACE
							BEGIN @ SE CORNER OF GRAMERCY PLACE
HN 1956		12 X 4		1	1		TEL MH: BY OTHERS
HN 1950		40 X 4				1	
HN 1940		20 X 4					
HN 1934		30 X 4					
HN 1928	25	25 X 4				1	PER SPPWC 120-2. A2-8. GUTTER = 1 FT.
HN 10803	30	45 X 4				1	SW CORNER OF VAN WICK ST (ST ANDREWS PL): A2-8. GUTTER = 1 FT.
							SEE NOTE 5 HEREON THIS SHEET.

108TH STREET - VAN NESS AVENUE TO DENKER AVENUE
(20) NORTH SIDE- CURB RAMPS

	(2) (LF)	(37) (EA)	COMMENTS
NW CORNER OF CIMARRON ST	21	1	CASE B: HN 10721
NE CORNER OF CIMARRON ST	21	1	CASE B: HN 10720
NW CORNER OF WILTON PL	21	1	CASE B: HN 10657
NE CORNER OF WILTON PL	21	1	CASE B: HN 2019
NW CORNER OF GRAMERCY PL	21	1	CASE B: HN 10655
NE CORNER OF WESTERN AVE	21	1	CASE A: HN 10714

108TH STREET - VAN NESS AVENUE TO DENKER AVENUE
(20) SOUTH SIDE- CURB RAMPS

	(1) (LF)	(2) (LF)	(5) a x b (FT x FT)	(37) (EA)	COMMENTS
SE CORNER OF WESTERN AVE		21		1	CASE B: HN 10804
SE CORNER OF MANHATTAN PL (THOREAU ST)	21			1	CASE B: HN 1820
SW CORNER OF MANHATTAN PL (THOREAU ST)	21			1	CASE B: HN 1842
SE CORNER OF ST ANDREW'S PL (VAN WICK ST)			4 X 4	1	REMOVE AND REPLACE EXISTING 4'X 4'GROOVED RAMP WITH 4" PCC PRIOR TO THE INSTALLATION OF DETECTABLE WARNING SURFACE.: HN 10800. SEE SHEET 12 FOR CROSS GUTTER RECONSTRUCTION.
SW CORNER OF GRAMERCY PL (CULLIVAN ST)	21			1	CASE B: HN 2002

108TH STREET - 700' W/O VERMONT AVE TO 56' W/O VERMONT AVE
(20) WEST SIDE- CURB RAMPS

	(37) (EA)	COMMENTS
NW CORNER AT VERMONT AVE	1	INSTALL DETECTABLE WARNING SURFACE.
SW CORNER AT VERMONT AVE	1	INSTALL DETECTABLE WARNING SURFACE.

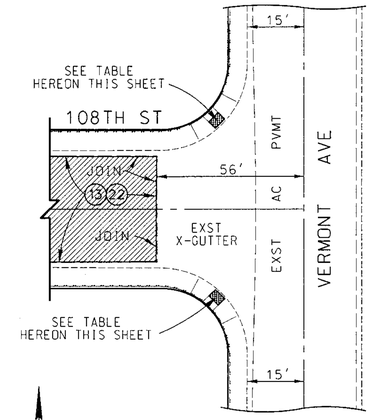

PAVEMENT JOIN DETAIL AT 108TH ST AND VERMONT AVE

NO SCALE

NOTES:

1. NO WORK SHALL BE PERFORMED IN THE CITY OF LOS ANGELES.
2. ITEM (27). TOTAL = 18 EA FROM VAN NESS AVE TO DENKER AVE.
3. ITEM (27). TOTAL = 3 EA FROM 700 FT W/O VERMONT AVE TO 56' W/O VERMONT AVE.
4. SEE DETAIL A ON SHEET 4 FOR C&G REPLACEMENT/TRENCH BACKFILL SLURRY SECTION.
5. SEE SHEET 12 FOR 108TH ST AND VAN WICK ST (ST. ANDREWS PL) INTERSECTION DETAIL.

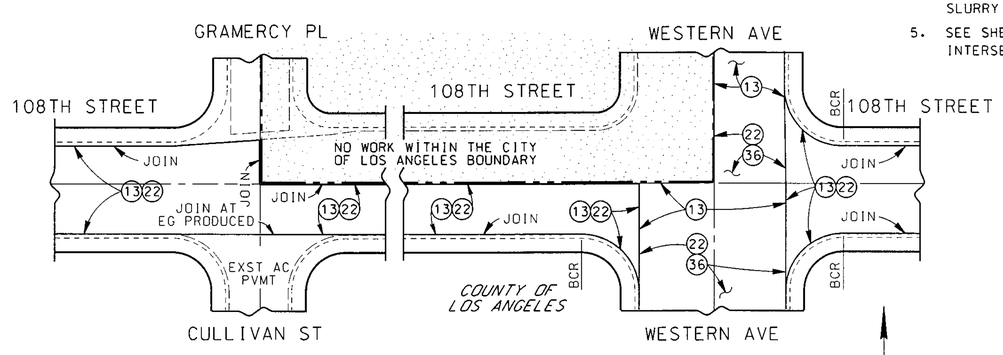

PAVEMENT JOIN DETAIL ALONG 108TH STREET WITHIN CITY OF L.A. BOUNDARY

NO SCALE

PH082480

DATE	MK	DESCRIPTION

REVISIONS

REGISTERED PROFESSIONAL ENGINEER JASPER L. JUNIO NO. 66741 CIVIL STATE OF CALIFORNIA

PROJECT ENGINEER — DATE 4-9-13

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS

108TH STREET ET AL.

108TH STREET - VAN NESS AVE TO DENKER AVE
108TH STREET - 700' W/O VERMONT AVE TO 56' W/O VERMONT AVE

TABLES-PARKWAY IMPROVEMENTS

PROJECT ID NO. RDC0014552

PCA X7201104CR | DWG | SHEET 5 OF 14

PROPOSED FOR CONSTRUCTION: DATE | ADVERTISED: DATE | AS BUILT: DATE

DRAFTER J. DIFRANCESCO | DESIGNER J. DIFRANCESCO | CHECKER JASPER JUNIO | CADD PROJECT FILE NAME RDC0014552-PLAN-RD | REVIEWED BY DATE 4-9-13

DATE: $DATE$ TIME: $TIME$ FILE: $FILE$