WESTERN AVENUE - 104TH STREET TO 1,802 FT S/O IMPERIAL HWY
EAST SIDE- PARKWAY IMPROVEMENTS

LOCATION	(1) (LF)	(5) a x b (FT X FT)	(7) a x b (FT X FT)	(11) (SY)	(14) (EA)	REMOVE TREE (EA)	(25) (EA)	(30) (EA)	COMMENTS
BEGIN @ N/S OF BRIDGE OVER 105 FWY									JOIN AT PCC PVMT LIMITS: SEE NOTE 4
919' N/O BRIDGE		16 x 4							L.A. SOUTHWEST COLLEGE
1.022' N/O BRIDGE		8 x 4							L.A. SOUTHWEST COLLEGE
1.037' N/O BRIDGE		3 x 3							
1.132' N/O BRIDGE (LA SW DWY)									SE BCR @ L.A. SW COLLEGE DRIVEWAY
BEGIN AT NE BCR AT L.A. SW COLLEGE DWY									
30' N/O BCR		16 x 4							
238.5' N/O BCR		32 x 7							
256' N/O BCR									END OF ROADWAY AC PVMT. BEGIN PCC PVMT
403' N/O BCR	40	40 x 7							CLOSE DWY APRON: SEE DRIVEWAY CLOSURE DETAIL HEREON THIS SHEET
483' N/O BCR	44	44 x 7							CLOSE DWY APRON: SEE DRIVEWAY CLOSURE DETAIL HEREON THIS SHEET
527' N/O BCR									SE BCR @ IMPERIAL HWY
BEGIN AT NE BCR AT IMPERIAL HWY		8 x 4							NE BCR @ IMPERIAL HWY: 76 GAS STATION: SEE NOTE 4
42.5' N/O BCR			67 x 6	45					SEE NOTE 6 HEREON THIS SHEET
67' N/O BCR			17 x 4	8					SEE NOTE 6 HEREON THIS SHEET
182' N/O BCR			12 x 6	8					SEE NOTE 6 HEREON THIS SHEET
276.5' N/O BCR			14 x 10	16					SEE NOTE 6 HEREON THIS SHEET
491' N/O BCR		3 x 3							
588.5' N/O BCR		14 x 10				3	3		ANIMO SOUTH L.A. CHARTER H.S. PERMIT TO ENTER
673' N/O BCR		33 x 4							
BEGIN AT NE BCR 107TH ST									
68' N/O BCR		10 x 5							LAUSD: HN 10616
146' N/O BCR		12 x 5							
158' N/O BCR	30				1			1	SPPWC 110-2. TYPE A: W=23'-COM. Y=10.5' LAUSD DWY: RECONSTRUCT C&G ADJACENT TO DRIVEWAY. TYPE A2-8 PER SPPWC 120-2: SPPWC 150-3. 4" DIA. CIP. N= 1.
END AT SE BCR 106TH ST									SEE SHEET 12 FOR PROP. BUS PAD.
BEGIN AT NE BCR 106TH ST									
60' N/O BCR		20 x 5							
103.5' N/O BCR		51 x 5							HN 10510
154' N/O BCR		11 x 5							
167' N/O BCR		75 x 5							
ECR AT 105TH ST (SIDE ST)	28	28 x 5.5							CLOSE DWY APRON: HN 10424
BEGIN AT NE BCR 105TH ST		57.5 x 14							
58' N/O BCR					1				SPPWC 110-2. TYPE A: W=20'-COM. Y=10.5' HN 10410
86' N/O BCR		20 x 9							
105' N/O BCR	30	30 x 9							CLOSE DRIVEWAY APRON
135' N/O BCR		53 x 9							
188' N/O BCR		30 x 9							CLOSE DRIVEWAY APRON: ADJACENT TO BUS STOP: SEE SHEET 12 FOR PROP. BUS PAD AT SE CORNER OF 104TH ST.

WESTERN AVENUE - 104TH STREET TO 1,802 FT S/O IMPERIAL HWY
WEST SIDE- PARKWAY IMPROVEMENTS

LOCATION	(1) (LF)	(5) a x b (FT X FT)	(18) (EA)	(39) (EA)	COMMENTS
BEGIN AT SW BCR 108TH STREET	26	26 x 11	1	1	RECONSTRUCT TOP PORTION OF CURBSIDE GRATING PER SPPWC 303-3. NO. OF GRATES= 1 AND LOCAL DEPRESSION PER SPPWC 313-3. CASE F. K=5':
BEGIN AT SW BCR ALLEY INTERSECTION		8 x 4			
41' S/O BCR		24 x 4			
57' S/O BCR 77' S/O BCR		2 x 5 HW 105 x 4			HN 10935: APARTMENT COMPLEX PERMIT TO ENTER
94' S/O BCR		3 x 5 HW			PERMIT TO ENTER
118' S/O BCR 155' S/O BCR		3 x 5 HW 2 x 5 HW			HN 10941: APARTMENT COMPLEX PERMIT TO ENTER
327' S/O BCR		8 x 4			HN 10963: ST. THOMAS BAPTIST CHURCH
403.5' S/O BCR		12 x 4			
BEGIN AT SW BCR LOHENGRIN ST					
37.5' S/O BCR		8 x 4			
65.5' S/O BCR		12 x 4			HN 11007
106' S/O BCR		8 x 4 3 x 5 HW			HN 11013: PERMIT TO ENTER
190.5' S/O BCR		8 x 4 3 x 5 HW			HN 11019: PERMIT TO ENTER
220' S/O BCR		8 x 4 3 x 5 HW			HN 11025: PERMIT TO ENTER
255' S/O BCR		8 x 4 2 x 5 HW			HN 11025: PERMIT TO ENTER

WESTERN AVENUE - 104TH STREET TO 1,802 FEET S/O IMPERIAL HIGHWAY
(20) CURB RAMPS - WEST SIDE

LOCATION	(1) (LF)	(2) (LF)	(5) a x b (FT X FT)	COMMENTS
NW CORNER OF LOHENGRIN ST	21			HN 10968: CASE B
SW CORNER OF LOHENGRIN ST	21		3 x 5	HN 11001: CASE B: PERMIT TO ENTER TO RECONSTRUCT HOUSE WALK

WESTERN AVENUE - 104TH STREET TO 1,802 FEET S/O IMPERIAL HIGHWAY
(20) CURB RAMPS - EAST SIDE

LOCATION	(1) (LF)	(2) (LF)	COMMENTS
SE CORNER OF 111TH STREET			HN 11100: SEE INTERSECTION DETAIL ON SHEET 11
NE CORNER OF 111TH STREET			HN 11034: SEE INTERSECTION DETAIL ON SHEET 11
SE CORNER OF 110TH STREET			HN 11006: SEE INTERSECTION DETAIL ON SHEET 11
NE CORNER OF 110TH STREET			HN 1757: SEE INTERSECTION DETAIL ON SHEET 11
SE CORNER OF 108TH STREET		21	HN 10804: CASE B
NE CORNER OF 107TH STREET		21	HN 10610: CASE B
NE CORNER OF 106TH STREET		21	HN 10526: CASE B
SE CORNER OF 105TH STREET		21	HN 10500: CASE A
NE CORNER OF 105TH STREET		21	HN 10424: CASE B
SE CORNER OF 104TH STREET		21	HN 10410: CASE B

NOTES:

1. NO WORK SHALL BE PERFORMED WITHIN CITY OF LOS ANGELES JURISDICTION.
2. ITEM (27). TOTAL = 7 EACH.
3. MAINTAIN EXST FL GRADE: SEE DETAIL A ON SHEET 4 FOR C&G REPLACEMENT/TRENCH BACKFILL SLURRY SECTION.
4. SEE PAVEMENT JOIN DETAIL ON SHEET 14.
5. SEE SHEET 11 FOR WESTERN AVENUE/110TH ST INTERSECTION DETAIL AND WESTERN AVENUE/111TH STREET INTERSECTION DETAIL.
6. USE 10" PCC ON 14" CMB OVER GEOTEXTILE FABRIC (MIRAFI HP370 OR AGENCY-APPROVED EQUAL)

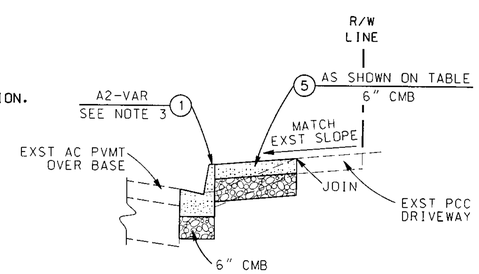

DRIVEWAY CLOSURE DETAIL
NO SCALE

DATE	MK	DESCRIPTION

REVISIONS

REGISTERED PROFESSIONAL ENGINEER JASPER L. JUNIO NO. 66741 CIVIL STATE OF CALIFORNIA

PROJECT ENGINEER — DATE 9-9-13

COUNTY OF LOS ANGELES DEPARTMENT OF PUBLIC WORKS

108TH STREET ET AL.
WESTERN AVENUE - 104TH STREET TO 1,802 FT S/O IMPERIAL HWY
TABLES-PARKWAY IMPROVEMENTS
PROJECT ID NO. RDC0014552

PCA X7201104CR | DWG | SHEET 13 OF 14

PH082488

PROPOSED FOR CONSTRUCTION: DATE — ADVERTISED: DATE — AS BUILT: DATE

DRAFTER J. DIFRANCESCO | DESIGNER J.D.F. / J.L.J. | CHECKER JASPER JUNIO | CADD PROJECT FILE NAME RDC0014552-PLAN-RD | REVIEWED BY — DATE 9-9-13

DATE: $DATE$ TIME: $TIME$ FILE: $FILE$