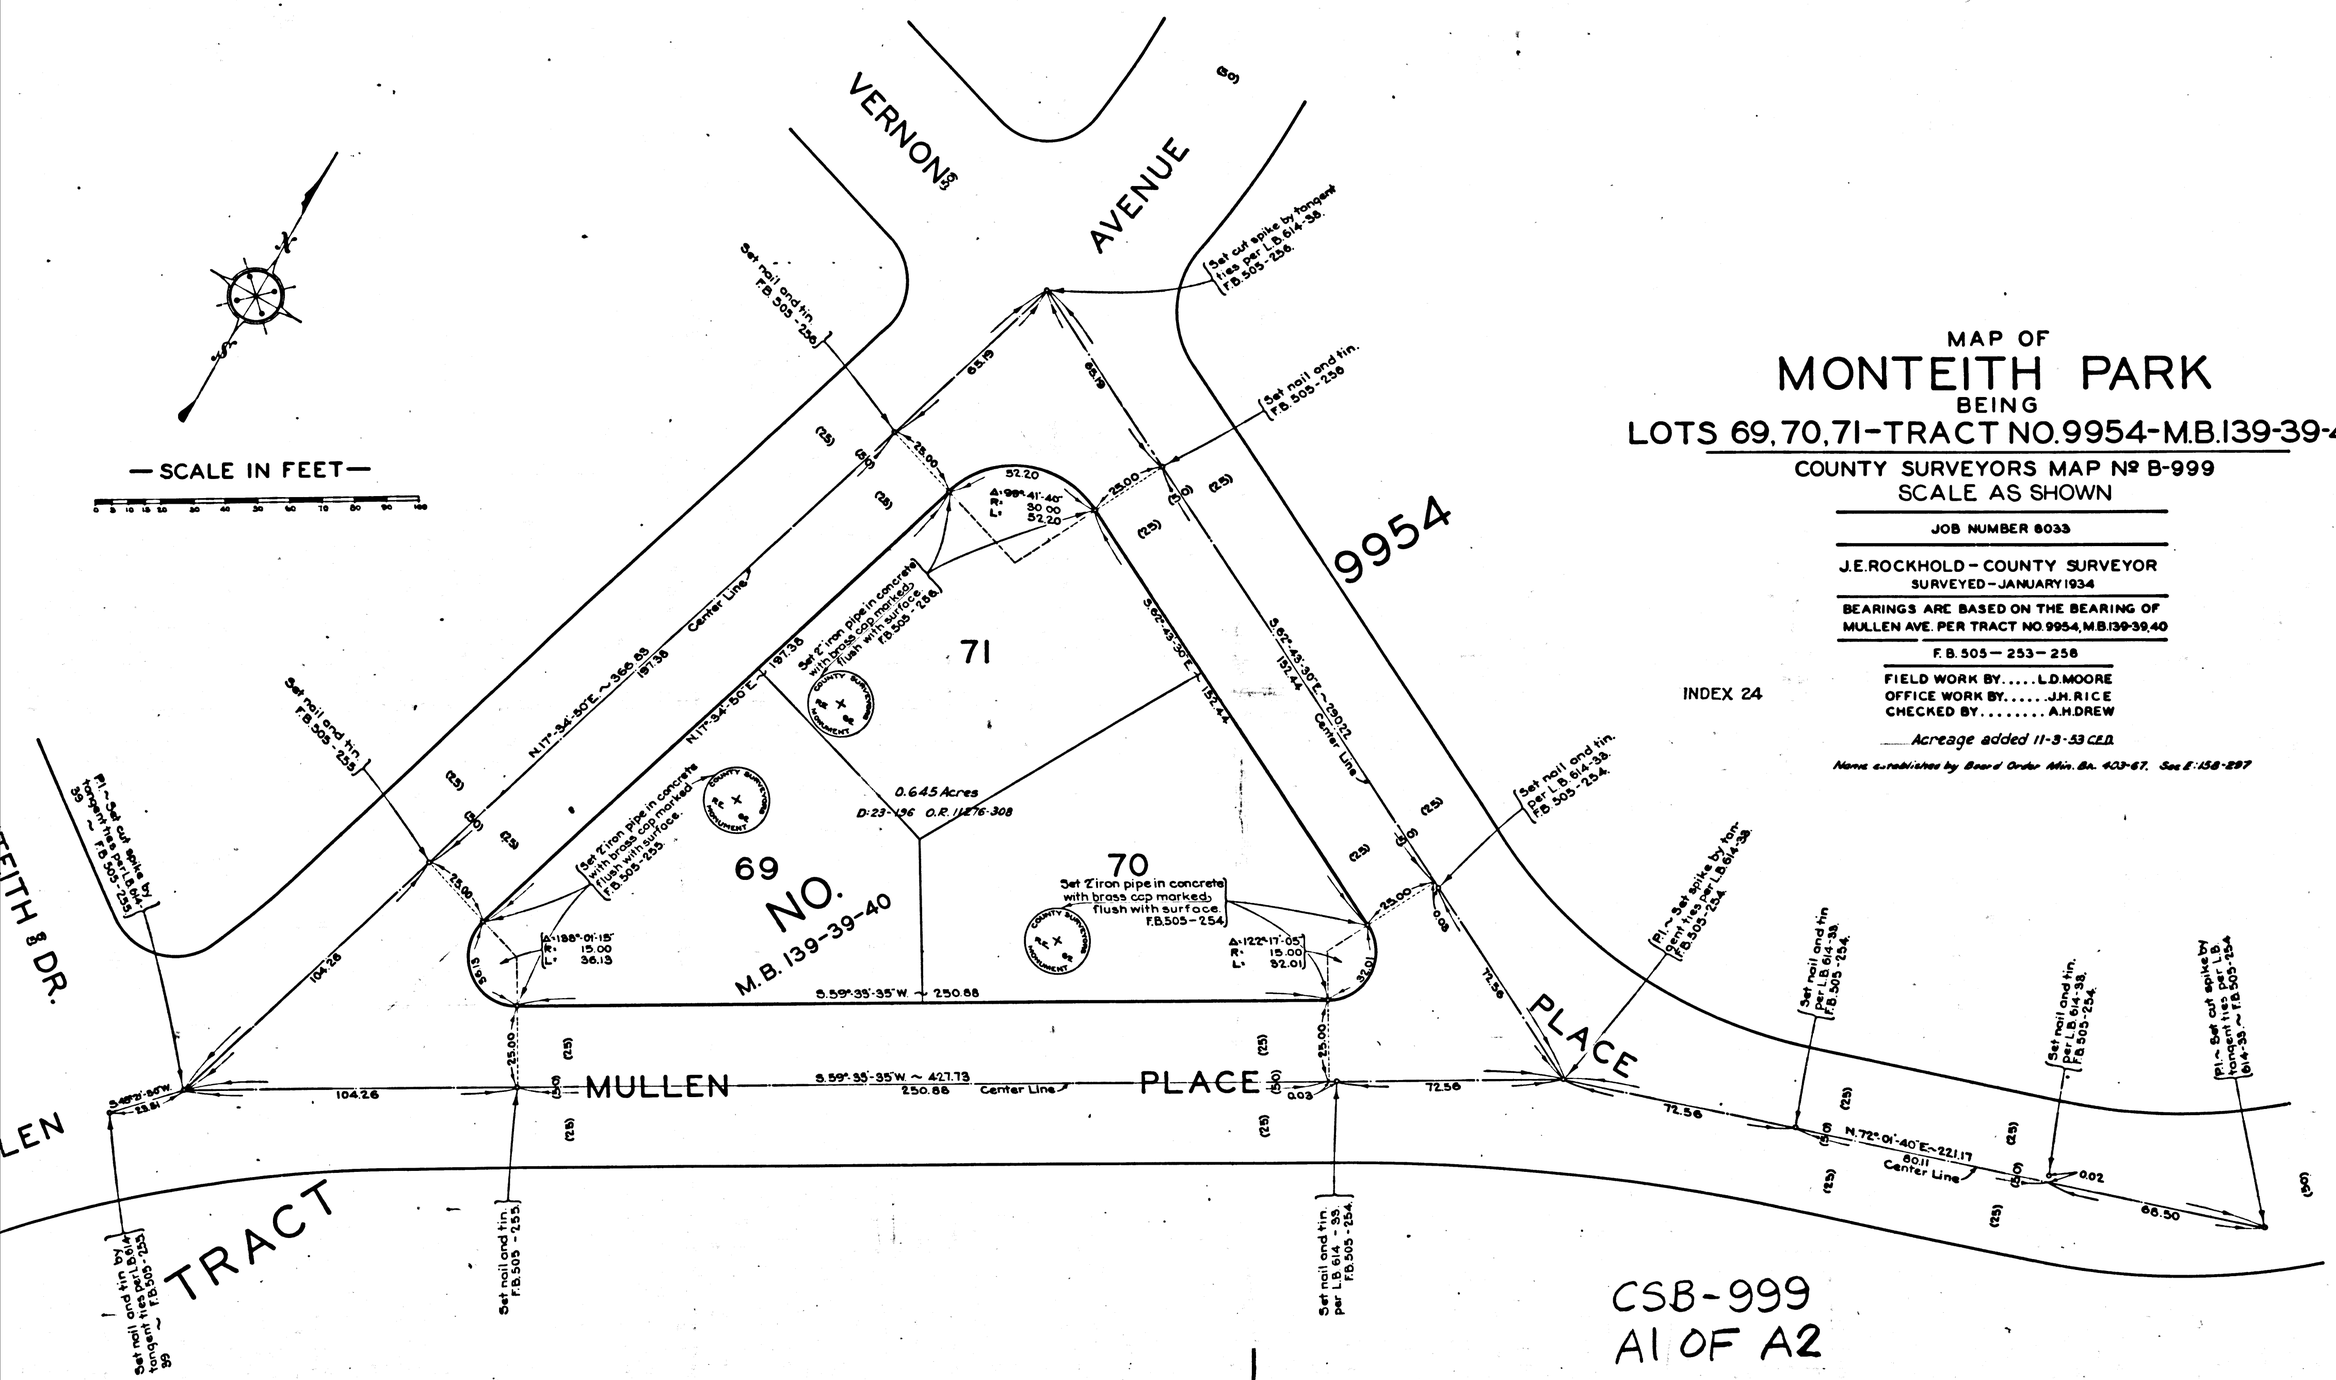
MAP OF
MONTEITH PARK
BEING
LOTS 69,70,71-TRACT NO.9954-M.B.139-39-40
COUNTY SURVEYORS MAP Nº B-999
SCALE AS SHOWN
JOB NUMBER 8033
J.E.ROCKHOLD - COUNTY SURVEYOR
SURVEYED - JANUARY 1934
BEARINGS ARE BASED ON THE BEARING OF MULLEN AVE. PER TRACT NO.9954, M.B.139-39,40
F.B. 505 — 253 — 258
FIELD WORK BY.....L.D.MOORE
OFFICE WORK BY.....J.H.RICE
CHECKED BY.....A.H.DREW
Acreage added 11-3-53 C.E.D.
Name established by Board Order Min. Bk. 403-67, Sec E:158-297
INDEX 24
— SCALE IN FEET —
VERNON AVENUE
9954
71
69
70
NO. M.B. 139-39-40
0.645 Acres
D:23-136 O.R. 11276-308
MULLEN PLACE
TRACT
MONTEITH DR.
N.17°-34'-50"E.~366.83
197.38
Center Line
S.62°-43'-30"E.~292.32
152.44
S.59°-35'-35"W.~250.88
S.59°-35'-35"W.~427.73
250.88
N.72°-01'-40"E.~221.17
60.11
104.26
72.56
66.50
Set nail and tin. F.B.505-255
Set nail and tin. F.B.505-256
Set cut spike by tangent ties per L.B.614-38. F.B.505-256.
Set nail and tin. F.B.505-258
Set 2" iron pipe in concrete with brass cap marked flush with surface. F.B.505-255
Set 2" iron pipe in concrete with brass cap marked flush with surface. F.B.505-256
Set 2" iron pipe in concrete with brass cap marked flush with surface. F.B.505-254
Set nail and tin. F.B.505-254.
Set nail and tin per L.B.614-38. F.B.505-254.
Pl.~Set spike by tangent ties per L.B.614-38. F.B.505-254
Pl.~Set cut spike by tangent ties per L.B.614-38. F.B.505-254
Pl.~Set cut spike by tangent ties per L.B.614-38. F.B.505-255
Set nail and tin per L.B.614-38. F.B.505-255
Set nail and tin per L.B.614-38. F.B.505-254
CSB-999
A1 OF A2

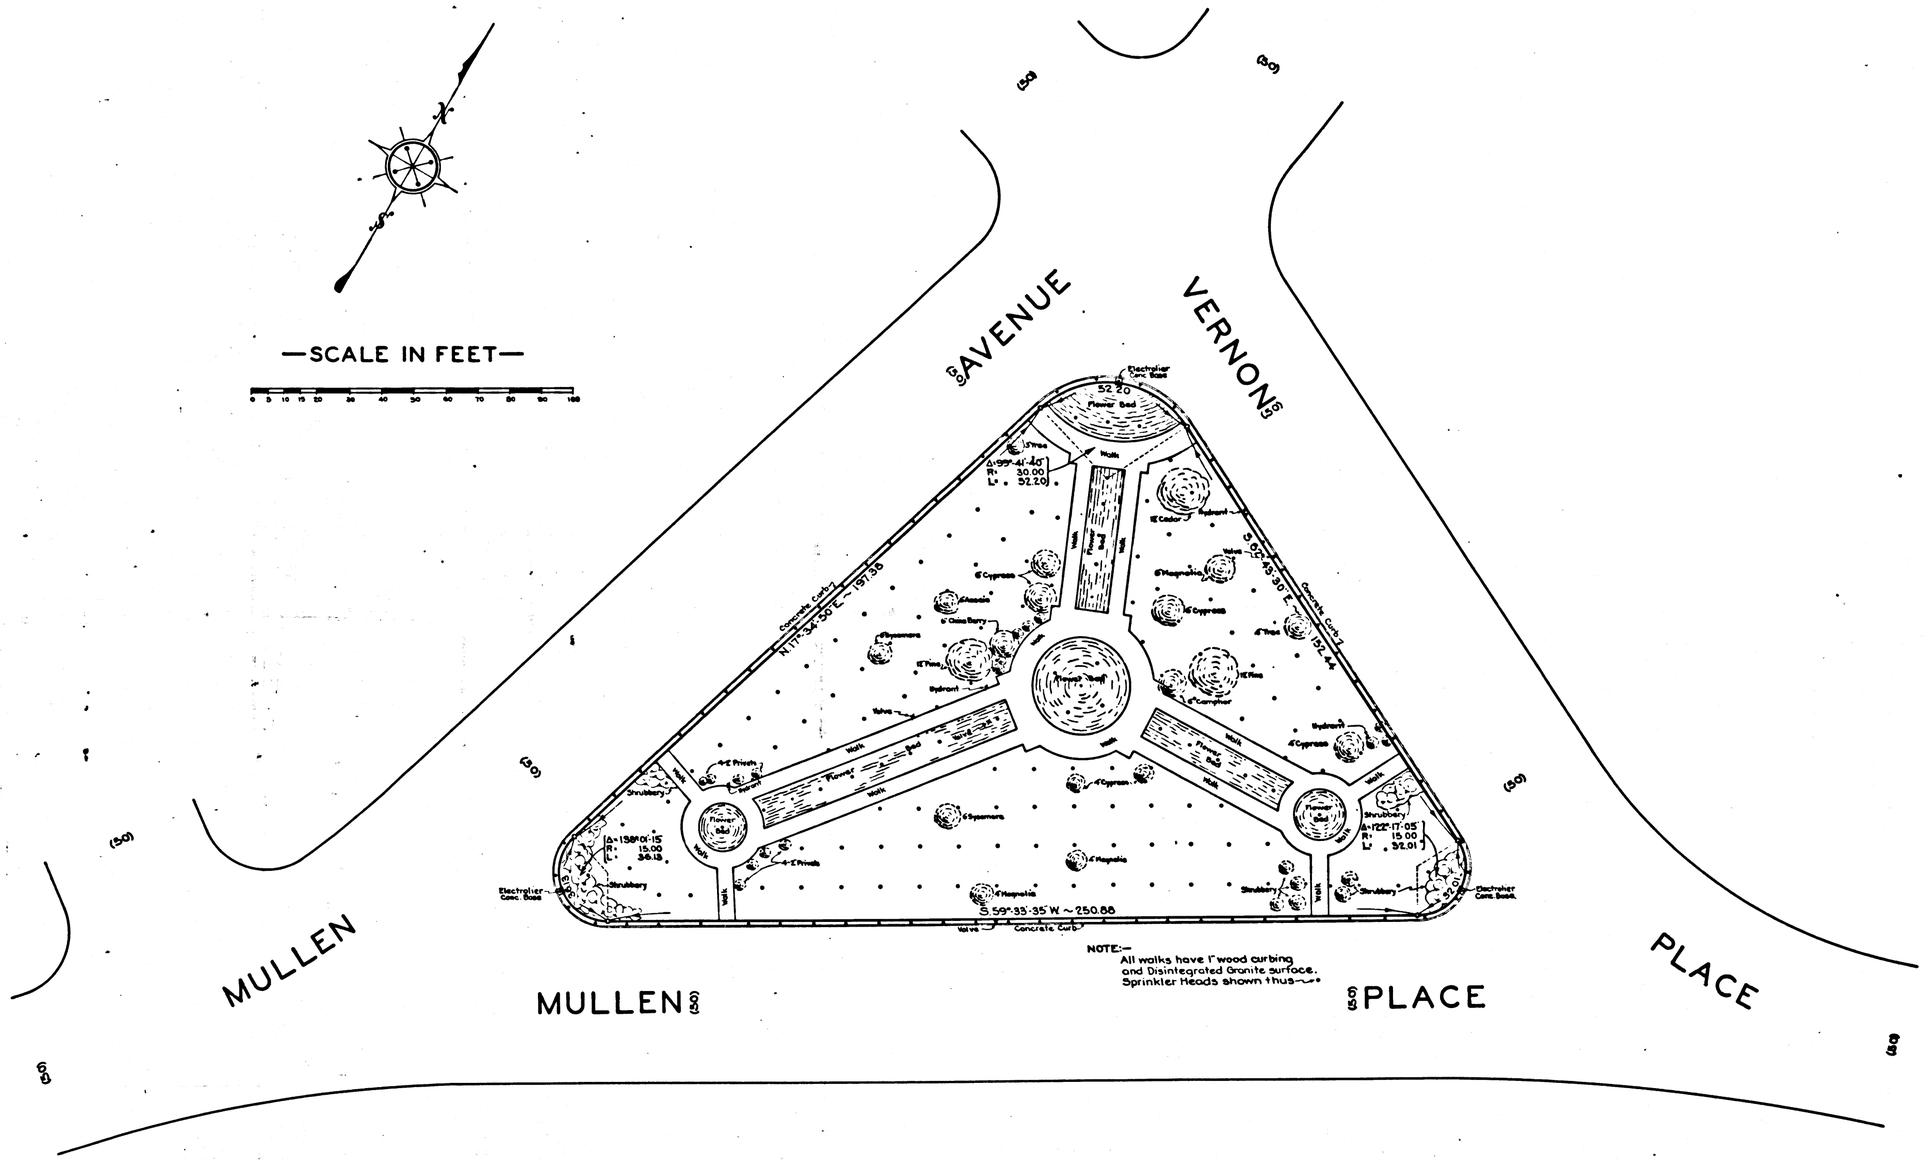

CSB-999
A2 OF A2