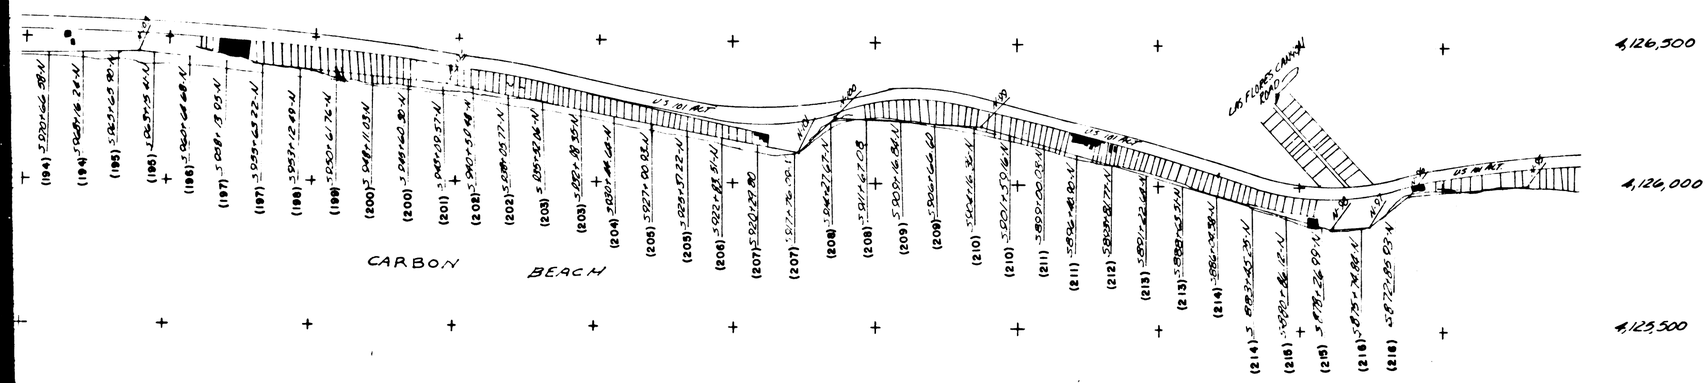

BEACH AND OFFSHORE PROFILES

SANTA MONICA BAY

FROM

TOPANGA CANYON

TO

ESCONDIDO BEACH

FROM SURVEYS AND RECORDS OF THE COUNTY ENGINEER

COUNTY SURVEYORS MAP NO. B-1726

DIVISION 2 OF 3 DIVISIONS

SHEET NO. OF SHEETS

SCALES: 1 INCH = 500 FEET

JOB NUMBERS 0300002

JOHN A. LAMBIE — COUNTY ENGINEER

SURVEYED AS INDICATED

SURVEYED UNDER INSTRUCTIONS OF THE BOARD OF SUPERVISORS PER ORDERS DATED JULY 2 AND SEPT 16, 1935, AND MARCH 6, 1945

F. B. REF'S AS SHOWN

FIELD WORK BY: W. A. RICHARDS, R. C. WILSON, G. E. DREIER

OFFICE WORK BY: J. S. HALE, C. F. RUGGLES

CHECKED BY: J. S. HALE, C. F. RUGGLES

DATUM MEAN LOWER LOW WATER PER U.S.C. & G.S. TIDE GAUGE AT LOS ANGELES OUTER HARBOR M.H.T. = 4.60'

LEGEND

MARCH 1967 C.S.F.B. 3790-3795

NUMBER STATION	ADJUSTED STATION	GRID COORDINATES NORTH	GRID COORDINATES EAST	FROM	TO	GRID BEARING	DISTANCE
N-98	877+80.73	4,125,720.66	4,095,196.76				
				N98	N99	N74°44'53"E	2,582.22
N-99	903+62.95	4,126,399.95	4,092,705.49				
				N99	N100	N87°29'04"W	1,030.78
N-100	913+93.73	4,126,445.19	4,091,675.70				
				N100	N101	S44°38'56"W	365.08
N-101	917+58.81	4,126,185.46	4,091,419.14				
				N101	N102	N80°11'03"W	2,522.15
N-102	942+80.96	4,126,615.45	4,088,933.91				
				N102	N103	N85°37'01"W	2,131.88
N-103	964+12.84	4,126,778.37	4,086,808.27				
				N103	N104	S87°00'20"W	2,094.92
N-104	985+07.76	4,126,668.94	4,084,716.21				
				N104	N105	S71°41'52"W	1,759.52
N-105	1002+67.28	4,126,116.39	4,083,045.69				

SEE INDEX SHEET NO. 1 OF 832 SHEETS

CSB-1726-6
A1 OF A2

SHEET NO. 6 OF 832 SHEETS

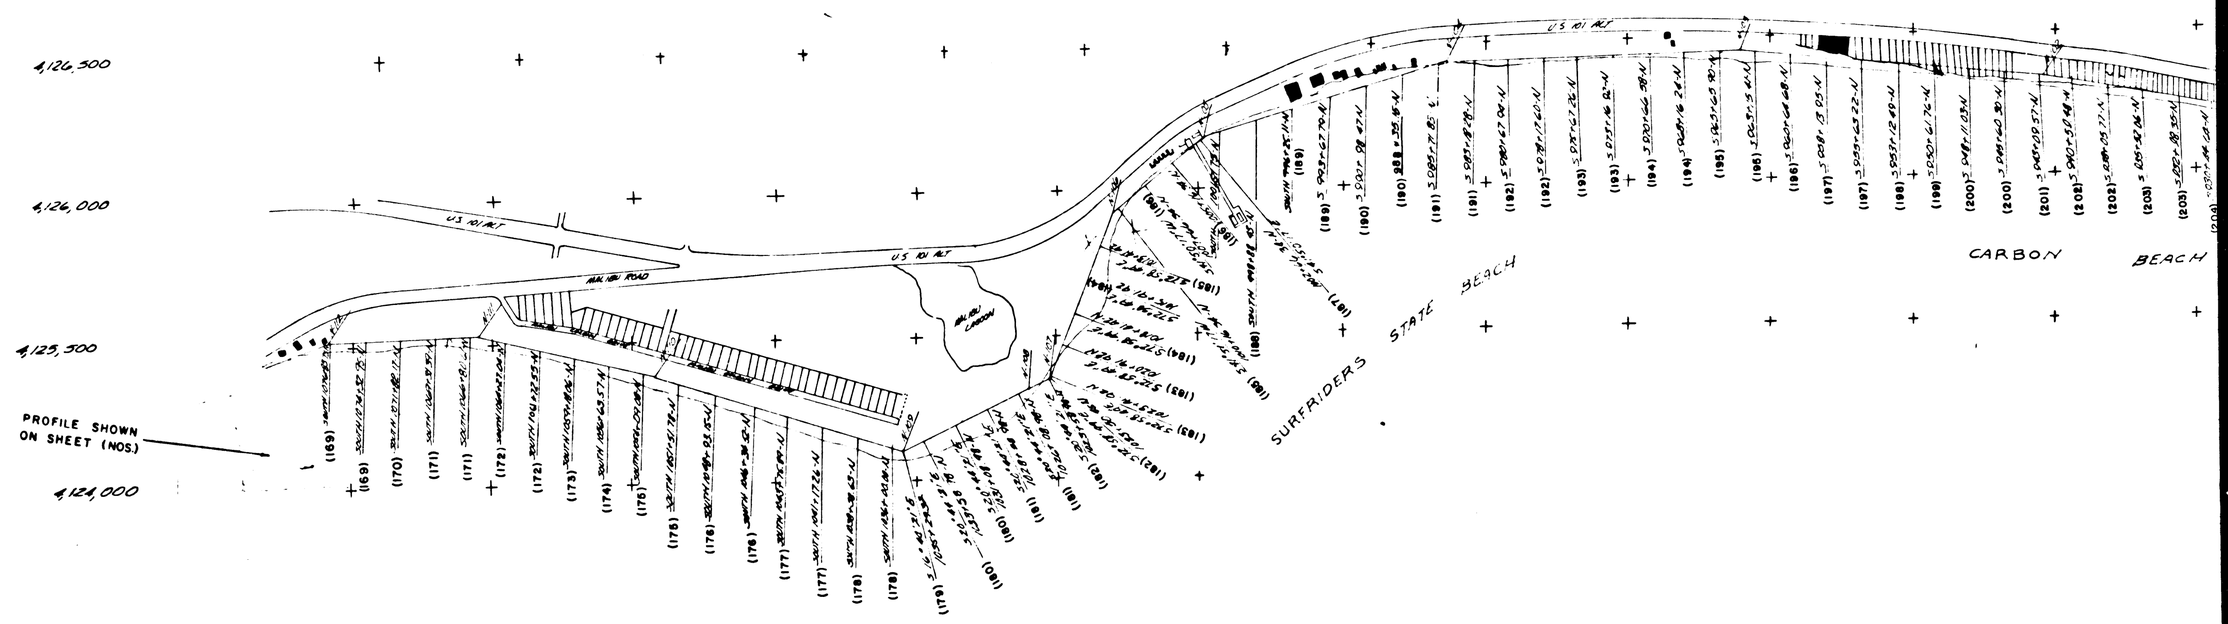

NUMBER STATION	ADJUSTED STATION	GRID COORDINATES NORTH	GRID COORDINATES EAST	FROM	TO	GRID BEARING	DISTANCE
N105	1,002+67.28	4,126,116.39	4,083,045.69				
				N105	N106	S48°09'43"W	825.58
N-106	1,010+92.86	4,125,565.71	4,082,430.61				
				N106	N107	S17°01'11"W	1,258.53
N-107	1,023+51.39	4,124,362.30	4,082,062.24				
				N107	N108	S61°15'39"W	1,79.92
N-108	1,025+31.31	4,124,277.23	4,081,907.11				
				N108	N109	S61°15'39"W	1,001.95
N-109	1,035+33.26	4,123,795.47	4,081,028.58				
				N109	N110	N75°09'36"W	1,798.33
N-110	1,053+31.59	4,124,256.06	4,079,290.24				
				N110	N111	N79°12'59"W	1,291.05
N-111	1,066+22.64	4,124,497.62	4,078,021.99				
				N111	N112	S85°28'01"W	1,083.39
N-112	1,077+06.03	4,124,411.99	4,076,941.99				
				N112	N113	S67°28'23"W	1,551.98
N-113	1,092+58.01	4,123,817.40	4,075,508.42				

NUMBER STATION	ADJUSTE STATION
N-98	877+80.7
N-99	903+62.9
N-100	913+93.7
N-101	917+58.8
N-102	942+80.
N-103	964+12.
N-104	985+07.
N-105	1002+67

CSB-1726-6
A2 OF A2