

F I E L D N O T E S .


Township 2 N. Range 11 W.

S. B. M.

South Line of Secs. 13 to 18 inclusive.

West Lines of Secs. 13 to 18 inclusive.

-----o-----

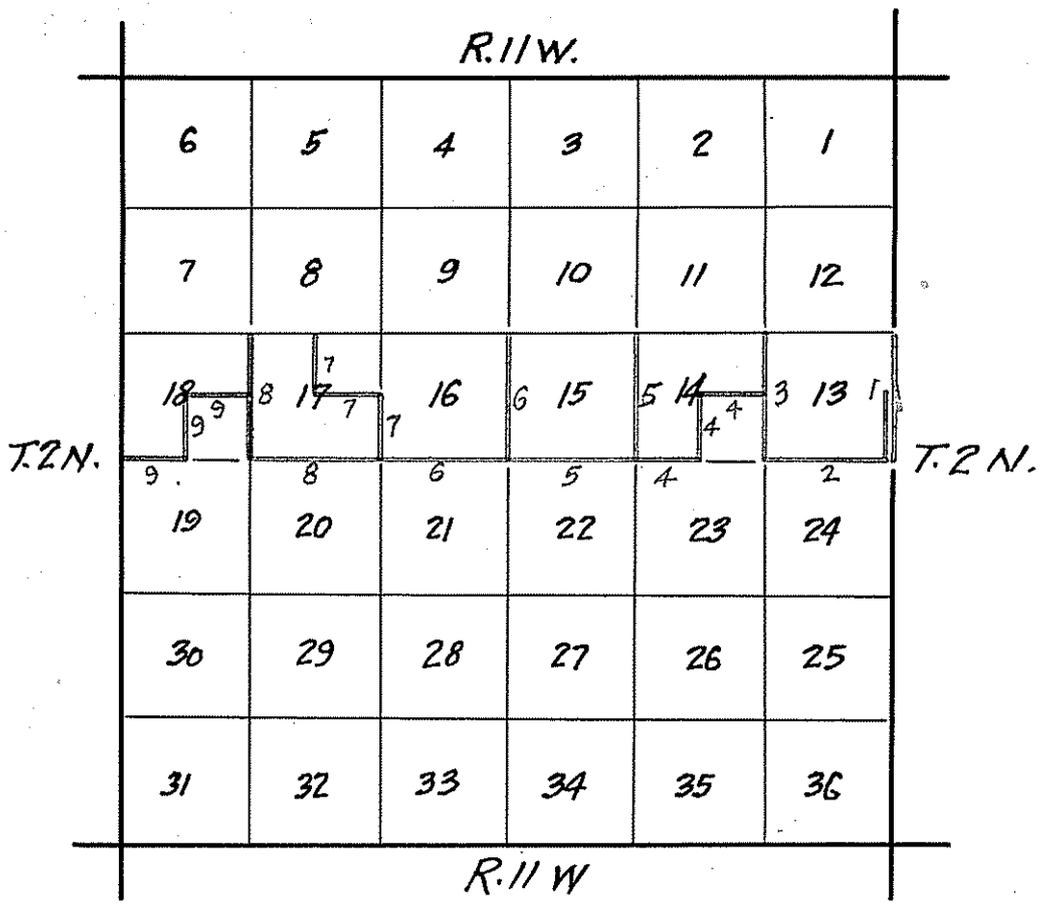

Norway 1875
Pearson 1883

From the Field Notes of Wm. H. Norway, 1875.

South on East boundary of section 13.

Var. $14^{\circ} 20'$ East.

80.00 Set a Redwood post 4 x 4 in., $3\frac{1}{2}$ ft. long in a mound of rocks on side hill facing North as per instructions from corner to sections 13, 24, 18 and 19.

This is all the land in this directions favorable for timber or other wise. I, therefore, do not run this line further South.

-----o-----

From the Field Notes of Geo. W. Pearson, 1883.

From the established corner to Tps. 1 and 2 N., Rs. 10 and 11 W., I run,

North on a random line between Rs. 10 and 11 West.

variation of my compass being $14^{\circ} 29'$ E., I set temporary $\frac{1}{2}$ mile and mile corner at each 40 and 80 chains and 13 miles, being unable to find the corner supposed to be set for corner to sections 13, 18, 19 and 24, I continued my random line North and at 3 miles 41 chs. and 16 lks. to a point 98 lks. West of the $\frac{1}{4}$ section corner between sections 13 and 18, which is a post 3 x 3 in., marked $\frac{1}{4}$ West face, firmly set in a large mound of rocks,

From which bears a

Cottonwood 14 in. dia. S. 10° W. 2.70 chs. dist.

A Pine 32 in. dia. N. $18\frac{1}{2}^{\circ}$ E., 60 lks. dist.

Both marked $\frac{1}{4}$ S. B. T.

Thence I run

South $0^{\circ} 12'$ West on a true line between sections 13 and 18 with same variation. Dividing the excess, equally in each mile.

Descending.

2.75 West fork of San Gabriel River 70 lks. wide, course East and ascending,

40.17 Set granite stone 25 x 12 x 9 in., 18 in. in the ground for corner to sections 13, 18, 19 and 24, marked with 3 notches on the North and South edges and raised large mound of rocks alongside.

Pits impracticable.

Land mountainous. Soil third rate.

Timber Pine and Oak along river. Dense undergrowth of Chaparral Brush.

-----o-----

From the Field Notes of Wm. H. Norway, 1875.

Third mile North on the West boundary of section 19.

14° 30' East.

80.00 Set a sand rock 10 x 12 x 24 in. in a mound of rocks on steep side hill facing South as instructed, for corner to sections 18, 19, 13 and 24.

From which bears a

Large rock 10 ft. cu. brs. N. 82½° W. 1.09 chs. dist.

Land rough and worthless, covered with dense brush in places.

-----o-----

Fourth Mile North on West boundary of section 18.

Var. 14¼° East.

Ascending.

19.50 Summit of spur, course Southeast and Northwest and descend.

40.00 To point in gulch, course Southeast not a suitable place to build a mound or monument, I set a Redwood post 3 x 3 in., 3 ft. long in a mound of earth and pits 100 links South as instructed for witness to ¼ section corner.

40.50 Leave gulch and ascend steep gravel side hill covered with low brush.

80.00 Set an oak post 4 x 4 in., 3½ ft. long in a mound of rocks on steep side hill, facing South, as instructed

for corner to sections 7, 18, 12 and 13.

Land rough and worthless, gravelly soil covered with low brush, third rate.

-----o-----

Subdivision Lines in Tps. 2 N., R. 11 W., S.E. B & M.

As only the Northern portion of this Tp. can be Subdivided I begin the survey from the corner to sections 13 and 24 on the Eastern boundary of the Tp. and run a true line West on a true line between sections 13 and 24.

Var. $14\frac{1}{4}^{\circ}$ East.

Along on North slope of high mountain ridge.

40.00 Set a rock 6 x 10 x 24 in. in a mound of rocks on side hill facing North as instructed, for $\frac{1}{4}$ section corner.

49.50 Cross a dry gulch 50 lks. wide, course Northeast

80.00 Set a Redwood post 4 x 4 in. $3\frac{1}{2}$ ft. long in a mound of rocks, as instructed, for corner to sections 13, 14, 23 and 24.

Land along North slope of high Ridge of mountain covered with low brush. The ravine to the South are worthless hills and no timber. Some scattering timber along the line.

-----o-----

North between sections 13 and 14.

Var. $14\frac{1}{4}^{\circ}$ East.

Descending.

20.00 Enter Canada the West fork of the San Gabriel, course East.

22.00 Cross creek 6 links wide, course East.

23.50 Leave Canada and ascend along ridge.

40.00 Set a Pine post 3 x 3 in. in a rock mound, as instructed on side hill facing South for $\frac{1}{4}$ section corner,

From which a

Pitch Pine 24 in. dia. bears N. 18° W., 60 lks. dist.

80.00 Set a Redwood post 4 x 4 in., 3½ ft. in a rock mound as instructed on summit of ridge, corner to sections 11, 12, 13 and 14,

From which a

Norway Pine 3 ft. dia. bears S. 29° W., 19 lks.

Pitch Pine 12 in. dia. bears N. 80° E., 27 lks.

Land rolling; timber Pin, Oak and cottonwood; some grazing in Canadas.

-----o-----

The line between sections 14 and 23 is very rough, I, therefore, begin at the ¼ section corner between sections 13 and 14 and run West on a true line through center of section 14.

Var. 14¼° East.

40.00 Set a Spruce Pine post 3 x 3 in., 3 ft. long in a mound of earth and pits on East side of a deep Canada, as instructed, for center to section quarter, Thence

South on ¼ section line through center of section 14.

Var. 14¼° East.

11.00 Cross gulch 50 lks. wide, course Southeast.

21.50 Cross West line of San Gabriel River 6 lks. wide, course East.

Thence ascend.

40.00 Set a pine post 3 x 3 in., 3 ft. long on high abrupt bluff in a rock mound as instructed on West side of a deep Canada in ¼ section corner between sections 14 and 23,

From which a

Fir 20 in. dia. brs. N. 60° W., 29 lks.

Thence

West between sections 14 and 23.

Var. 14¼° East.

Along North slope of mountains.

- 40.00 Set an Oak post 4 x 4 in., $3\frac{1}{2}$ ft. long in a mound of rocks near foot of high abrupt mountains, as instructed, for corner to sections 14, 15, 22 and 23,

From which a

Live Oak 14 in. dia. brs. N. $27\frac{1}{2}^{\circ}$ W., 29 lks.

Land very rough. mountains. Good Pine timber in the Canadas and scattering Fir in the mountains.

-----o-----

North between sections 14 and 15.

Var. $14\frac{1}{4}^{\circ}$ East.

Descending.

- 8.50 Cross dry gulch 50 lks. wide.
- 29.00 Cross creek 06 chs. wide, the West fork of the San Gabriel, course East, thence ascend
- 40.00 Set a Redwood post 3 x 3 in. $3\frac{1}{2}$ ft. long in a mound of rocks as per instructions, for quarter sections corner.
- 80.00 Center of deep gulch, course Southeast not a suitable place to build a monument I set an Oak post 3 x 3 in., 3 ft. long in a mound rocks 2.50 chs. to sections 10, 11, 14 and 15.
- Land very rough. Timber scattering Pine, Fir and Oak.

-----o-----

From the corner to sections 14, 15, 22 and 23 I run, West on a true line between sections 15 and 22.

Var. $14\frac{1}{2}^{\circ}$ East.

- 12.00 Cross gulch 50 links wide, course Northeast.
- 40.00 Set a Redwood post 3 x 3 in., $3\frac{1}{2}$ ft. long in a rock mound as instructed, for $\frac{1}{4}$ section corner,
- From which a
- Norway Pine 3 ft. dia. brs. N. 49° W., 27 lks.
- 12.00 Cross gulch 50 lks. wide, course Northeast.
- 40.00 Set a Redwood post 3 x 3 in., $3\frac{1}{2}$ ft. long in a rock mound, as instructed, for $\frac{1}{4}$ section corner,

From which a

Norway Pine 3 ft. dia. brs. N. 29° W., 27 lks.

- 80.00 Set a Pine post 4 x 4 in. $3\frac{1}{4}$ ft. long in a rock mound as instructed for corner to section 15, 16, 21 and 22. Land along North slope of mountains second rate.

-----o-----

Being unable to proceed further on this line I return to corner to sections 15, 16, 21 and 22.

North between sections 15 and 16.

Var. $14\frac{1}{4}$ ° East.

Descending.

- 7.50 Cross creek 06 chs. wide, branch of the San Gabriel, course Southeast, thence ascend.
- 40.00 Set a Pine post 3 x 3 in., $3\frac{1}{2}$ ft. long in a rock mound, as instructed, for $\frac{1}{4}$ section corner on summit of spur, course East and West.
- Thence descending.
- 64.50 Cross gulch 1.00 chs. wide, course Southeast and descend.
- 80.00 Set a Pine post 4 x 4 in., $3\frac{1}{2}$ ft. in a large mound of rocks as instructed for corner to sections 9, 10, 15 and 16.

Land very rough; timber scattering Pine.

-----o-----

From the corner to sections 15, 16, 21 and 22 I run, West on a true line between sections 16 and 21.

Var. $14\frac{1}{4}$ ° East.

Along on slope of hill.

- 40.00 The point for $\frac{1}{4}$ section falling in deep gulch, course Northeast, not a suitable place to build a monument, I set an Oak post 3 x 3 in., $3\frac{1}{2}$ ft. long in a rock mound as instructed 150 chs. West for witness to $\frac{1}{4}$ section corner,

From which bears a

Fir 2 ft. dia. bears N. 18° E., 60 lks. dist.

79.00 Enter Canada

80.00 Set an Alder post 4 x 4 in., 3½ ft. long in a mound of earth and pits, as instructed, for corner to sections, 16, 17, 20 and 21,

From which an

Alder 6 in. dia. brs. N. 18½° W., 60 lks.

Land along foot of high mountains. Scattering timber of Pine, Fir and Oak.

-----o-----

From the corner to sections 16, 17, 20 and 21 I run North between sections 16 and 17.

Var. 14¼° East.

2.50 Cross creek 6 lks. wide, course East.

6.50 Leave Canada and ascend over foot of hills

30.00 Cross dry gulch 50 lks. wide, course Southeast, thence ascend.

40.00 Set a Pine post 3 x 3 in. 3½ ft. long in a rock mound as instructed for ¼ sections corner,

From which bears a

Norway Pine 3 ft. dia. brs. N. 40° W., 70 lks.

The land here crosses a deep Canada too rough to measure this line further North, I, therefore, run West on ¼ line through sections 17

Var. 14¼° East.

15.50 Cross dry gulch 50 lks. wide, course Southeast.

40.00 Set a Pine post 3 x 3 in., 3½ ft. long for center of section 17. North ¼ section line through section 17.

19.50 To edge of dry gulch course Southeast.

20.00 Over same and ascend.

40.00 To the line between sections 8 and 17, set an Oak post 3 x 3 in., 3½ ft. long as instructed in a rock mound, for ¼ section

From which a

Fir 2 ft. dia. brs. N. 71° W. 45 lks. dist.

From the corner to sections 16, 17, 20 and 21 I run West on a true line between sections 17 and 20.

Var. 14 $\frac{1}{4}$ ° East.

10.00 Enter gulch, course N. 30° E., Thence up gulch about 1.00 chs. wide.

40.00 Point for $\frac{1}{4}$ section corner falling in center of gulch I set an Oak post 3 x 3 in., 3 ft. long in a mound of rocks as instructed, 1.50 chs. North for witness to $\frac{1}{4}$ section corner,

From which an

Alder 10 in. dia. brs. S. 28° W., 1.10 chs. dist.

44.50 Leave gulch, thence along on North side of same.

72.00 Cross dry gulch 50 lks. wide, course Southeast and ascending.

80.00 Set an Oak post 4 x 4 in., 3 $\frac{1}{4}$ ft. long in a mound of rocks, as instructed, for corner to sections 17, 18, 19 and 20.

Land along Canada good grazing. Second rate timber Pine, Alder and Fir.

The land South is too rough and worthless to measure, also the line to sections 18 and 19,

I run

North between sections 17 and 18.

Var. 14 $\frac{1}{4}$ ° East.

5.00 I cross old trail in Canadas, course Northwest and Southeast.

9.00 Cross gulch 50 lks. wide in ravine and ascending.

40.00 Set a Redwood post 3 x 3 in. 3 ft. long in a rock mound as instructed for $\frac{1}{4}$ section corner,

From which bears a

Redwood 6 in. dia. 18° West, 21 lks. dist.

44.00 Summit of spur, course Northwest and Southeast.

Descend.

80.00 Set a Pine post 4 x 4 in., $3\frac{1}{2}$ ft. long in a rock mound, as instructed, for corner to sections 7, 8, 17 and 18. Land rough. Second rate. Pine and Fir.

-----o-----

From $\frac{1}{4}$ section corner between sections 17 and 18, I run through center of section 18.

Var. $14\frac{1}{4}^{\circ}$ East.

20.00 Cross trail, course Northwest and Southeast.

20.50 Gulch 50 lks. wide, course Southeast and ascend.

40.00 Set a Redwood post 3 x 3 in., $3\frac{1}{2}$ ft. long in a mound of rocks as instructed, for $\frac{1}{4}$ center section corner to section 18,

from which a

Redwood 6 in. dia. brs. N. 12° W., 27 lks.

From this corner I run South on $\frac{1}{4}$ section line through section 18.

Var. $14\frac{1}{4}^{\circ}$ East.

22.50 Cross gulch 50 lks. wide, course Southeast.

40.00 To point for $\frac{1}{4}$ section corner falling in deep gulch, course Northeast, not a suitable place to build a monument I set a Pine post 3 x 3 in., $3\frac{1}{2}$ ft. long in a mound of rocks, as instructed, for witness to temporary $\frac{1}{4}$ section corner, 1.00/chs. South,

From which a

Pine 3 ft. dia. brs. N. 65° E., 29 lks.

-----o-----

West on a random line between sections 18 and 19.

Same variation.

40.18 Intersect the Western boundary of T. 11 lks. North of the corner to sections 18 and 19, from this corner I run, North $89^{\circ} 51'$ east, on a true line between sections 18 and 19.

Var. $15\frac{1}{4}^{\circ}$ East.

40.18 The point for $\frac{1}{4}$ section corner between sections 18
and 19.

Land very rough, good scattering Pine, Fir, Liver Oak
and Redwood Brush.

-----oooo00oooo-----