ASPLUNDH CONSTRUCTION CORP.

SOUTHERN CALIFORNIA EDISON
An EDISON INTERNATIONAL Company

DETERIORATED POLE REPLACEMENT

CIRCUIT (S):
GOODE 12KV o/o QUARTZ HILL SUB

STA'S 5-6

ADDRESS:
LOCATION: COLUMBIA WY S/S 1150' W/O 55TH ST W
CITY: QUARTZ HILL
*** NOTES: RENTER- TIME WARNER**
BULLETIN 322

TRANSFER (S):
2/C 6B-12KV
3/C 4B-120V (W)
3/C 2A-120V (E)
2/C 6B-120V (S)
1-100W SL

5 RM 612521E
40' Class C5
RM: 1– POLE 40' CLASS 5 WOOD FULL TREAT
RM: 1– XA SNGL FB 10' STEEL PINS
RM: 2– XA SNGL FB 10' STEEL PINS SECONDARY
RM: 2– INS GLASS & PIN 12KV
RM: 7– SEC ROLLER (166–CLEVIS & SPOOL)
RM: 1– AG SPAN GUY 9/32" – 200'
RM: 4– SEC STEEL PIN & INS – PHASE
RM: 1– SEC STEEL PIN & INS – NEUTRAL
RM: 1– SEC 2" PVC FOR UNDER ARM W/#2 TW

SET 1' WEST
POLE 612521E 6
45' Class H1
IN: 1– POLE 45' CLASS H1 WOOD FULL TREAT
IN: 1– XA SNGL FB 10' STEEL PINS
IN: 2– XA SNGL FB 10' STEEL PINS SECONDARY
IN: 2– INS POLY W/PIN 12KV CLMP #6–4/0 CU
IN: 9– SEC ROLLER (166–CLEVIS & SPOOL)
IN: 1– AG SPAN GUY 9/32" – 200'
IN: 4– SEC STEEL PIN & INS – PHASE
IN: 1– SEC STEEL PIN & INS – NEUTRAL
IN: 1– SEC 2" PVC FOR UNDER ARM W/#2 TW
IN: 1– AG BLOCK & POLE KEY

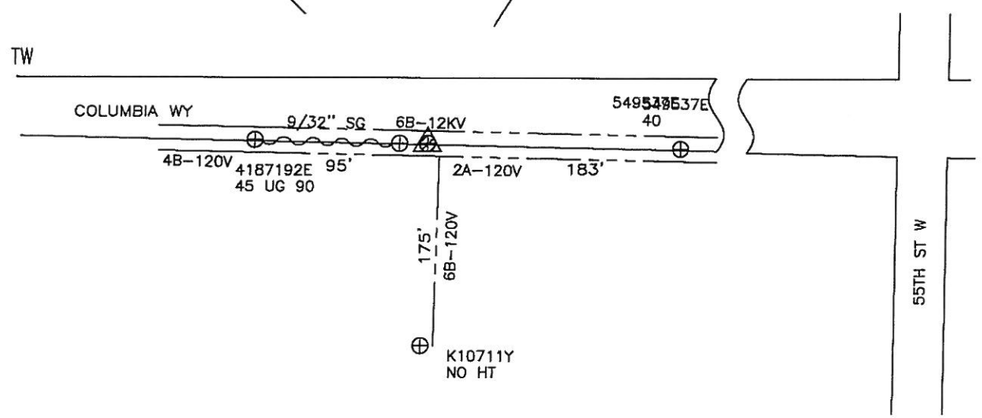

NOT TO SCALE

PERMIT REQ'D.	
CALTRANS:	
ENCROACHMENT:	
RAILROAD:	
HELICOPTER:	
OTHER:	

SPEED LIMIT 45

PEDESTRIAN TRAFFIC CONTROL REQUIRED
☐ YES ☒ NO

GPS: LAT: N 34° 38' 43.81"
LONG: W 118° 13' 52.18"

TLM DATA:

	SIZE	KVA	CUST.	% LOAD
EXIST				
PROP.				

VOLTAGE DROP ____ %
PRI. CIRC. _____

NOTES	
JOINT POLE:	X
RENTER:	X
MITC FUME:	
JOINT MEET:	
TRUCK ACCESS:	X
HAND SET:	
CONTACT CATV:	X
ENVIRONMENTAL:	
REAL PROP. REVIEW:	
PAVEMENT REPAIR:	
☐ CONCRETE / ☐ ASPHALT	____X____

DISTRICT	PROJ. MGR.	PLANNER	
36 – ANTELOPE VALLEY	RODRIGUEZ, JOHN T. PHONE 909–469–0219	CHENIER, WARREN PHONE 714–893–2405	

FOREMAN	TRUCK NO.	P/E	INVENTORY MAP NO.	THOMAS GUIDE	GRID NO.	DESIGN NO.
			135–73A	LA 4104–G6		592235_0.01

CSD 140 Y___ N___	BY–PASS CODE	EXISTING ___ CHANGE TO ___	TLM CHECKED ___ %LOAD	J.P.A. NO. 4063669 11	ASSOCIATED DESIGN NO.

PRODUCT/SAP NO.	PRODUCT/SAP NO.	PRODUCT/SAP NO.
848899-INFRA REP - DET POLE RELACE		

TYPE	APPROVED BY	DATE	CHECKED BY	DRAWN BY	PAX #
				AC	

PROPOSED CONSTRUCTION (LOCATION)
DET POLE REPLACEMENT
VARLOC VARIOUS LANCASTER CA 93534
LANCASTER

SHEET ___ OF ___

JOB NO. 592235_0.01

Southern California Edison Company