


Copied from Photographic Copies  
 furnished by  
 U.S. General Land Office  
 Washington, D. C.

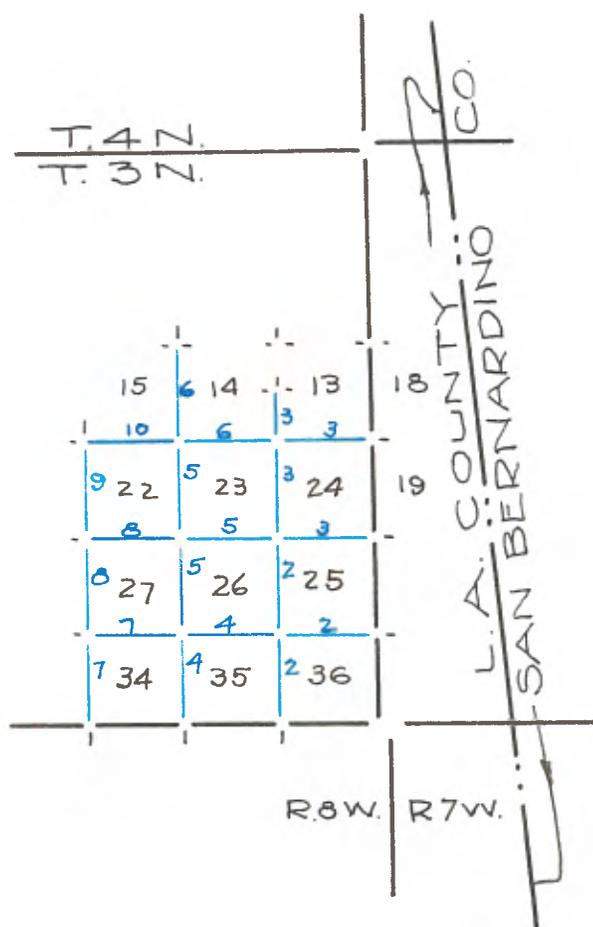

Blue Lines Run by G.W. Pearson 1884

PRELIMINARY OATHS OF ASSISTANTS.

I, Gus Williams, do solemnly swear that I will well and truly perform the duties of compassman, according to instructions given me, and to the best of my skill and ability, in the survey of the Subdivision Lines of Township 3 North, Range 8 West, San Bernardino Meridian, Cal.

Gus Williams, Compassman

Subscribed and sworn to before me this 11th day of February, 1884

S. Musselman, J. P.

SEAL

In and for San Bernardino Co. Cal.

---

We, Theo F. Wyman, Fred Albrecht, George McFarlane and David Stokes, do solemnly swear that we will well and faithfully execute the duties of chain carriers; that we will level the chain upon even and uneven ground and plumb the tally pins, either by sticking or dropping the same; that we will report the true distance to all notable objects, and the true length of all lines that we assist in measuring, to the best of our skill and ability, and in accordance with instructions given us, in the survey of the Subdivision lines of Tp. 3 North, Range 8 West, San Bernardino Meridian.

Theo. F. Wyman, Chainman,  
Fred Albrecht, Chainman,  
George McFarlane, Chainman,  
David Stokes, Chainman,

Subscribed and sworn to before me this 11th day of February 1884.

S. Musselman, J. P.

SEAL

In and for San Bernardino Co. Cal.

---

We, Jeff E. Henderson and H. E. Mason, do solemnly swear that we will well and truly perform the duties of axemen, in the establishment of corners and other duties, according to instructions given us, and to the best of our skill and ability, in the survey of The Subdivision Lines of Tp. 3 North, Range 8 West, San Bernardino Meridian, Cal.

Jeff H. Henderson, Axeman,  
H. E. Mason, Axeman,

Subscribed and sworn to before me this 11th day of February, 1884.

SEAL

S. Musselman, J. P.  
In and for San Bernardino Co. Cal.

---

T. 3 N., R. 5 W., S. B. M.

From the established corner to Secs. 35 and 36, 1 and 2,  
on the South boundary of Township, I run

North between Sections 35 and 36.  
Var.  $14^{\circ}28'$  E.

Ascending.

11.50 Summit of Ridge bears N.E. & S.W. and descend.  
27.50 Set granite stone 19 x 10 x 8 in. 14 ins. in the ground  
for  $\frac{1}{4}$  Sec. Cor. marked  $\frac{1}{4}$  on W. face and raised mound of  
stone alongside. Pits impracticable.  
40.50 Ravine 70 lks. wide, course S.W. and ascend.  
60.00 Summit of Ridge, bears N.E. and S.W. and descend.  
67.50 Set granite stone 12 x 9 x 8 ins. 7 ins. in the ground  
for cor. to Sections 25, 26, 35 & 36 marked with 1 notch  
on S. and E. edges, and raised mound of stone alongside.  
Pits impracticable.  
Land mountainous. Soil 3rd rate.  
Dense undergrowth of Chaparral.  
No timber.

-----  
East on a random line between Section 25 & 36.  
Var.  $14^{\circ}28'$  E.

40.00 Set a temporary  $\frac{1}{4}$  Sec. Cor.  
74.46 Intersect East boundary of Township 49 lks. S. of Cor.  
to Secs. 25, 30, 31 & 36.  
Thence  
I run S.  $89^{\circ}39'$  West on a true line between Sections  
25 and 36 with same variation.  
Descend.  
13.50 Ravine 50 lks. wide, course S.W. and ascend.  
34.46 Set granite stone 14x11x6 ins. 9 ins. in the ground  
for  $\frac{1}{4}$  sec. cor. marked  $\frac{1}{4}$  on N. base and raised mound  
of stone alongside.  
Pits impracticable.  
65.60 Top of Ridge bears N.E. & S.W. and descend.  
74.46 The cor. to Secs. 25, 26, 35 & 36.  
Land mountainous.  
Soil 3d rate.  
Timber. Scattering Pine in Ravine.  
Dense undergrowth of Chaparral.

-----  
North between Sections 25 and 26.  
Var.  $14^{\circ}28'$  E.

Descend.  
12.00 Ravine 1.40 chs. wide, course S.  $60^{\circ}$  W. and ascend.  
39.00 Top of Ridge bears N.  $50^{\circ}$  E. & S.  $50^{\circ}$  W. and descend.  
40.00 Set granite stone 24x12x6 ins. 18 ins. in the ground  
for  $\frac{1}{4}$  sec. corner marked  $\frac{1}{4}$  on W. face and raised mound  
of stone alongside.  
Pits impracticable.  
72.00 Ravine 50 lks. wide, course S.W. and ascend.  
80.00 Set granite stone 14x11x6 ins. 7 ins. in the ground  
for corner to Secs. 23, 24, 25 and 26, marked with 2 notches  
on the S. and 1 notch on East edges, and raised mound of  
stone alongside.  
Pits impracticable. Land mountainous. Soil 3d rate.  
Timber, none. Dense undergrowth of Chaparral.

T. 3 N., R. 8 W., S. B. M.

- East on a random line bet. Secs. 24 & 25.  
Var. 14°28' E.
- 40.00 Set temporary  $\frac{1}{4}$  Sec. cor.  
75.08 Intersect East boundary of Tp. 27 lks. North cor. to Secs.  
19, 24, 25 and 30.  
Thence I run.  
North 89°48' West on a true line between Secs. 24 and 25.  
Var. 14°28' E.
- 16.50 Ascend.  
35.08 Top of Ridge bears N.E. & S.W. and descend.  
Set sand rock 26 x 18 x 11 ins. 20 ins. in the ground for  
 $\frac{1}{4}$  Sec. cor. marked  $\frac{1}{4}$  on N. face and dug pits 18 x 18 x 12  
ins. E. & W. of stone 5 $\frac{1}{2}$  ft. dist. and raised mound of earth  
1 $\frac{1}{2}$  ft. high 3 $\frac{1}{2}$  ft. base alongside.
- 50.00 Ravine 80 lks. wide, corner S.W. and ascend.  
75.08 The cor. to Secs. 23, 24, 25 & 26.  
Land mountainous. Soil 3d rate.  
Timber Pine & Oak in the ravine.  
Dense undergrowth of Chaparral.
- 
- North between Sections 23 and 24.  
Var. 14°28' E.
- Ascending.
- 10.00 Summit of Ridge bears N. 70° E. & S. 70° W. and descend.  
33.00 Ravine 1.10 chs. wide, course S.W. and ascend.  
40.00 Set granite stone 15x11x10 ins. 10 ins. in the ground for  
 $\frac{1}{4}$  Sec. Cor. marked  $\frac{1}{4}$  on W. face and raised a mound of stone  
alongside.  
Pits impracticable.
- 70.50 Top of Ridge bears N.E. & S.W. and descend.  
80.00 Set sand stone 18 x 13 x 7 ins. 13 ins. in the ground for  
corner to Secs. 13, 14, 23 and 24, marked with 3 notches  
on the S. and 1 notch on the E. edges, and raised mound of  
stone alongside. Pits impracticable.  
Land mountainous. Soil 3d rate.  
Timber none. Dense undergrowth of Chaparral.
- 
- East on a random line between Sections 13 and 24.  
Var. 14°28' E.
- 40.00 Set temporary  $\frac{1}{4}$  sec. cor.  
74.51 Intersect East boundary of Tp. 53 lks. N. of cor. to  
Secs. 13, 18, 19 and 24.  
Thence  
I run N. 89°37' W. on a true line between Sections 13 & 24.  
Var. 14°28' E.
- Descend.
- 5.00 Ravine 75 lks. wide, course S.W. and ascend.  
34.51 Set sand stone 16 x 10 x 6 ins. 11 ins. in the ground for  
 $\frac{1}{4}$  sec. cor. marked  $\frac{1}{4}$  on N. face and raised mound of stone  
alongside. Pits impracticable.
- 74.51 The cor. to Secs. 13, 14, 23 & 24.  
Land mountainous. Soil 3d rate.  
Timber none. Dense undergrowth of Chaparral.
- 
- North on a random line between Sections 13 and 14.  
Var. 14°28' E.
- 40.19 To a point 5.11 chs. east of the  $\frac{1}{4}$  sec. cor. between  
Sections 13 and 14, which is a granite stone 8 ins. above  
ground firmly set and marked  $\frac{1}{4}$  on W. face.

From which bears a yellow pine 26 ins. diam. N. 29° W. 30  
lks. dist.  
Marked  $\frac{1}{4}$  S.B.T.  
Yellow Pine. 12 ins. diam. N. 23 $\frac{1}{2}$ ° E. 63 lks. dist.  
Marked  $\frac{1}{4}$  S.B.T.  
Thence I run S. 7° 15' E. on a true line between Secs. 13  
and 14.

Va. 14° 28' E.

40.19 Ascending.  
The Cor. to Secs. 13, 14, 23 & 24.  
Land mountainous.  
Soil 3d rate.  
Timber of scattering pine.  
Dense undergrowth of chaparral.

---

From the Cor. to Secs. 34, 35, 2 and 3 on the south  
boundary of Township, I run North between Sections  
34 and 35.

Var. 14° 28' E.

7.60 Descend.  
Ravine 90 lks. wide. Course West and  
Ascend.  
27.80 Set sand stone 15x11x7 ins.  
9 ins. in the ground for  $\frac{1}{4}$  Sec. Cor.  
Marked  $\frac{1}{4}$  on N. face and raised a mound of stone alongside.  
Pits impracticable.  
37.00 Top of Ridge bears N. 70° E. & S. 70° W. and  
descend.  
63.10 Ravine 1.10 ch. wide; Course S. 85° West and ascend.  
67.80 Set sand stone 29 x 16 x 7 --- ins. & 20 ins. in the  
ground for Corner to Secs. 26, 27, 34 and 35. Marked  
with 1 notch on S. and 2 notches on the East.  
From which bears a Oak. 18 ins. diam. S. 80° E. 220 lks.  
dist. Marked Tp. 3 N. Sec. 35 B.T.  
Pine. 20 ins. diam. N. 62° W. 160 lks. dist.  
Marked Rg. 8 W. Sec. 27 B.T.  
No other trees within limits.  
Land mountainous.  
Soil 3rd rate.  
Timber some pine and oak in ravine.  
Dense undergrowth of chaparral.

---

East on a random line between Sections 26 & 35.  
Var. 14° 28' E.

---

40.00 Set temporary  $\frac{1}{4}$  Sec. Cor.  
80.32 Intersect N. and S. line 34 lks. South of Cor. to Secs.  
25, 26, 35 and 36.  
Thence I run S. 89° 45' West on a true line between  
Sections 26 and 35.

Va. 14° 28' E.

40.16 Descend.  
Set sand stone 18 x 12 x 4 ins.  
13 ins. in the ground for  $\frac{1}{4}$  Sec. Corner marked  $\frac{1}{4}$  on N. face  
and raised a mound of stone alongside.  
Pits impracticable.  
50.00 Ravine 75 lks. wide. Course S.W. and  
Ascend.  
80.32 The Cor. to Secs. 26, 27, 34 & 35.  
Land mountainous.  
Soil 3d rate.  
Timber scattering pine and oak in the ravine.  
Dense undergrowth of chaparral.

T. 3 N., R. 8 W., S. B. M.

North between Sections 26 and 27,  
Va. 14°28' E.

---

- Ascend  
8.50 Top of Ridge bears N. 65° E. and S. 65° W. and descend.  
38.00 Ravine 80 lks. wide. Course S.W. and  
ascend.  
40.00 Set granite stone 26x11x8 ins. 18 ins. in the ground for  
1/4 Sec. Corner marked 1/4 on W. face and raised a mound  
of stone alongside.  
Pits impracticable.
- 57.50 Top of ridge bears S. 80° W. and N. 80° E. and  
descend.  
74.00 Ravine 2.00 chains wide. Course N.W. and  
ascend.  
80.00 Set a post 5x5 ins. 5 ft. long with marked stone 12 ins.  
in the ground for Corner to Sec. 22, 23, 26 and 27,  
marked,  
Tp. 3 N. Sec. 23 on N.E.  
R. 8 W. Sec. 26 on S.E.  
Sec. 27 on S.W.  
and Sec. 22 on N.W. faces  
and dug pits 18x18x12 ins. in each Section 5 1/2 ft. distant  
and raised earth and stone mound alongside.  
Land Mountainous.  
Soil 3rd rate.  
Timber, scattering pine and oak in the ravine.  
Dense undergrowth of chaparral.
- 

East on a random line between Sections 23 and 26.  
Va. 14°28' E.

---

- 40.00 Set temporary 1/4 Sec. Cor.  
80.27 Intersect N. and S. line 20 lks. N. of Cor.  
to Secs. 23-24, 25 and 26.  
Thence I run N. 89°51' W. on a true line between Sections  
23 and 26,  
Va. 14°28' E.
- Ascending  
26.00 Top of ridge bears N. 50° E. and S. 50° W. and  
Descend.  
40.14 Set granite stone 22x19x3 ins. 17 ins. in the ground for  
1/4 Sec. Cor. marked 1/4 on N. face and raised mound of stone  
alongside.  
Pits impracticable.  
57.20 Ravine 90 lks. wide. Course S.W. and  
ascend.  
80.27 The Cor. to Secs. 22, 23, 26 and 27.  
Land mountainous.  
Soil 3rd rate.  
Timber - Pine and Oak in ravine.  
Dense undergrowth of chaparral.

March 15th, 1854.

---

North between Sections 22 and 23.  
Va. 14°28' E.

---

T. 3 N., R. 8 W., S. B. M.

- Ascending.  
 25.70 Top of ridge bears N. 80° E. and S. 80° W. and  
 Descend  
 40.00 Set sand stone 18x11x9 ins. 13 ins. in the ground for  
 ¼ Sec. Cor. marked ¼ on W. face, and raised mound of  
 stone alongside.  
 Pits impracticable.  
 62.50 Ravine. 1.30 ch. wide. Course West and  
 ascend.  
 80.00 Set granite stone 13x12x9 ins. 8 ins. in the ground for  
 Corner to Secs. 14, 15, 22 and 23,  
 marked with 3 notches on the South and 2 notches on the  
 E. edges, and raised mound of stone alongside.  
 Pits impracticable.  
 Land mountainous.  
 Soil 3rd rate.  
 Timber - Pine and Oak in ravine.  
 Dense undergrowth of Chaparral.
- 
- East on a random line between Secs. 14 and 23  
 Va. 14° 25' E.
- 
- 40.00 Set temporary ¼ Sec. Cor.  
 50.52 Intersect N. and S. line 42 lks. N. of corner to  
 Secs. 13, 14, 23 and 24.  
 Thence I run N. 89° 42' West on a true line between  
 Secs. 14 and 23.  
 Va. 14° 25' E.
- Descending.  
 40.26 Set sand stone 24x13x9 ins. 18 ins. in the ground for ¼  
 Sec. Corner marked ¼ on N. face and dug pits 18x18x12 ins.  
 E. and W. of stone 5½ ft. distant and raised mound of  
 earth 1½ ft. high, 3½ ft. base alongside.  
 43.50 Ravine 1.00 ch. wide. Course S.W. and  
 Ascend.  
 59.00 Point of spur bears S.W. and  
 Descend.  
 66.00 Ravine 60 lks. wide. Course S. 10° W. and  
 Ascend.  
 80.52 The Cor. to Secs. 14, 15, 22 and 23.  
 Land mountainous.  
 Soil 3rd rate.  
 Timber - Pine and Oak in ravine.  
 Dense undergrowth of Chaparral.
- 
- North on a random line between Sections 14 and 15.  
 Va. 14° 25' E.
- 
- 40.00 Set temporary ¼ Sec. Cor.  
 50.48 To a point 5.13 chs. East of the Corner to Sections  
 10, 11, 14 and 15, which is a granite stone 5 ins. above  
 ground marked with 4 notches on the S. and 2 notches on the  
 E. edges, with mound of rocks around.  
 Thence I run  
 S. 3° 39' East on a true line between Secs. 14 and 15.  
 Va. 14° 25' E.
- 
- Ascending.  
 22.00 Top of ridge bears N. 40° E. and S. 40° E. and  
 descend.

T. 3 N., R. 8 W., S. B. M.

- 40.24 Set granite stone 16x10x9 ins. 11 ins. in the ground for  $\frac{1}{4}$  Sec. Corner marked  $\frac{1}{4}$  on W. face and raised mound of rocks around.  
Pits impracticable.
- 53.50 Ravine 80 lks. wide. Course West and ascend.
- 74.50 Top of ridge bears N.E. and S.W. and descend.
- 80.48 The Cor. to Secs. 14, 15, 22 and 23.  
Land mountainous.  
Soil 3rd rate.  
Timber - Pine and Oak in Ravines.  
Dense undergrowth of Chaparral.
- 

From the Cor. to Sections 33, 34, 3 and 4, on the South boundary of Township, I run North between Sections 33 and 34,

Va. 14° 28' E.

---

- Descending.
- 25.30 Ravine 1.60 ch. wide. Course West and Ascend.
- 27.80 Set Granite stone 13x11x9 ins. 8 ins. in the ground for  $\frac{1}{4}$  Sec. Corner marked  $\frac{1}{4}$  on W. face and raised a mound of stone alongside.  
Pits impracticable.
- 65.00 Top of ridge bears No. 80° E. and S. 80° West and Descend.
- 66.20 Enter timber bears E. and W. about 20 chs.
- 67.80 Set post 4x4 ins. 4 ft. long with marked stone 12 ins. in the ground for Corner to Secs. 27, 28, 33 and 34, marked  
T. 3 N., Sec. 27 on the N.E.  
R. 8 W., Sec. 34 on the S.E.  
Sec. 33 on the S.W.  
and Sec. 28 on the N.W. faces  
From which bears a  
Pine 14 ins. diam. N. 60° E. 120 lks. distant marked  
T. 3 N. R. 8 W. Sec. 27 B. T.  
Pine 20 ins. diam. S. 22 $\frac{1}{2}$ ° E. 97 lks. distant  
Marked T. 3 N. R. 8 W., Sec. 34 B. T.  
Oak 16 ins. diam. S. 43° W. 170 lks. distant  
Marked T. 3 N. R. 8 W. S. 33 B.T.  
Pine 8 ins. diam. N. 63° W. 2 chs. distant  
Marked T. 3 N. R. 8 W., S. 28 E. T.  
Land mountainous.  
Soil 2nd rate.  
Timber - Pine and Oak 5.80 chs.  
Dense undergrowth of Chaparral, 71.20 chs.
- 

East on a random line between Sections 27 and 34.  
Var. 14° 28' E.

---

- 40.00 Set temporary  $\frac{1}{4}$  Sec. Cor.
- 79.90 Intersect N. and S. line 16 lks. N. of Corner to Secs. 26, 27, 34 and 35.  
Thence I run  
N. 89°53' W. on a true line between Secs. 27 and 34.  
Va. 14° 28' E.

Ascend gradually along S. slope of ridge.

T. 3 N., R. 8 W., S. B. M.

- 39.95 Set sand rock 14x10x9 ins. 9 ins. in the ground for 1/4 Sec. Corner marked 1/4 on N. face and raised mound of stone alongside.  
Pits impracticable.
- 44.00 Summit of ridge bears N. 80° E. and S. 80° W. and descend.
- 63.50 Enter heavy Pine timber, bears N. 10° E. and S. 10° W.
- 79.90 The Corner to Secs. 27, 28, 33 and 34.  
Land mountainous.  
Soil 2nd rate.  
Timber 16.50 chains. Pine and Oak.  
Dense undergrowth of Chaparral 63.50 chains.

-----  
North between Sections 27 and 28.  
Va. 14° 28' E.

- Descend.
- 13.00 Ravine 1.70 chs. wide. Course West and Ascend.
- 22.30 Leave timber. Bears N. 80° W. and S. 80° E. about 25 chs.
- 30.00 Point of spur bears West and descend.
- 40.00 Set sand stone 19x10x6 ins. 14 ins. in the ground for 1/4 Sec. Cor.  
Marked 1/4 on W. face and raised mound of stone alongside.  
Pits impracticable.
- 45.59 San Gabriel River 50 lks. wide. Course west in 3.60 chs. wide. Course W. and ascend.
- 50.00 Set granite rock 17x10x9 ins. 12 ins. in the ground for corner to Sections 21, 22, 27 and 28, marked with 2 notches on the S. and 3 notches on the E. edge and raised mound of stone alongside.  
Pits impracticable.  
Land mountainous.  
Soil 3rd rate.  
Timber - Pine and Oak along river.  
Dense undergrowth of Chaparral.

-----  
East on a random line between Secs. 22 and 27.  
Va. 14° 28' E.

- 40.00 Set temporary 1/4 Sec. Cor.
- 50.15 Intersect N. and S. line 35 lks. N. of Cor. to Secs. 22, 23, 26 and 27.  
Thence I run  
N. 89° 44' West on a true line between Secs. 22 and 27.  
Va. 14° 28' E.
- Descend along S. slope of Mountain.
- 40.09 Set granite stone 14x11x9 ins. 9 ins. in the ground for 1/4 Sec. Corner marked 1/4 on the N. face and raised mound of stone alongside.  
Pits impracticable.
- 66.00 San Gabriel River 60 lks. wide in canyon 2.70 chs. wide. Course S. 20° West and ascend.
- 80.15 The Cor. to Secs. 21, 22, 27 and 28.  
Land mountainous.  
Soil 3rd rate.  
Timber, Pine and Oak in canyon.  
Dense undergrowth of Chaparral.
-

T. 3 N., R. 8 W., S. B. M.

CHAINS:

- North between Sections 21 and 22,  
Var. 14°28' E.
- 23.00 Ascend along E. slope of mountain.  
Summit of Ridge bears N & S. 2½° W.  
thence,  
along summit.
- 40.00 Set sandstone 19 x 9 x 8 ins.  
14 ins. in the ground for ¼ Sec. Cor., marked ¼ on W. face and  
raised a mound of stone alongside.  
Pits impracticable.
- 50.00 Leave summit and descend along W. slope of ridge.
- 80.00 Set granite stone 14 x 9 x 6 ins. 9 ins. in the ground for  
corner to Secs. 15, 16, 21 and 22, marked with 3 notches on S.  
and E. edges and raised mound of stone alongside.  
Pits impracticable.  
Land mountainous.  
Soil 3rd rate.  
Timber none.  
Dense undergrowth of chaparral.
- 
- East on a random line bet. Sections 15 and 22,  
Var. 14°28' E.
- 40.00 Set temporary ¼ sec. cor.
- 80.30 Intersect N and S line 21 lks. N of corner to Secs. 14, 15, 22 and 23.  
Thence, I run,  
N. 89°51' West on a true line between Secs. 15 and 22,  
Var. 14°28' E.
- 5.00 Ascend  
Top of spur, bears S.W. and  
descend.
- 18.50 Ravine, 60 lks. wide, course S. and ascend.
- 23.00 Low point of spur bears S.E. and descend.
- 36.00 San Gabriel River, 60 lks. wide, course S. in Canon 2.00 chs. wide,  
course South and ascend.
- 40.15 Set granite stone 19 x 10 x 4 ins. 14 ins. in the ground for ¼ sec.  
corner marked ¼ on N. face and raised a mound of stone alongside.  
Pits impracticable.
- 50.00 Point of spur bears S.E. and descend.
- 63.00 Gulch 30 lks. wide, course S.E. and ascend.
- 77.00 Top of Ridge bears N and S and  
descend.